



RoHS and Reach Compliant

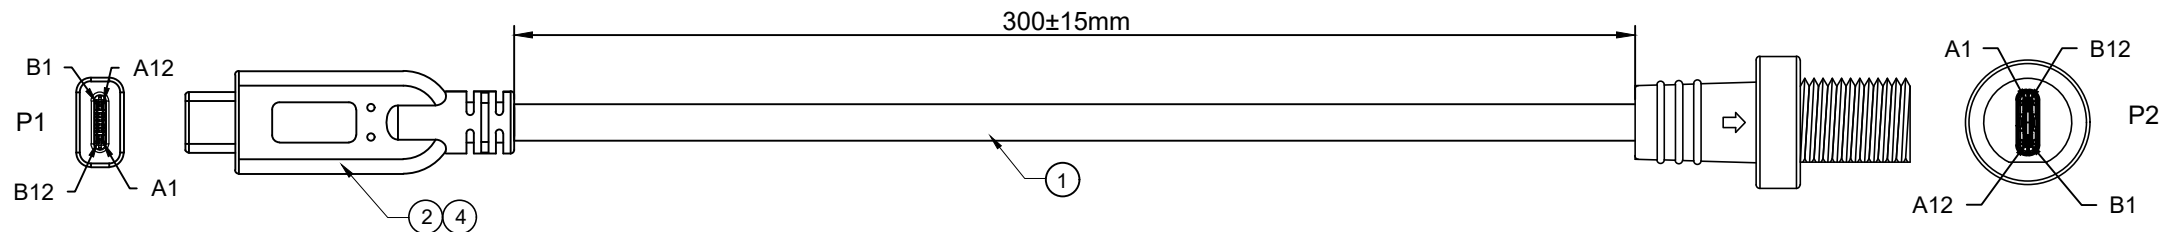

PIN ASSIGNMENT

P1				P2
A2	8			A2
A3				A3
A5				A5
A6				A6
A7			8	A7
A8				A8
B8				B8
A10		8		A10
A11				A11
B2			8	B2
B3				B3
B5				B5
B11			8	B11
B10				B10
A4+B4+A9+B9				A4+B4+A9+B9
A1+B1+A12+B12				A1+B1+A12+B12
SHELL				SHELL

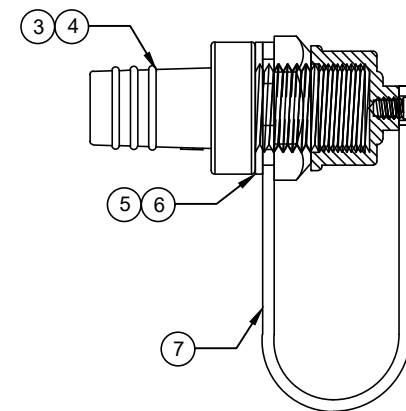

- NOTES:
- PIN ASSIGNMENT SEE TO WIRE LIST.
 - ELECTRICAL TEST CONDITION:
 - 100%OPEN,SHORT & MISWIRE TEST,
 - INSULATOR RESISTANCE:10 Mohm MIN.
DC 300V 0.01sec.
 - CONTACT RESISTANCE:3ohm MAX.

7	DUST COVER WITH TAPE.	
6	NUT:ABS MOLDED.	
5	O-RING: 11*1.5*14mm.	
4	OVERMOLD BLACK PVC 45P MA-001.	
3	TYPE C FEMALE BLACK PBT WITH NICKLE PLATED SHELL.	
2	TYPE C MALE BLACK PBT WITH NICKLE PLATED SHELL.	
1	(31AWG*1C+EAM)*4+32AWG*1P+32AWG*4C+24#*1C+2EAB(85%) OD:4.8MM BLACK PVC JACKET UL2725.	
NO.	Description	P/N

DWG NO:	PCM-0726	GOODS CODE		Draw	James	Date	2024/4/09	PREMIER CABLE MFG CO LTD	D		
ITEM NO.		DRAWING EVIDENCE		Check		Date			C		
Goods NO.				Approval		Date			B		
Original NO.		Unit(mm)							VER.A	REVISE	Date.