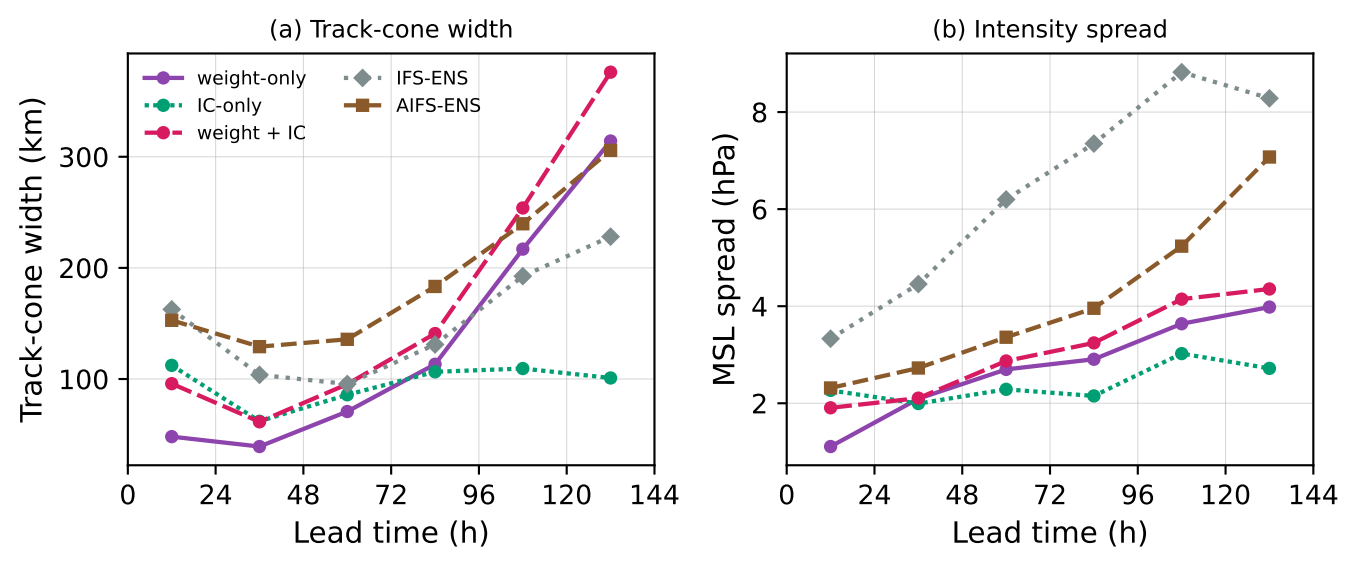
(a) Track-cone width
weight-only
IC-only
weight + IC
IFS-ENS
AIFS-ENS
Track-cone width (km)
100
200
300
0
24
48
72
96
120
144
Lead time (h)
(b) Intensity spread
MSL spread (hPa)
2
4
6
8
0
24
48
72
96
120
144
Lead time (h)