
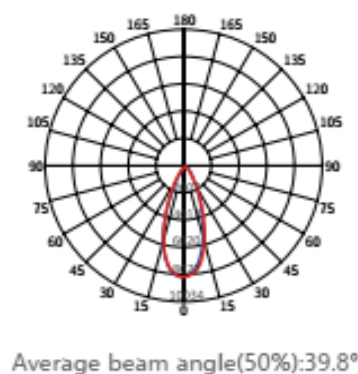


SPECIFICATION SHEET

PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F1		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

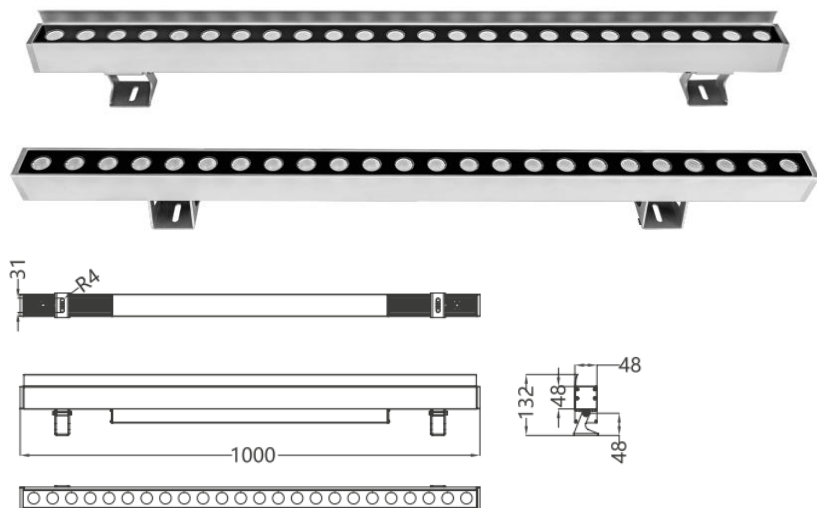

LIGHT FITTING DESCRIPTION	Zonlicht Linear Wallwasher Light - 1000mm
ACCESSORIES	Various Length of IP67 Lead Cable, Jump Cable and End Cap
ACCESSORIES	Mounting Bracket

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	-	132	1000	48	Signal Black RAL9004	Tempered Glass	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	60	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	-	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	RGBW	CONTROL INTERFACE	DMX 512
CRI (Ra)	80	MAX RUN PER CONNECTION	8M
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F1	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com

REMARK		PAGE
		1 of 11



SPECIFICATION SHEET



PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F2		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

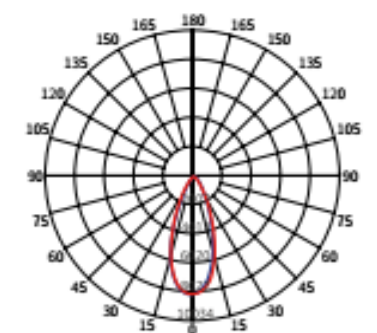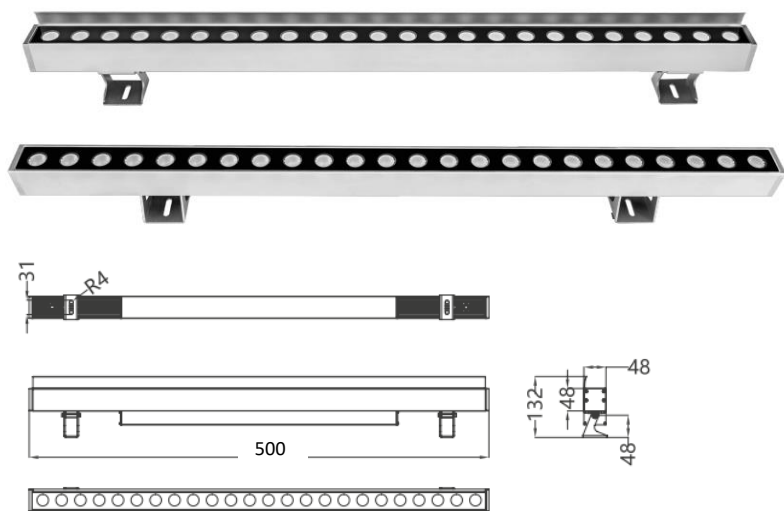

Average beam angle(50%):39.8°

LIGHT FITTING DESCRIPTION	Zonlicht Linear Wallwasher Light - 500mm
ACCESSORIES	Various Length of IP67 Lead Cable, Jump Cable and End Cap
ACCESSORIES	Mounting Bracket

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	-	132	500	48	Dark Grey	Tempered Glass	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	30	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	-	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	RGBW	CONTROL INTERFACE	DMX 512
CRI (Ra)	80	MAX RUN PER CONNECTION	8M
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F2	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com



REMARK		PAGE
		2 of 11

SPECIFICATION SHEET

PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F3		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

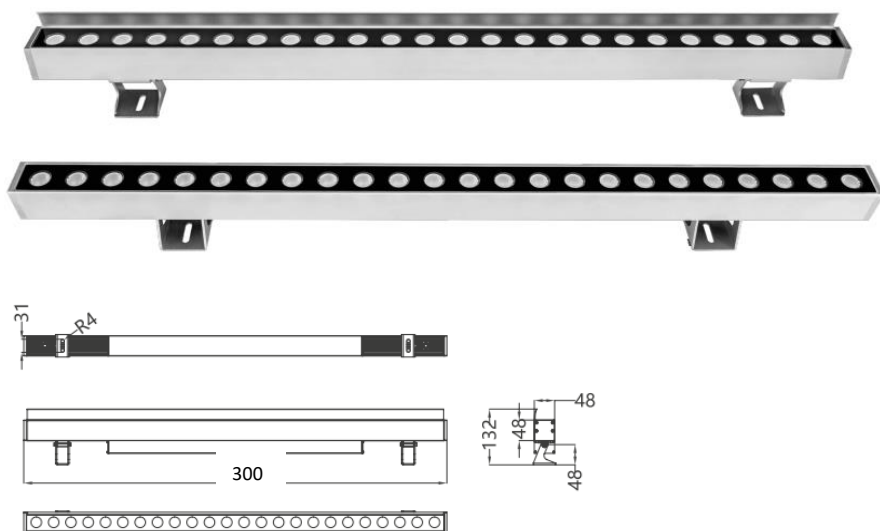

Average beam angle(50%):39.8°

LIGHT FITTING DESCRIPTION	Zonlicht Linear Wallwasher Light - 300mm
ACCESSORIES	Various Length of IP67 Lead Cable, Jump Cable and End Cap
ACCESSORIES	Mounting Bracket

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	-	132	300	48	Signal Black RAL9004	Tempered Glass	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	20	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	-	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	RGBW	CONTROL INTERFACE	DMX 512
CRI (Ra)	80	MAX RUN PER CONNECTION	8M
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F3	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com


REMARK		PAGE
		3 of 11

SPECIFICATION SHEET

PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F4		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

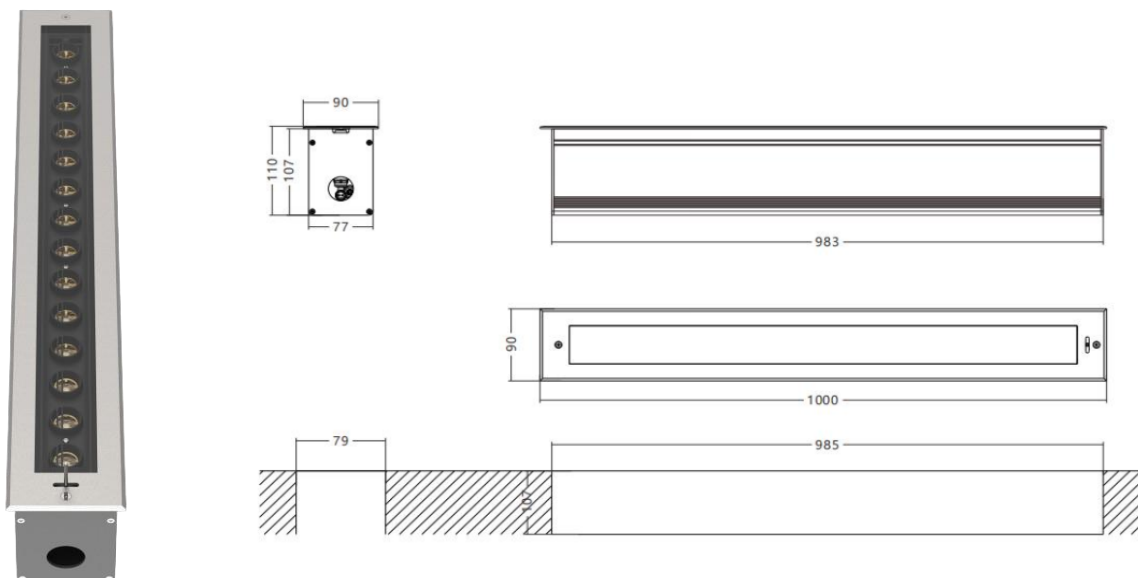

LIGHT FITTING DESCRIPTION	Zonlicht Inground Wallwasher Light - 1000mm
ACCESSORIES	Various Length of IP67 Lead Cable, Jump Cable and End Cap
ACCESSORIES	Mounting Sleeve

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
79*985	-	110	1000	90	Stainless Steel	Tempered Glass	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	50	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	3500	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	3000	CONTROL INTERFACE	ON /OFF
CRI (Ra)	80	MAX RUN PER CONNECTION	6M
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F4	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com


REMARK		PAGE
		4 of 11

SPECIFICATION SHEET

PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F5		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

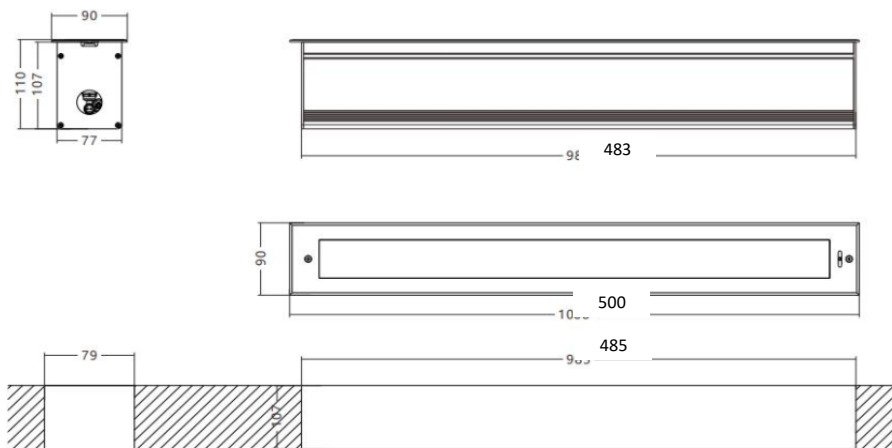

LIGHT FITTING DESCRIPTION	Zonlicht Inground Wallwasher Light - 500mm
ACCESSORIES	Various Length of IP67 Lead Cable, Jump Cable and End Cap
ACCESSORIES	Mounting Sleeve

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
79*485	-	110	500	90	Stainless Steel	Tempered Glass	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	25	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	1750	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	3000	CONTROL INTERFACE	ON /OFF
CRI (Ra)	80	MAX RUN PER CONNECTION	6M
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F5	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com

REMARK		PAGE
		5 of 11


SPECIFICATION SHEET



PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F6		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

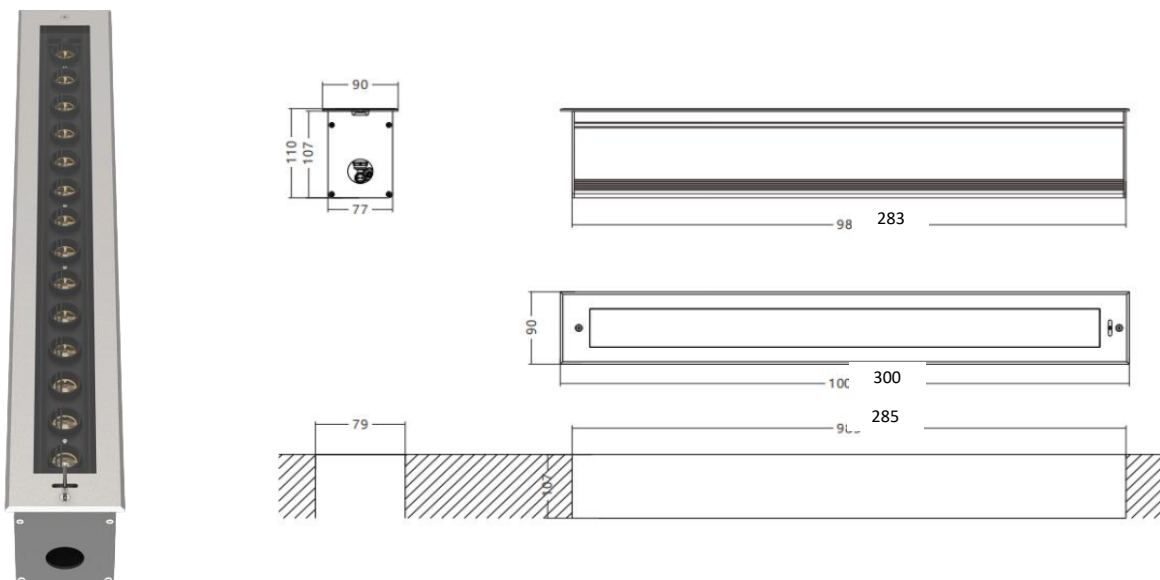

LIGHT FITTING DESCRIPTION	Zonlicht Inground Wallwasher Light - 1000mm
ACCESSORIES	Various Length of IP67 Lead Cable, Jump Cable and End Cap
ACCESSORIES	Mounting Sleeve

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
79*285	-	110	300	90	Stainless Steel	Tempered Glass	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	17	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	1190	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	3000	CONTROL INTERFACE	ON /OFF
CRI (Ra)	80	MAX RUN PER CONNECTION	6M
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F6	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com



REMARK		PAGE
		6 of 11

SPECIFICATION SHEET

PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F7		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue							
DATE	23-Oct-24	22-May-25							

PHOTO / ILLUSTRATION / DIAGRAM

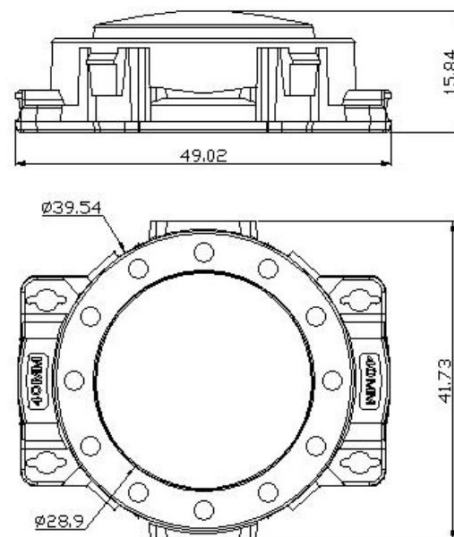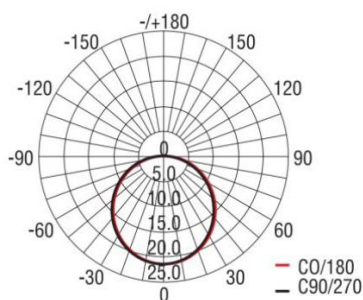

LIGHT FITTING DESCRIPTION	Zonlicht Pixel Point Light
ACCESSORIES	-
ACCESSORIES	-

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	39.54	15.84	-	-	Clear	-	✓	67

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	1.8	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	-	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	RGBW	CONTROL INTERFACE	DMX 512
CRI (Ra)	80	MAX RUN PER CONNECTION	20 UNIT
BEAM ANGLE (°)	120	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F7	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com

REMARK		PAGE
		7 of 11


SPECIFICATION SHEET



PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F8		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM

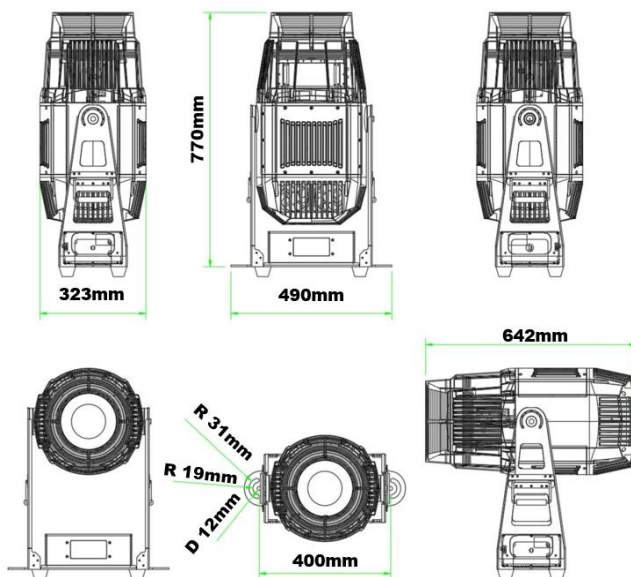

LIGHT FITTING DESCRIPTION	Zonlicht GOBO Projection Light
ACCESSORIES	-
ACCESSORIES	-

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	D 400	-	770	323	Signal Black RAL9004	-	✓	IP 67

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	1000	INPUT VOLTAGE	220-240V AC
LUMEN OUTPUT (lm)	>121980	INTEGRATED / REMOTE	INTEGRATED
COLOUR TEMPERATURE (CCT)	7500	CONTROL INTERFACE	DMX 512
CRI (Ra)	80	MAX RUN PER CONNECTION	-
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F8	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com



REMARK		PAGE
		8 of 11

SPECIFICATION SHEET



PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F9		
					REFER	KO-5161-R1			
ISSUE	1st Issue	2nd Issue							
DATE	23-Oct-24	22-May-25							

PHOTO / ILLUSTRATION / DIAGRAM



LIGHT FITTING DESCRIPTION	Zonlicht Linear Light Flex
ACCESSORIES	Snap Front Connector Kit & Snap End Cap Kit
ACCESSORIES	Mounting Clip

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	-	16.5	Vary	16.5	White	-	✓	68

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	10W/M	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	360lm/M	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	3000	CONTROL INTERFACE	DALI-2
CRI (Ra)	80	MAX RUN PER CONNECTION	10M
BEAM ANGLE (°)	120	CUTTABLE LENGTH	100mm
SDCM (Steps)	3	NOTES	- Installation methods submission required
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F9	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lhy@zonlichthk.com


REMARK		PAGE
		9 of 11

SPECIFICATION SHEET

PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F11		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM



LIGHT FITTING DESCRIPTION	Zonlicht Projector Light
ACCESSORIES	Mounting Bracket
ACCESSORIES	-

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	-	98	75	94	Signal Black RAL9004	Black	✓	65

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	10	INPUT VOLTAGE	24V DC
LUMEN OUTPUT (lm)	800	INTEGRATED / REMOTE	REMOTE
COLOUR TEMPERATURE (CCT)	3000	CONTROL INTERFACE	ON/OFF
CRI (Ra)	80	MAX RUN PER CONNECTION	8 UNIT
BEAM ANGLE (°)	TBA	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F11	MANUFACTURER	Zonlicht
SUPPLIER COMPANY	Micon Electronic (H.K) Ltd	CONTACT	Mr. Lin
MOBILE NUMBER	+86138-2393-0078	EMAIL	lh@zonlichthk.com

REMARK		PAGE
		10 of 11

SPECIFICATION SHEET



PROJECT	BCCK 2 FACADE - BORNEO CONVENTION CENTER KUCHING 2				AREA	Façade	BCCK2-F12		
					REFER	KO-5161-R1			

ISSUE	1st Issue	2nd Issue						
DATE	23-Oct-24	22-May-25						

PHOTO / ILLUSTRATION / DIAGRAM



LIGHT FITTING DESCRIPTION	Philips SlimBalance SP570 G3
ACCESSORIES	Mounting Bracket
ACCESSORIES	-

PHYSICAL CHARACTERISTICS

Cut Out (mm)	Diameter (mm)	Height (mm)	Length (mm)	Width (mm)	Finish	Reflector	Surface	IP Rating
-	-	78.6	1505	63.4	Signal Black RAL9004	Clear	✓	40

LUMINAIRE CHARACTERISTICS

POWER CONSUMPTION (W)	50	INPUT VOLTAGE	220 to 240V AC
LUMEN OUTPUT (lm)	5000	INTEGRATED / REMOTE	INTEGRATED
COLOUR TEMPERATURE (CCT)	3000-6500	CONTROL INTERFACE	DALI 209
CRI (Ra)	80	MAX RUN PER CONNECTION	-
BEAM ANGLE (°)	120	NOTES	- Installation methods submission required
SDCM (Steps)	3		
LED LIFETIME	L80 @0,000hrs (LM80)		

SUPPLIER INFORMATION

PRODUCT ORDER CODE	BCCK2-F12	MANUFACTURER	Philips
SUPPLIER COMPANY	Signify Malaysia Sdn Bhd	CONTACT	Justin Soon
MOBILE NUMBER	0111 1687 1681	EMAIL	justin.soon@signify.com

REMARK		PAGE
		11 of 11