
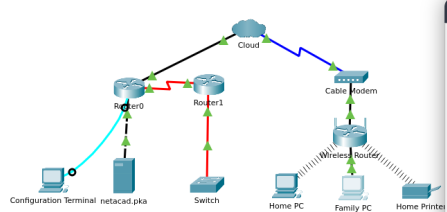


Modulo # 4 – Laboratorio # 1 : Conectar una red alámbrica a un inalámbrica.

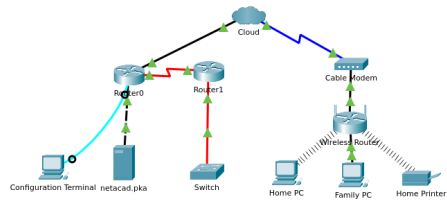

```
Family PC
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping netacad.pka
C:\>ping 19.0.0.254

Pinging 19.0.0.254 with 32 bytes of data:
Reply from 19.0.0.254: bytes=32 time=5ms TTL=126
Reply from 19.0.0.254: bytes=32 time=3ms TTL=126
Reply from 19.0.0.254: bytes=32 time=2ms TTL=126
Reply from 19.0.0.254: bytes=32 time=3ms TTL=126

Ping statistics for 19.0.0.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 5ms, Average = 3ms

C:\>ping 18.0.0.254

Pinging 18.0.0.254 with 32 bytes of data:
Reply from 18.0.0.254: bytes=32 time=1ms TTL=126
Reply from 18.0.0.254: bytes=32 time=1ms TTL=126
Reply from 18.0.0.254: bytes=32 time=12ms TTL=126
Reply from 18.0.0.254: bytes=32 time=1ms TTL=126

Ping statistics for 18.0.0.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 12ms, Average = 3ms

C:\>
```

