# ECE 6310 - Advanced Electromagnetic Fields: Homework Set #4

Miguel Gomez

2024-03-13

## Preliminaries

In this document, we use standard notation for electromagnetic theory. Key equations and concepts are summarized below:

### Vector Notation

- $\mathscr{E}$: Electric field intensity
- $\mathscr{H}$: Magnetic field intensity
- $\mathscr{D}$: Electric flux density
- $\mathscr{B}$: Magnetic flux density
- $\mathscr{J}$: Current density
- $\rho_v$: Volume charge density

### Differential Operators

- $\nabla\cdot$ : Divergence of a vector field
- $\nabla\times$ : Curl of a vector field
- $\nabla$ : Gradient of a scalar field
- $\partial_i$ : Partial derivative with respect to the independent basis element $i$

## Maxwell's Equations

In integral form, Maxwell's equations are given by:

$$\oint_{\partial V} \boldsymbol{\mathscr{E}} \cdot d\boldsymbol{\mathscr{l}} = -\frac{d}{dt} \int_V \boldsymbol{\mathscr{B}} \cdot d\boldsymbol{\mathscr{S}} \qquad \text{(Faraday's Law of Induction)} \qquad (1)$$

$$\oint_{\partial V} \boldsymbol{\mathscr{H}} \cdot d\boldsymbol{\mathscr{l}} = \int_V \boldsymbol{\mathscr{J}} \cdot d\boldsymbol{\mathscr{S}} + \frac{d}{dt} \int_V \boldsymbol{\mathscr{D}} \cdot d\boldsymbol{\mathscr{S}} \qquad \text{(Ampère's Circuital Law)} \qquad (2)$$

$$\oiint_{\partial V} \boldsymbol{\mathscr{D}} \cdot d\boldsymbol{\mathscr{S}} = \int_V \rho_v dV \qquad \text{(Gauss's Law for Electricity)} \qquad (3)$$

$$\oiint_{\partial V} \boldsymbol{\mathscr{B}} \cdot d\boldsymbol{\mathscr{S}} = 0 \qquad \text{(Gauss's Law for Magnetism)} \qquad (4)$$

## Other Relevant Equations

- Continuity Equation: $\nabla \cdot \boldsymbol{\mathscr{J}} + \partial_t \rho_v = 0$
- Relationship between $\boldsymbol{\mathscr{E}}$, $\boldsymbol{\mathscr{D}}$: $\boldsymbol{\mathscr{D}} = \epsilon \boldsymbol{\mathscr{E}}$
- Relationship between $\boldsymbol{\mathscr{H}}$, $\boldsymbol{\mathscr{B}}$: $\boldsymbol{\mathscr{B}} = \mu \boldsymbol{\mathscr{H}}$

## Boundary Conditions

Discuss the boundary conditions for $\boldsymbol{\mathscr{E}}$, $\boldsymbol{\mathscr{H}}$, $\boldsymbol{\mathscr{D}}$, and $\boldsymbol{\mathscr{B}}$ at interfaces between different media.

# 1 - 8.2

A standard X-band (8.2–12.4$GHz$) rectangular waveguide with inner dimensions of 0.9 in. (2.286 $cm$) by 0.4 in. (1.016 $cm$) is filled with lossless polystyrene ($\epsilon_r = 2.56$). For the lowest-order mode of the waveguide, determine at $10GHz$ the following values.

(a) Cutoff Freq ($f_c$) in $GHz$
We can find this with expression (8-16) from [1] with $a = 2.286$ $cm$.

$$
\begin{aligned}
(f_c)_{mn} &= \frac{1}{2\pi\sqrt{\mu\epsilon}}\sqrt{\left(\frac{m\pi}{a}\right)^2 + \left(\frac{n\pi}{b}\right)^2} \\
(f_c)_{10} &= \frac{1}{2\pi\sqrt{\mu\epsilon}}\sqrt{\left(\frac{1\pi}{a}\right)^2 + \left(\frac{0\pi}{b}\right)^2} \\
&= \frac{1}{2\pi\sqrt{\mu\epsilon}}\sqrt{\left(\frac{\pi}{a}\right)^2} \\
&= \frac{1}{2\pi\sqrt{\mu\epsilon}}\sqrt{\left(\frac{\pi}{2.86 * 10^{-2}}\right)^2} = 4.09832GHz
\end{aligned}
$$

(b) Guide wavelength ($\lambda_g$) in $cm$
This one can be done with a combination of expressions from chapter 8 in [1], (8-21a,b,c). we can do this with $a$ because the frequency in question is $10GHz$ which us above the cutoff found in part $a$.

$$
\begin{aligned}
(\lambda_g)_{mn} &= \frac{\lambda}{\sqrt{1 - \left(\frac{f_c}{f}\right)^2}} \\
&= \frac{\lambda}{\sqrt{1 - \left(\frac{4.09832e^9}{1e^{10}}\right)^2}} \\
&= \frac{0.0187375}{\sqrt{1 - (.409832)^2}} \\
&= 0.0205419\ [m] = 2.05419\ [cm]
\end{aligned}
$$

(c) Wave impedance ($\eta$)
This can be found with (8-20a) in [1].

$$Z_w^+ = \frac{\sqrt{\frac{\mu}{\epsilon}}}{\sqrt{1-\left(\frac{f_c}{f}\right)^2}} = \frac{\eta}{\sqrt{1-\left(\frac{f_c}{f}\right)^2}}$$

$$Z_w^+ = \frac{\sqrt{\frac{\mu_0}{\epsilon_0 \epsilon_r}}}{\sqrt{1-(.409832)^2}}$$

$$\eta_0 = 120\pi$$

$$= \frac{\frac{\eta_0}{\sqrt{\epsilon_r}}}{\sqrt{1-(.409832)^2}} = \frac{120\pi}{\sqrt{2.56}\cdot 0.912161}$$

$$= 258.309\ \Omega$$

(d) Phase velocity ($v_p$) in $\frac{m}{s}$

(e) Group velocity in $\frac{m}{s}$
This velocity, as well as the group velocity, can be found using expression (8.49a-c) from [1]. These reduce to a simple expression in (8-52)

$$v_p = \frac{v}{\cos(\Psi)}$$

$$v_g = v\cos(\Psi)$$

$$\Psi = \cos^{-1}\left(\sqrt{1-\left(\frac{f_c}{f}\right)^2}\right)$$

Since inverse cos returns an angle, taking the cos of the inverse is the argument to the inverse itself.

$$v_p = \frac{v}{\sqrt{1-\left(\frac{f_c}{f}\right)^2}}$$

$$v_g = v\sqrt{1-\left(\frac{f_c}{f}\right)^2}$$

Since $v$ is the expression $\frac{c}{\sqrt{\epsilon_r}}$, we can input those into the expression and solve for the speeds.

$$v_p = \frac{c}{\sqrt{\epsilon_r}\sqrt{1-\left(\frac{f_c}{f}\right)^2}} = 2.05419 * 10^8\left[\frac{m}{s}\right]$$

$$v_g = \frac{c}{\sqrt{\epsilon_r}}\sqrt{1-\left(\frac{f_c}{f}\right)^2} = 1.70916 * 10^8\left[\frac{m}{s}\right]$$

As for verifications here, I plotted 4 modes in 1 and 2 and showed that the solution we came up with must apply to the first mode, as expected since we used $T_{mn} = T_{10}$. Since all other values are derived from this first calulation, we can call this verified.

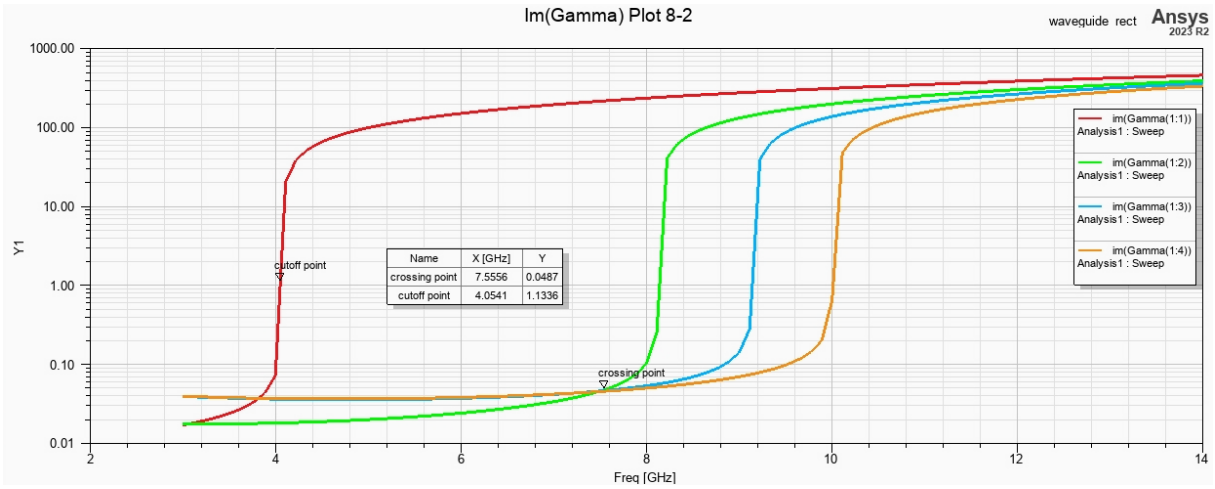


Figure 1: imaginary gamma plot 8-2

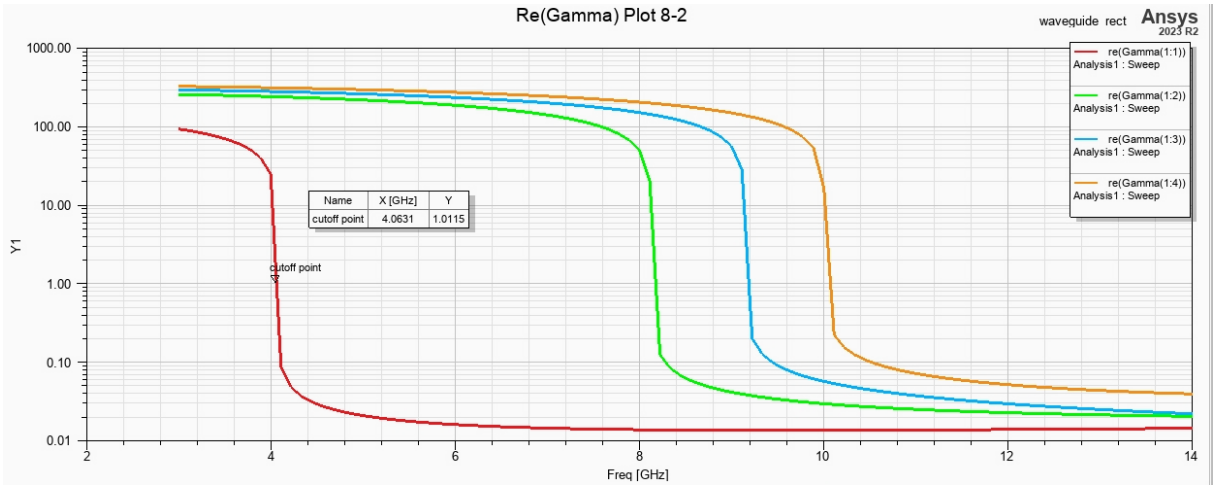


Figure 2: real gamma plot 8-2

Here is a view of the simulation design in 3. File for remaking project(aedt file) will also be included with the submission:

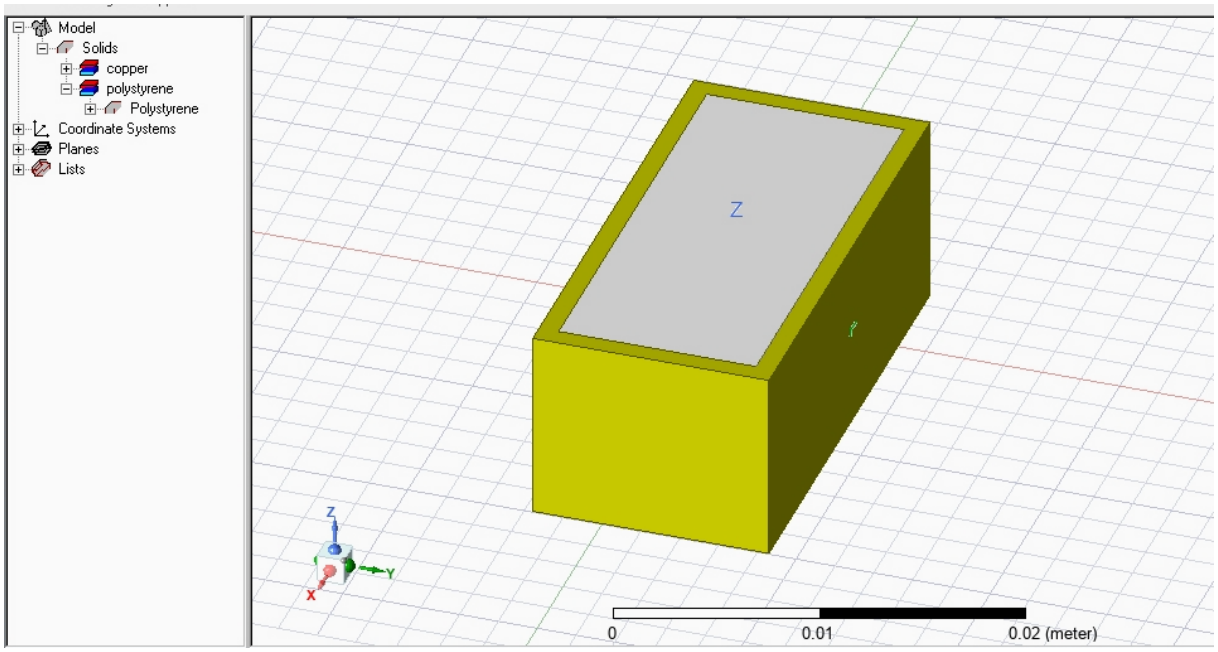


Figure 3: 3DModel in Ansys

# 2 - 9.14

A circular waveguide with radius of $3cm$ is made of copper ($\sigma = 5.76107\frac{S}{m}$). For the dominant $TE_{11}$ and low-loss $TE_{01}$ modes, determine their corresponding cut-off frequencies and attenuation constants (in $\frac{Np}{m}$ and $\frac{dB}{m}$ at a frequency of $7GHz$. Assume that the waveguide is filled with air.

This problem can be modeled using CST, or Ansys, and we can also solve for the values directly. Using the expression for the cutoff frequency seen in 9-12a of [1], we can solve for $f_c$, and using expression 9-34a in [1], we can solve for the attenuation constant for our modes. $\chi'_{mn}$ depends on the mode and can be found with table 9-1 of [1].

$$f_c = \frac{\chi'_{mn}}{2\pi a\sqrt{\mu\epsilon}}$$

$$\alpha_{mn} = \frac{R_s}{a\eta\sqrt{1-\left(\frac{f_c}{f}\right)^2}}\left[\left(\frac{f_c}{f}\right)^2 + \frac{m^2}{\chi'^2_{mn} - m^2}\right]$$

$TE_{11}$ : $\chi'_{11} = 1.8412$

a) $f_c$

b) $\alpha_c$

$TE_{01}$ : $\chi'_{01} = 3.8318$

a) $f_c$

b) $\alpha_c$

# 3 - 11.2

A magnetic line source of infinite length and constant magnetic current Im is placed parallel to the z axis at a height h above a PEC ground plane of infinite extent, as shown in Figure 11-2 except that we now have a magnetic line source.

(a) Determine the total magnetic field at $\rho$, $\phi$ for $0 \leq \phi \leq 180°$.

(b) Simplify the expressions when the observations are made at very large distances (far field).

(c) Determine the smallest height $h$ (in $\lambda$) that will introduce a null in the far field amplitude pattern at:

- $\phi = 30°$
- $\phi = 90°$

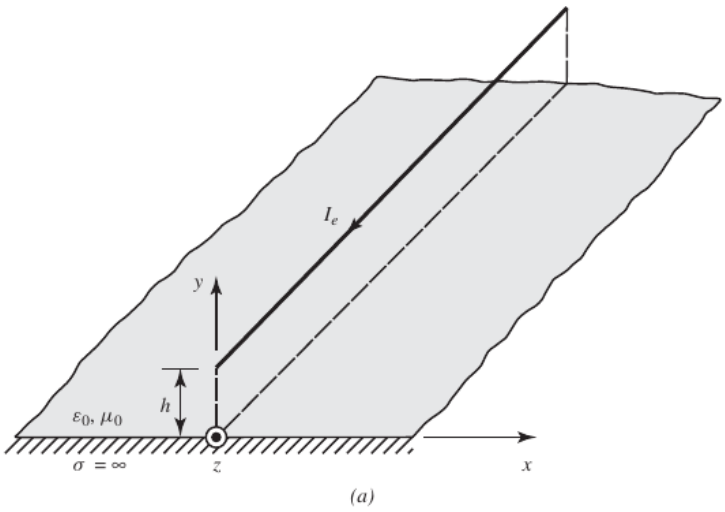


Figure 4: fig. 11-2

# 4 - 11.20

For a strip of width $w = 2\lambda$, plot the $\frac{RCS}{\lambda_o^2}$ (in dB) when the length of the strip is $l = 5\lambda$, $10\lambda$ and $20\lambda$ (plot all three graphs on the same figure). Use the approximate relation between the 2D SW and the 3D RCS. Assume normal incidence.
Attempting to solve these was a bit of a challenge in Ansys. I was having issues with getting the answers due to an error that kept crashing the machines. It was the following:

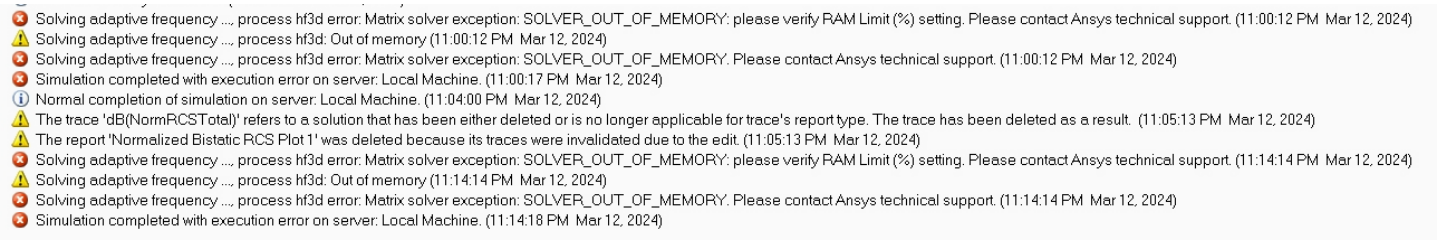


Figure 5: error seen

Because of this, the plot for the $20\lambda$ plot did not work out. It kept failing no matter the changes I made to the bounding box. In order for the plots to be generated for these, I had to change the number of points quite a bit. I usually prefer to leave these with a min resolution of $1\circ$ but it was not possible in this case. instead, here is a plot that includes $7.5\lambda$ in 6.

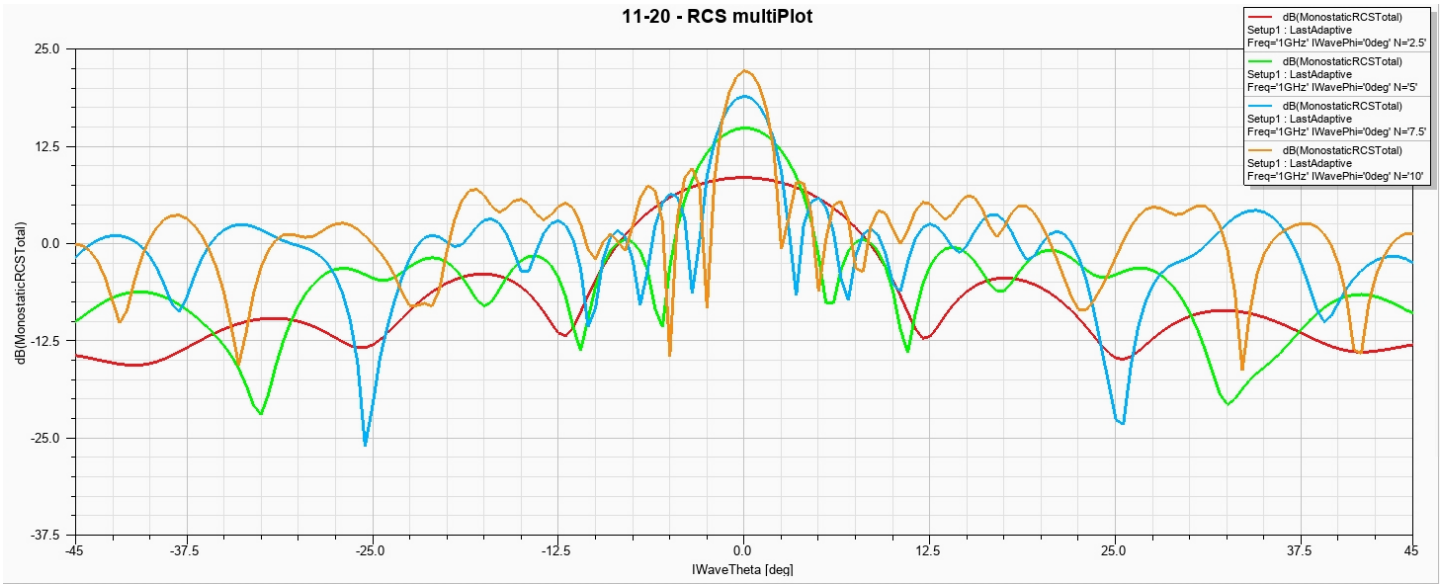


Figure 6: plots for various runs without $20\lambda$

# References

[1] Constantine A. Balanis. *advanced engineering electromagnetics*, chapter 1, page 2–3. John Wiley & Sons, 2024.