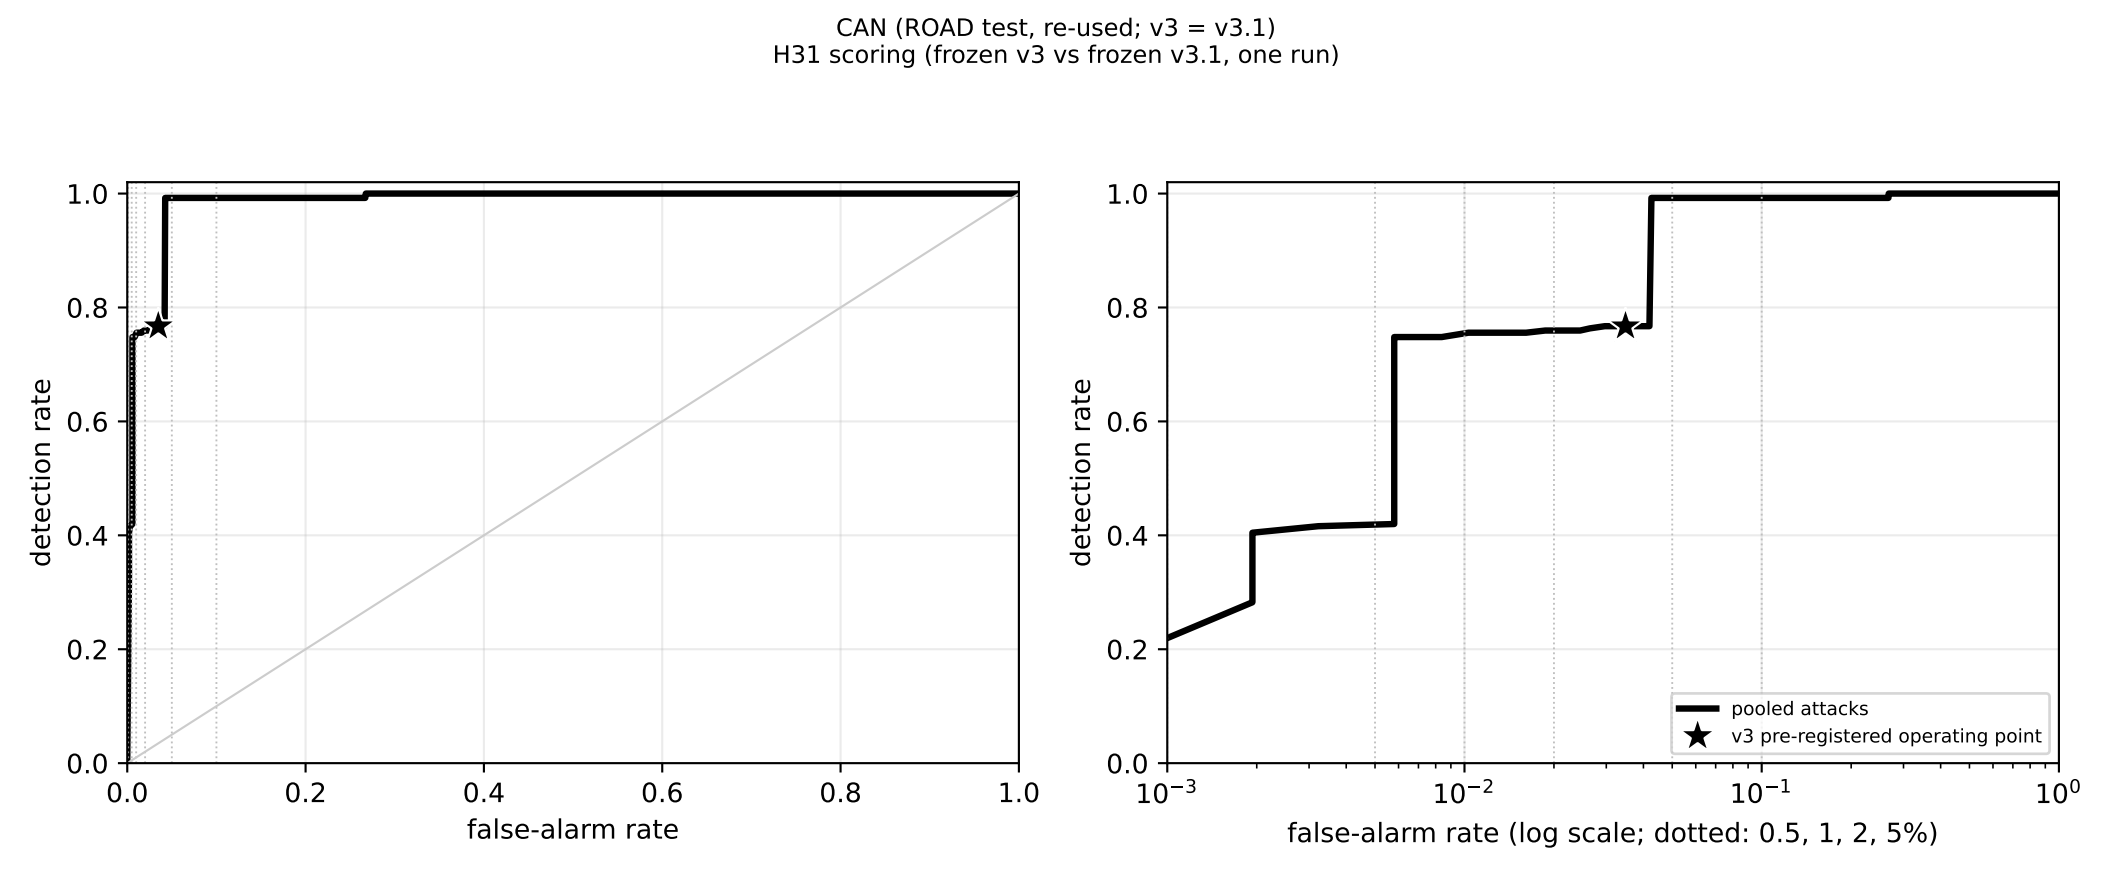
CAN (ROAD test, re-used; v3 = v3.1)
H31 scoring (frozen v3 vs frozen v3.1, one run)
detection rate
false-alarm rate
0.0
0.2
0.4
0.6
0.8
1.0
detection rate
false-alarm rate (log scale; dotted: 0.5, 1, 2, 5%)
10^{-3}
10^{-2}
10^{-1}
10^{0}
pooled attacks
v3 pre-registered operating point