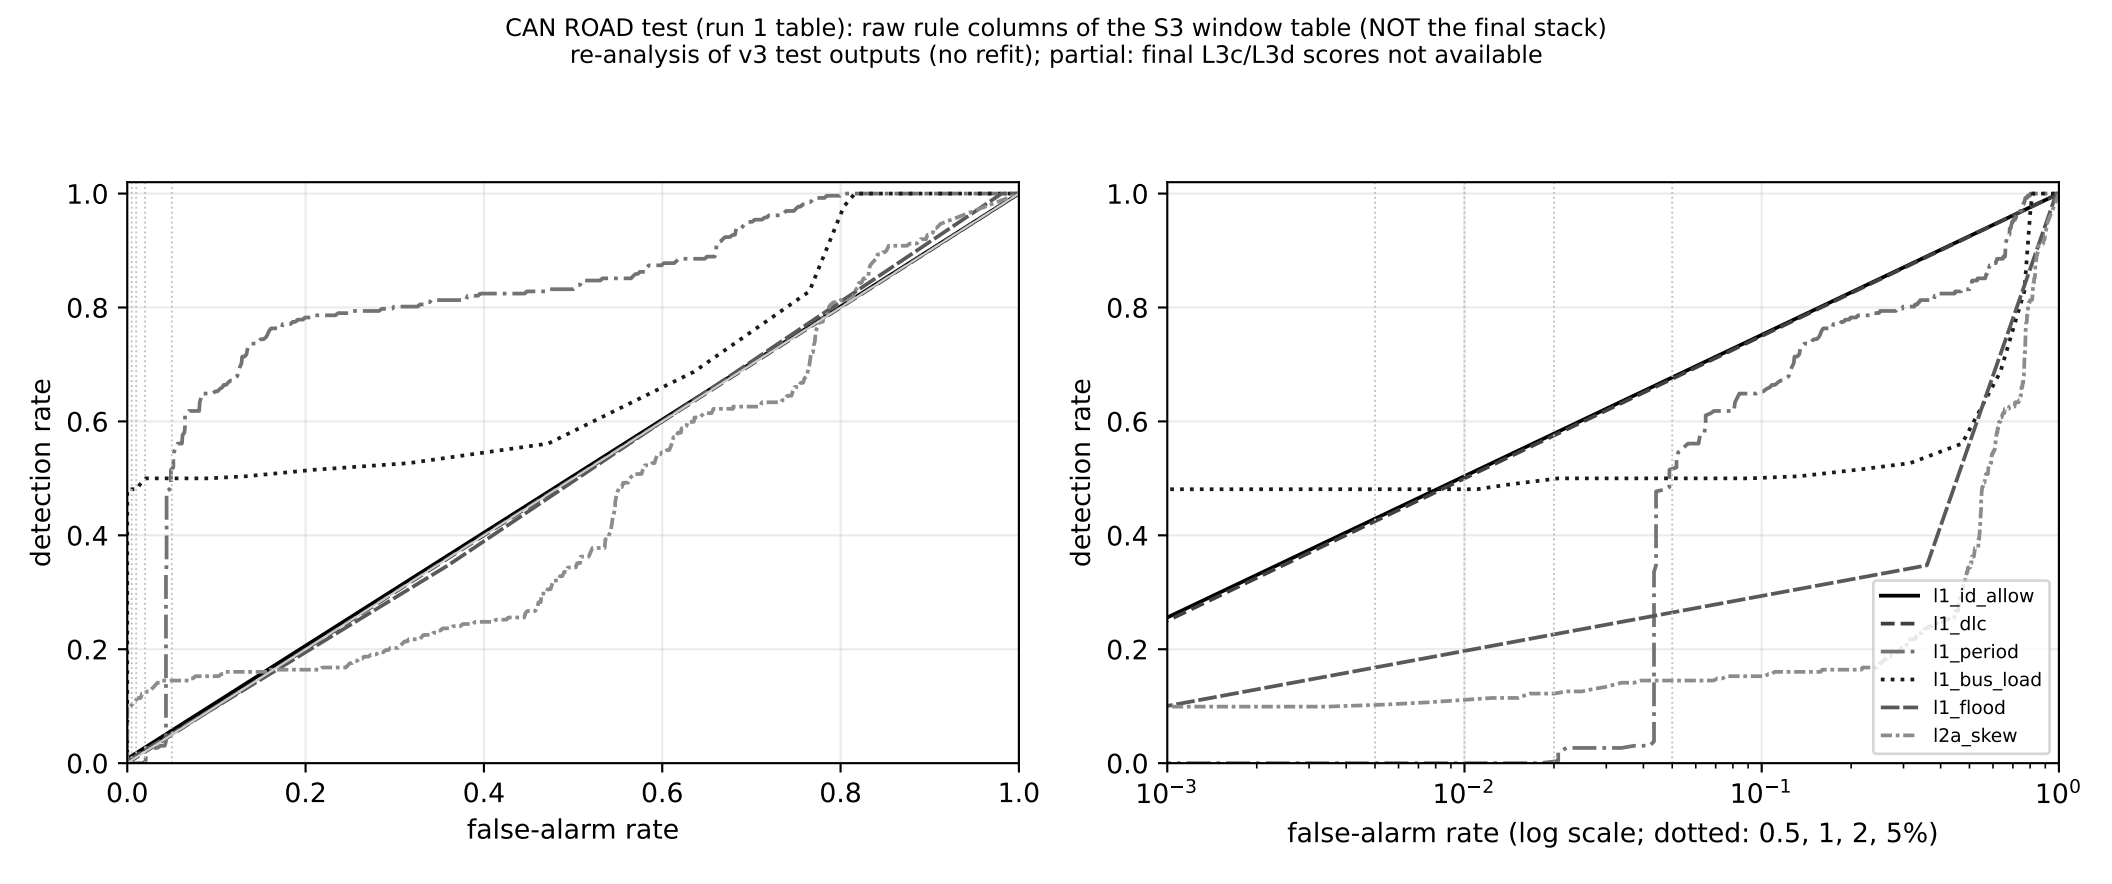
CAN ROAD test (run 1 table): raw rule columns of the S3 window table (NOT the final stack)
re-analysis of v3 test outputs (no refit); partial: final L3c/L3d scores not available
detection rate
false-alarm rate
false-alarm rate (log scale; dotted: 0.5, 1, 2, 5%)
l1_id_allow
l1_dlc
l1_period
l1_bus_load
l1_flood
l2a_skew