

Server0

Physical Config **Services** Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS**
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

DNS

DNS Service ☐ On ☒ Off



Resource Records

Name Type **A Record**

Address

Add **Save** **Remove**

No.	Name	Type	Detail
0	myserver.ru	A Record	192.168.2.101

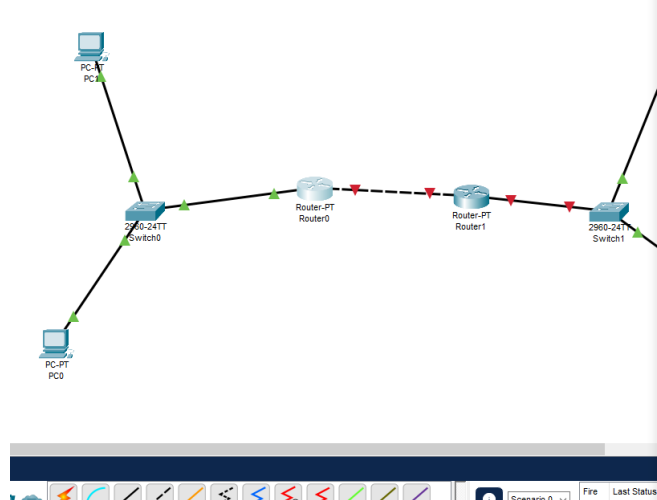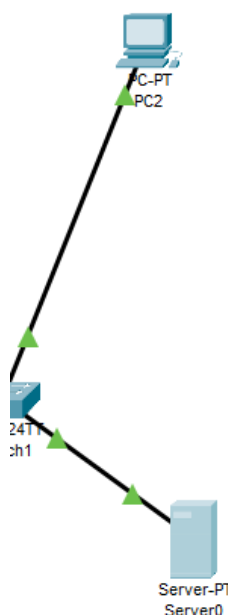

Router0

Physical Config **CLI** Attributes

IOS Command Line Interface


```
Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp excluded-address 192.168.1.100
Router(config)#ip dhcp excluded-address 192.168.1.100
Router(config)#ip dhcp excluded-address 192.168.1.100
Router(config)#ip dhcp pool net1
Router(dhcp-config)#net 192.168.1.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.1.100
Router(dhcp-config)#dns-server 192.168.2.101
Router(dhcp-config)#int fa0/0
Router(config-if)#ip address 192.168.1.100 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
int fa1/0
Router(config-if)#ip address 192.168.3.1 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
no ip
Router(config-router)#net 192.168.1.0
Router(config-router)#net 192.168.3.0
```

Copy Paste



Router-PT Router2

Router2

Physical Config CLI Attributes

IOS Command Line Interface

```

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip dhcp excluded-address 192.168.2.100 192.168.2.101
Router(config)#ip dhcp pool net2
Router(dhcp-config)#net 192.168.2.0 255.255.255.0
Router(dhcp-config)#default-router 192.168.2.100
Router(dhcp-config)#dns-server 192.168.2.101
Router(dhcp-config)#int fa0/0
Router(config-if)#ip ad 192.168.2.100 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#int fal/0
Router(config-if)#ip ad 192.168.3.2 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up


Router(config-if)#ro rip
Router(config-router)#net 192.168.2.0
Router(config-router)#192.168.3.0
^
% Invalid input detected at '^' marker.

Router(config-router)#net 192.168.3.0
Router(config-router)#

```

Copy Paste

☐ Top

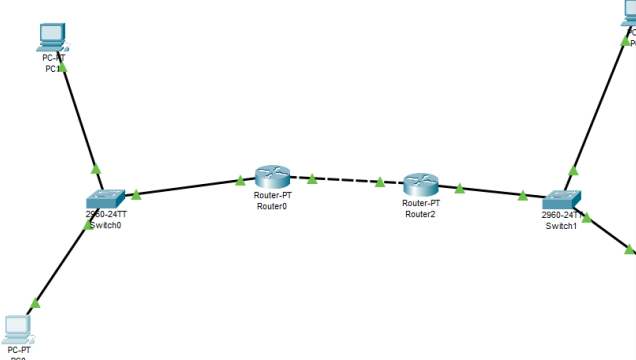

PC0-PT PC0

2960-24TT Switch0

Router-PT Router0

Router-PT Router2

Router-PT Router1

2960-24TT Switch1

PC2-PT PC2

Physical Config Desktop Programming Attributes

Command Prompt

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.1: bytes=32 time=10ms TTL=126
Reply from 192.168.2.1: bytes=32 time<1ms TTL=126
Reply from 192.168.2.1: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 3ms

C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Reply from 192.168.2.1: bytes=32 time=11ms TTL=126
Reply from 192.168.2.1: bytes=32 time<1ms TTL=126
Reply from 192.168.2.1: bytes=32 time<1ms TTL=126
Reply from 192.168.2.1: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 2ms

C:\>

```

