
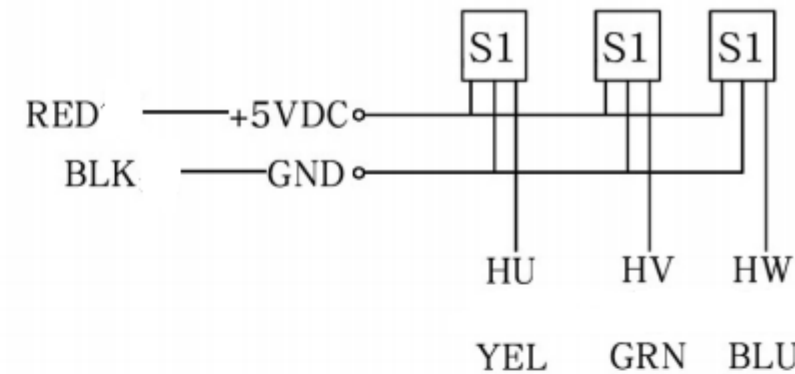
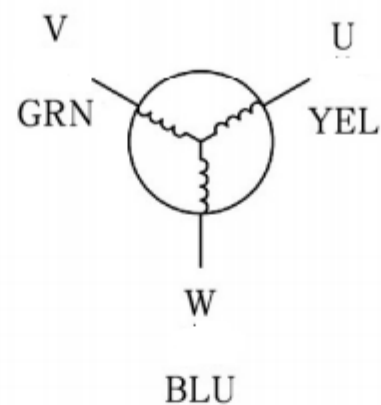


Item	Specifications
Winding type	Star/Delta
Hall effect angle	120°
Shaft runout	0.025mm
Radial play	0.02mm/450g
End play	0.08mm/450g
Max radial force	法兰方向/115N/20mm from the flange
Max axial force	45N
Insulation class	Class B
IP class	IP 40
Dielectric strength	500VDC for one minute
Insulation resistance	100M Ω min 500VDC

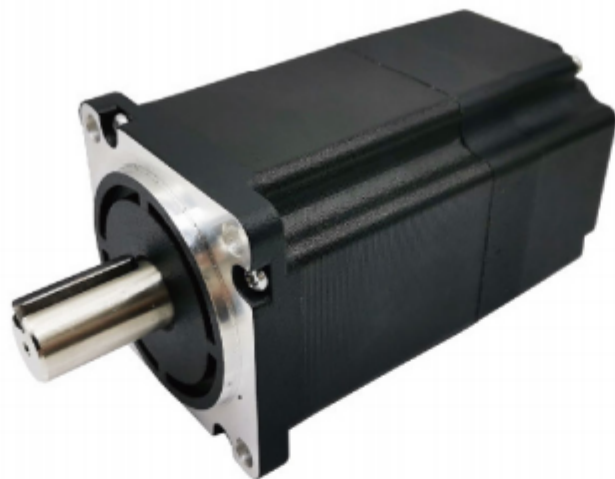

(Electrical Specifications)

Modle No.	(VDC) Rated Voltage	(A) Rated Current	(W) Rated Power	(N.m) Rated Torque	(N.m) Peak Torque	(rpm) Rated Speed	(mm) Length	(KG) Mass
60BL80-230	24	4.3	78	0.25	0.75	3000	78	0.85
60BL100-230	24	8.7	157	0.5	1.5	3000	99	1.25
60BL120-230	24	13	235	0.75	2.25	3000	120	1.7
60BL80-440	48	2.9	105	0.25	0.75	4000	78	0.85
60BL100-440	48	5.8	209	0.5	1.5	4000	99	1.25
60BL120-440	48	8.7	314	0.75	2.25	4000	120	1.7

Above only for representative products,products of special request can be made according to the customer request.


(Electric Connection)

Lead NO.	Lead Color	Lead Gauge	Function	Description
1	Red	UL3266/24AWG	VCC+5VDC	SUPPLY VOL AGE HALL SENSORS
2	Black		GND	GROUND FOR HALL SENSORS
3	Yellow		HALL A	SIGNAL OF HALL A
4	Green		HALL B	SIGNAL OF HALL B
5	Blue		HALL C	SIGNAL OF HALL C
1	Yellow	UL3266/18AWG	PHASE U	MOTOR PHASE U
2	Green		PHASE V	MOTOR PHASE V
3	Blue		PHASE W	MOTOR PHASE W



(Dimensions)

Unit=mm)

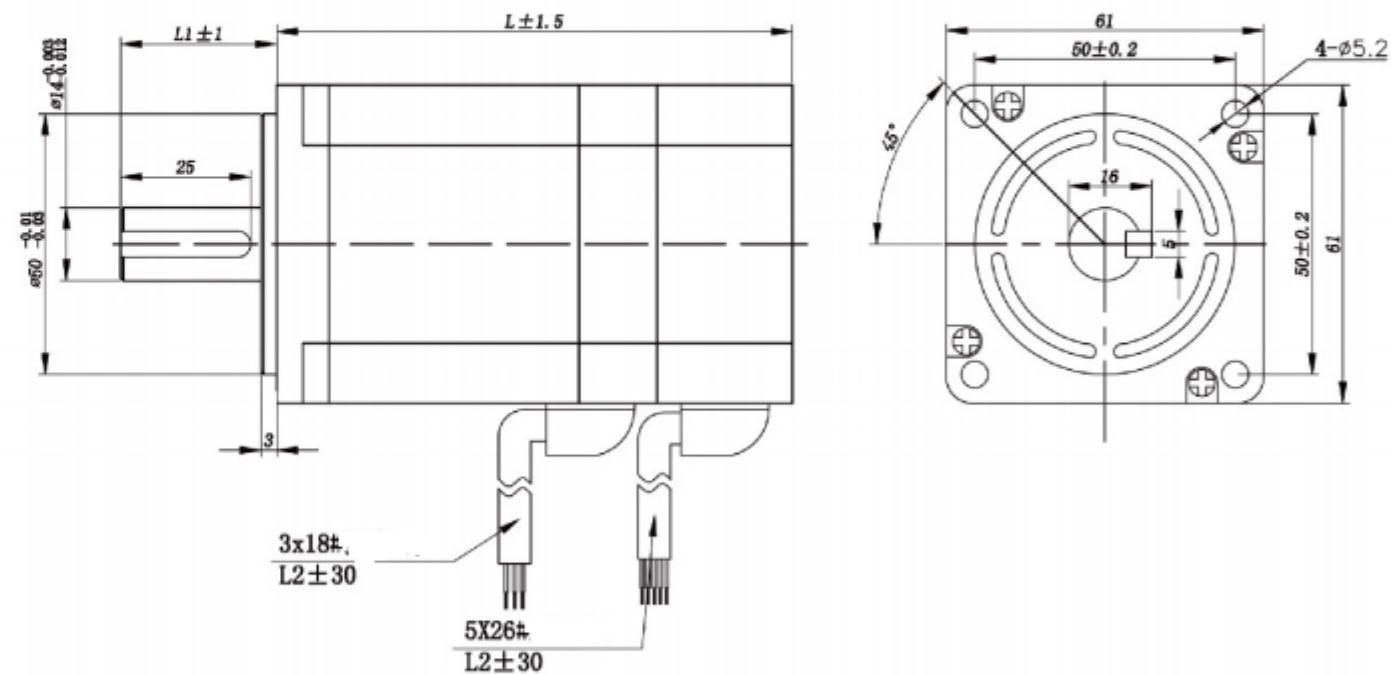

L/L1/L21

L/ L1/L2can be customized according to customer' s requirements