


drylin W-Econ single rail WS-CA

WS-20-CA

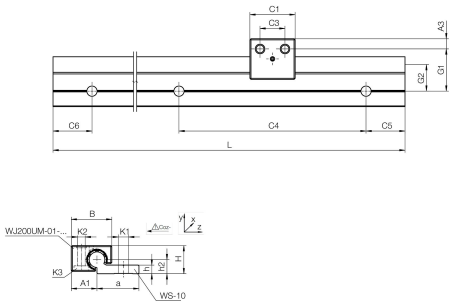

drylin W-Econ single rail WS-CA

- Suitable for all drylin W single bearing housings and linear carriages
- Lifelong rattle-free due to combination with pre-loaded drylin W linear bearings series WJ200UM-01-Pxx
- Individual bearing clearance adjustment by using WJ200UME-01 bearing housings

k1 thread	M8
h1	4.5 mm
h2	20 mm
A1	30 mm
a	27 mm
h	9.5 mm
H	36 mm
C4	120 mm
G1	38 mm
G2	21 mm

Product description

Introducing the drylin® W-Econ single rail WS-CA, designed for seamless compatibility with all drylin® W single bearing housings and linear carriages. Enjoy a lifelong rattle-free experience thanks to its innovative design, which pairs perfectly with pre-loaded drylin® W linear bearings. Plus, you can customize your bearing clearance effortlessly with WJ200UME-01 bearing housings. Elevate your linear motion solutions with this reliable and versatile rail from the trusted drylin® family.

Manufacturing and installation tolerances

H-tolerance	±0,25 mm
da-tolerance	-0,1 mm

Mechanical properties

Geometrical moment of inertia Iy [mm4]	57100
Geometrical moment of inertia Iz [mm4]	36000
Moment of resistance Wby [mm3]	2700
Moment of resistance Wbz [mm3]	1,900
max. length	4000 mm



General properties

size	20
Rail profile	round
Design	Single Rail

Dimensions

H	36 mm
da	20 mm
a	27 mm
h	9.5 mm
h1	4.5 mm
h2	20 mm
G1	38 mm
G2	21 mm
A1	30 mm
Q1	37 mm
Q2	37 mm
C4	120 mm
C5/C6 (min.)	20 mm
C5/C6 (max.)	79.5 mm
k1 thread	M8
Weight	1410 g

Certificates and standards

