tag36h11 ID 0 - 90 mm printed, on a 100 mm carrier

Nominal detection edge (tagsize): 72 mm, the outer edge of the black square. Measure yours with calipers.

Cut on the grey square. The black ticks mark the carrier’s centre lines; keep the white margin clean.

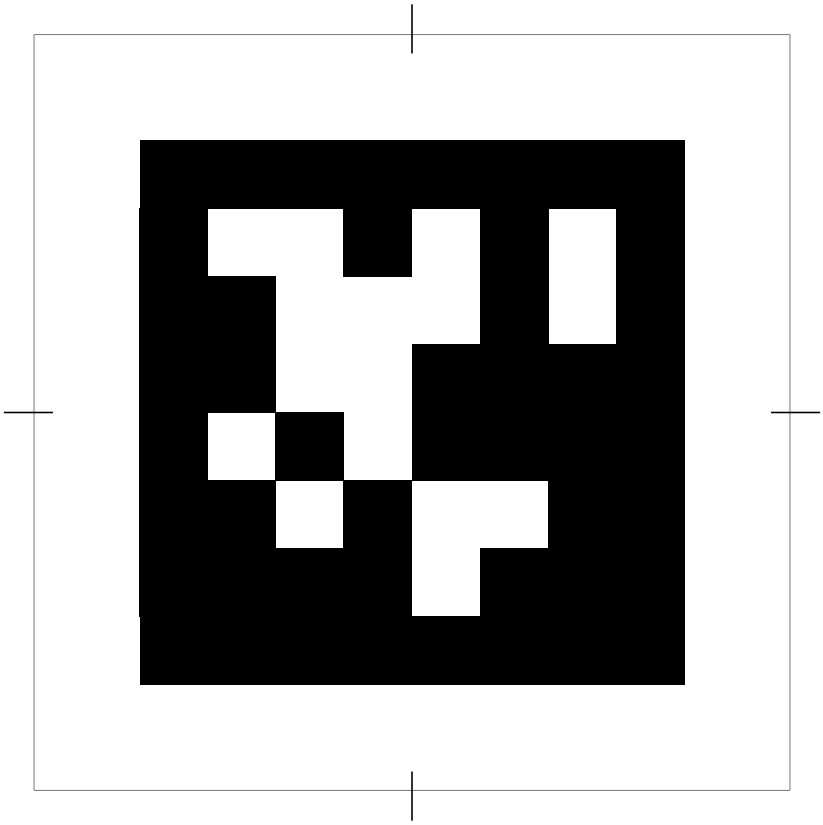



Scale check: this line must measure exactly 100 mm. If not, reprint at 100% with fit-to-page off.

hpc-vbt-live, probes/bar-end-tag. Tag pattern from AprilRobotics/apriltag-imgs (BSD-2-Clause).

tagStandard41h12 ID 0 - 90 mm printed, on a 100 mm carrier

Nominal detection edge (tagsize): 50 mm, the inner edge of the black ring. Measure yours with calipers.

Cut on the grey square. The black ticks mark the carrier’s centre lines; keep the white margin clean.

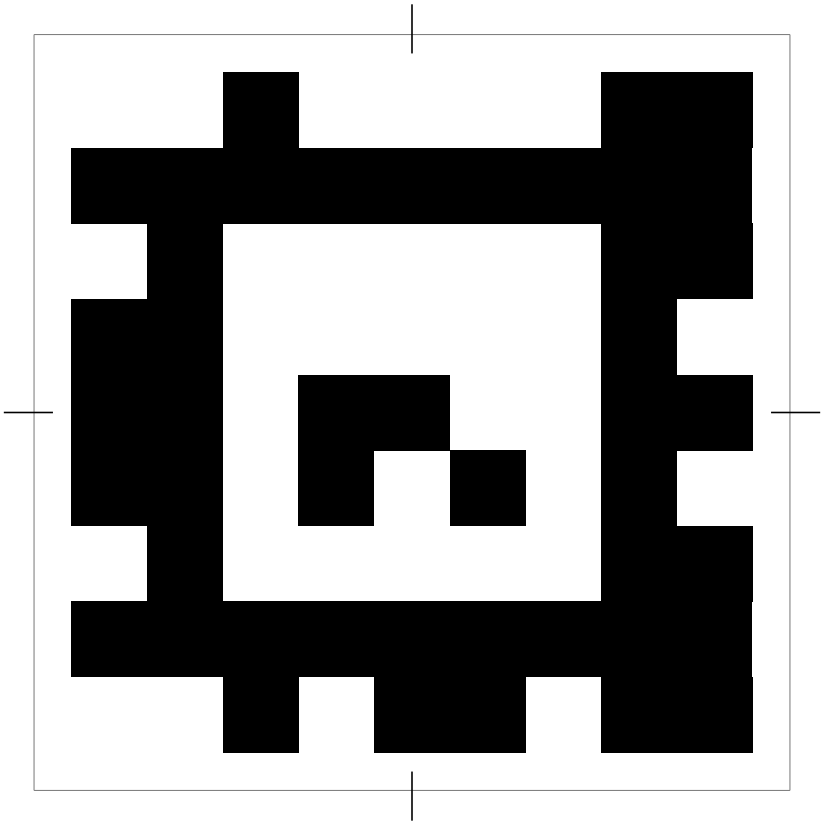



Scale check: this line must measure exactly 100 mm. If not, reprint at 100% with fit-to-page off.

hpc-vbt-live, probes/bar-end-tag. Tag pattern from AprilRobotics/apriltag-imgs (BSD-2-Clause).

Fallback: tag36h11 ID 0 at 35 mm printed (28 mm detection edge)

Stays inside a 50 mm sleeve end. Cut on the grey circle; two copies.

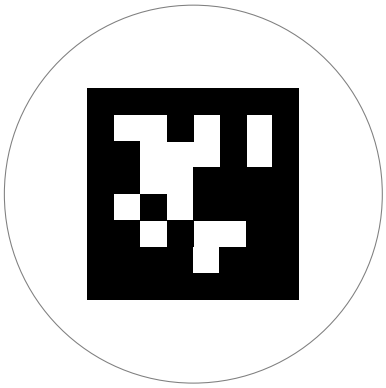

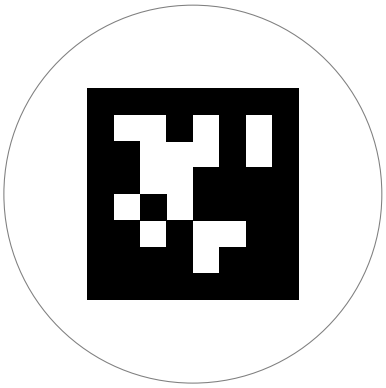

Scale check: this line must measure exactly 100 mm. If not, reprint at 100% with fit-to-page off.