





Было впаяно 100 Ом, 56 к


560k

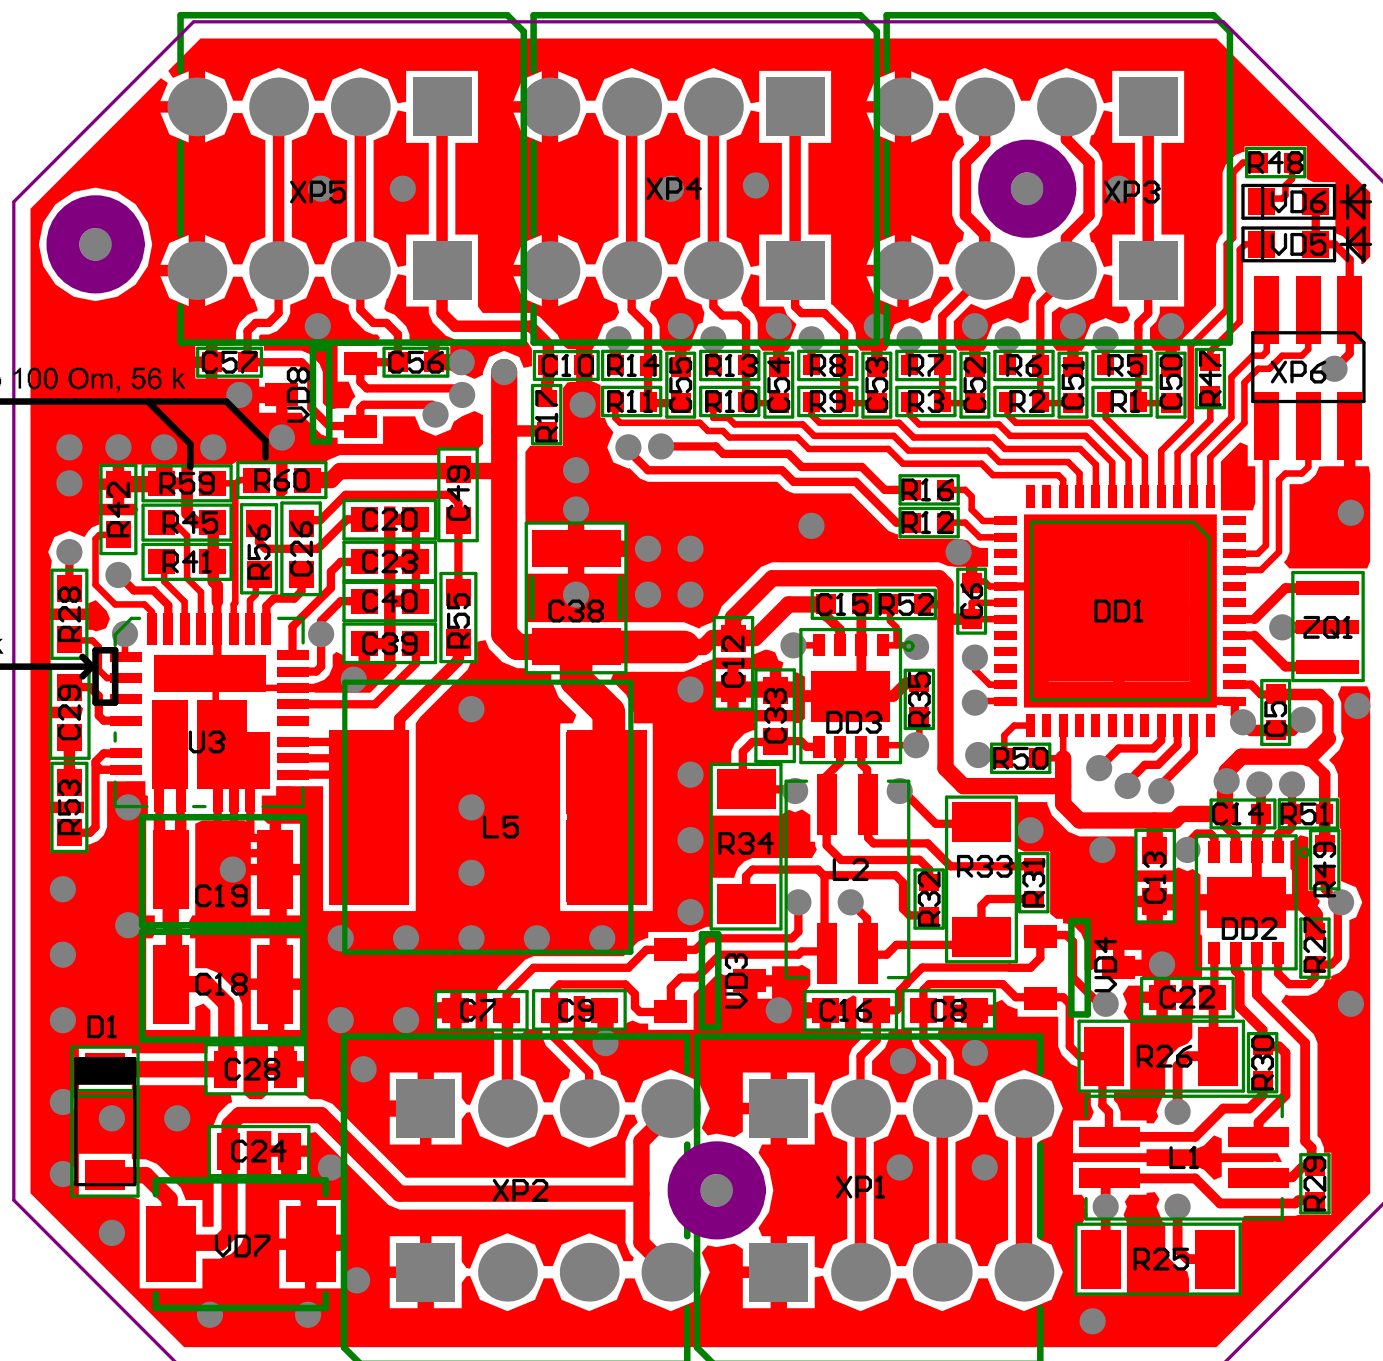


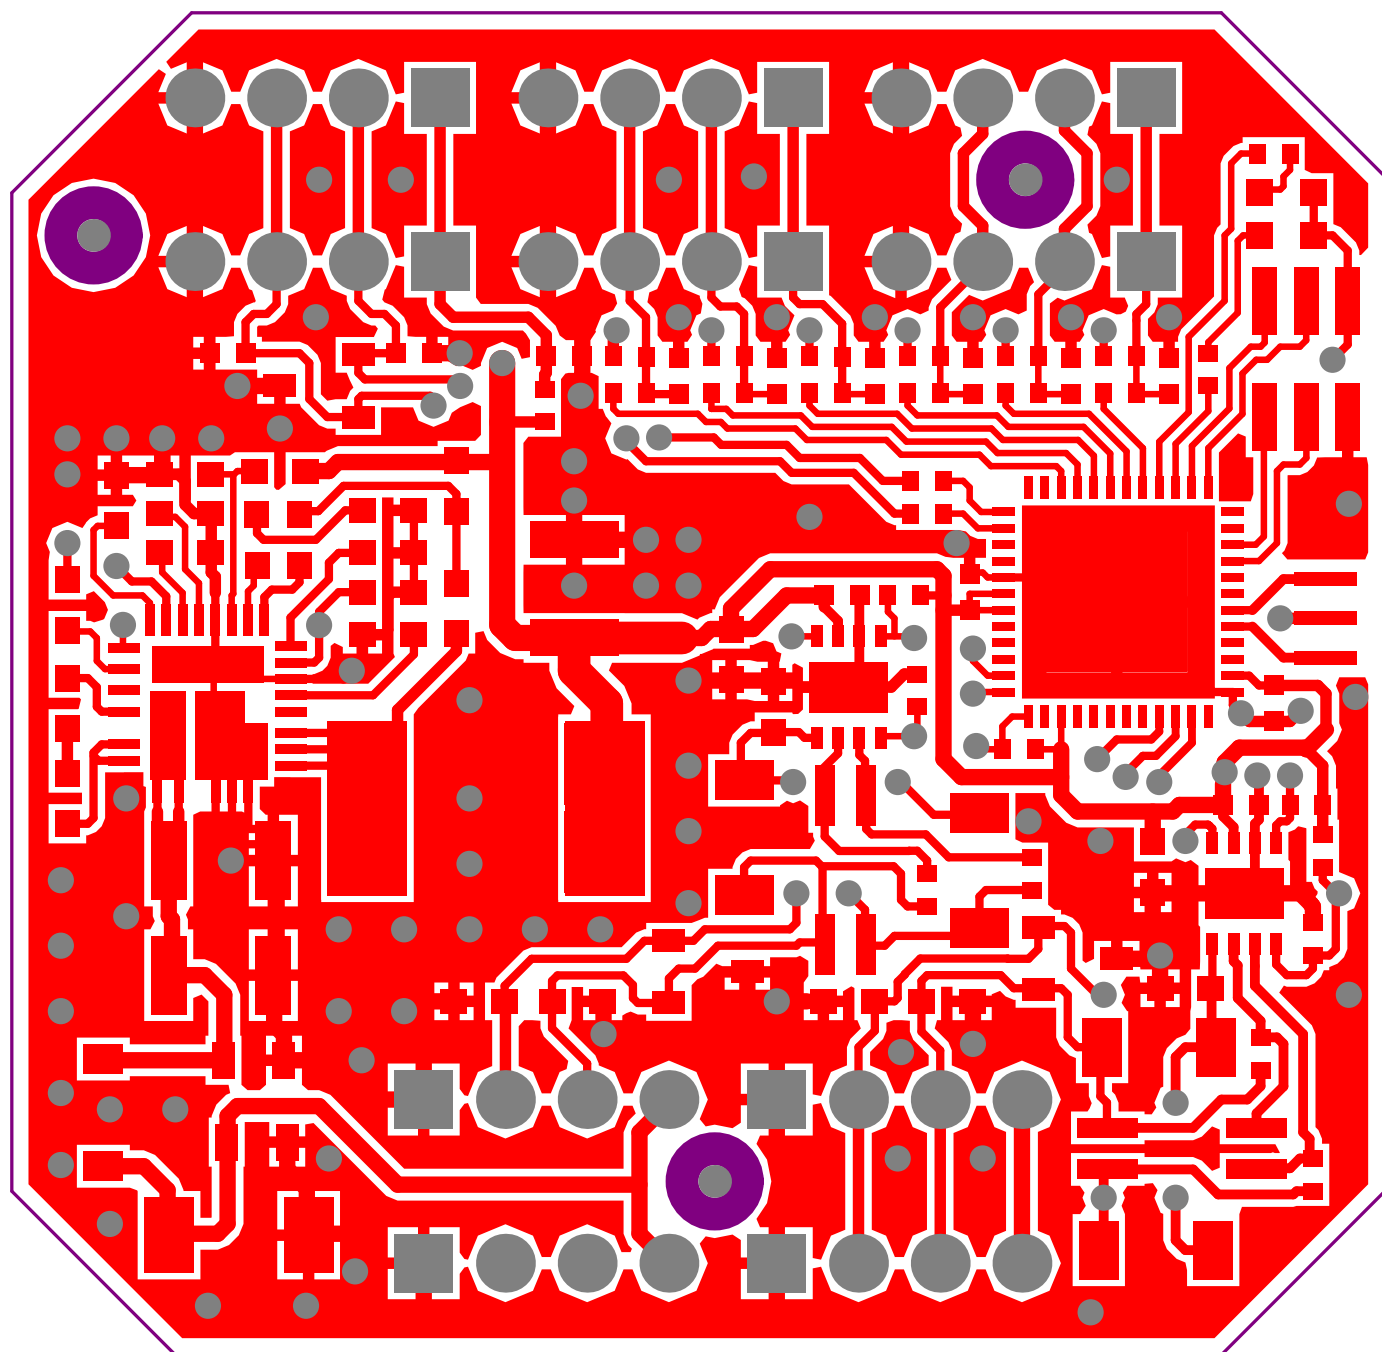


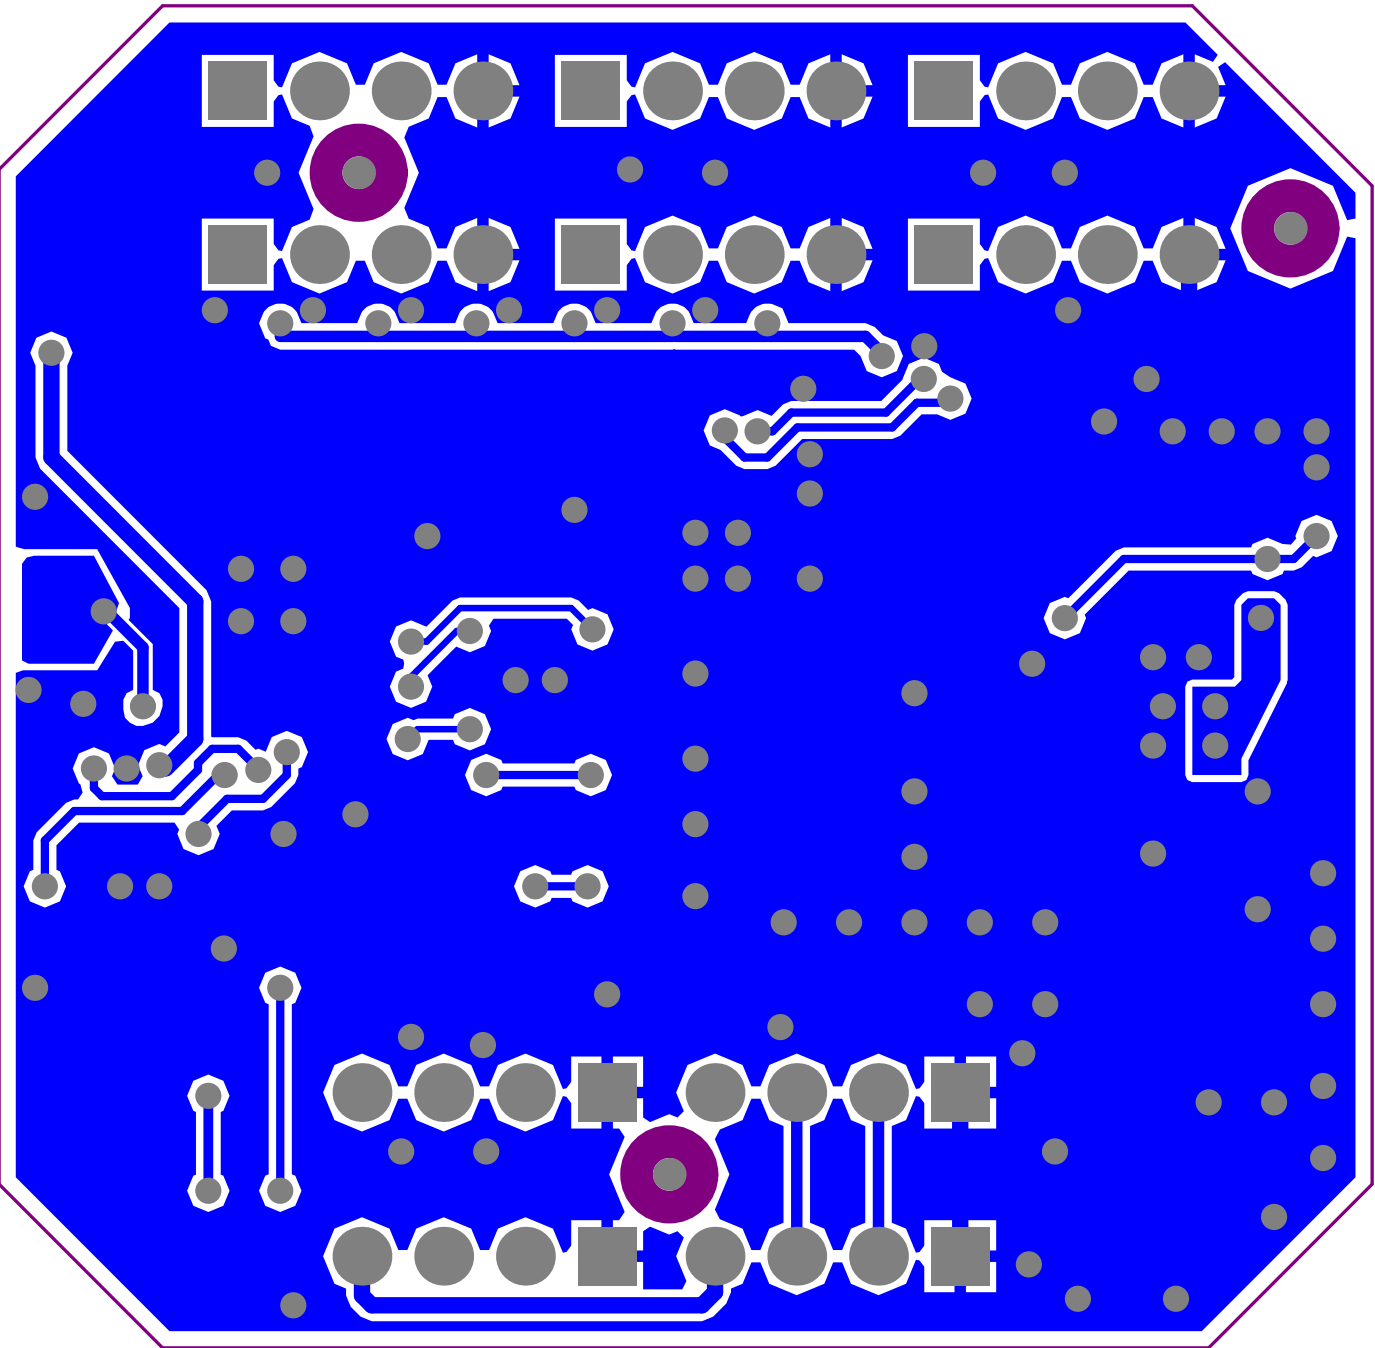


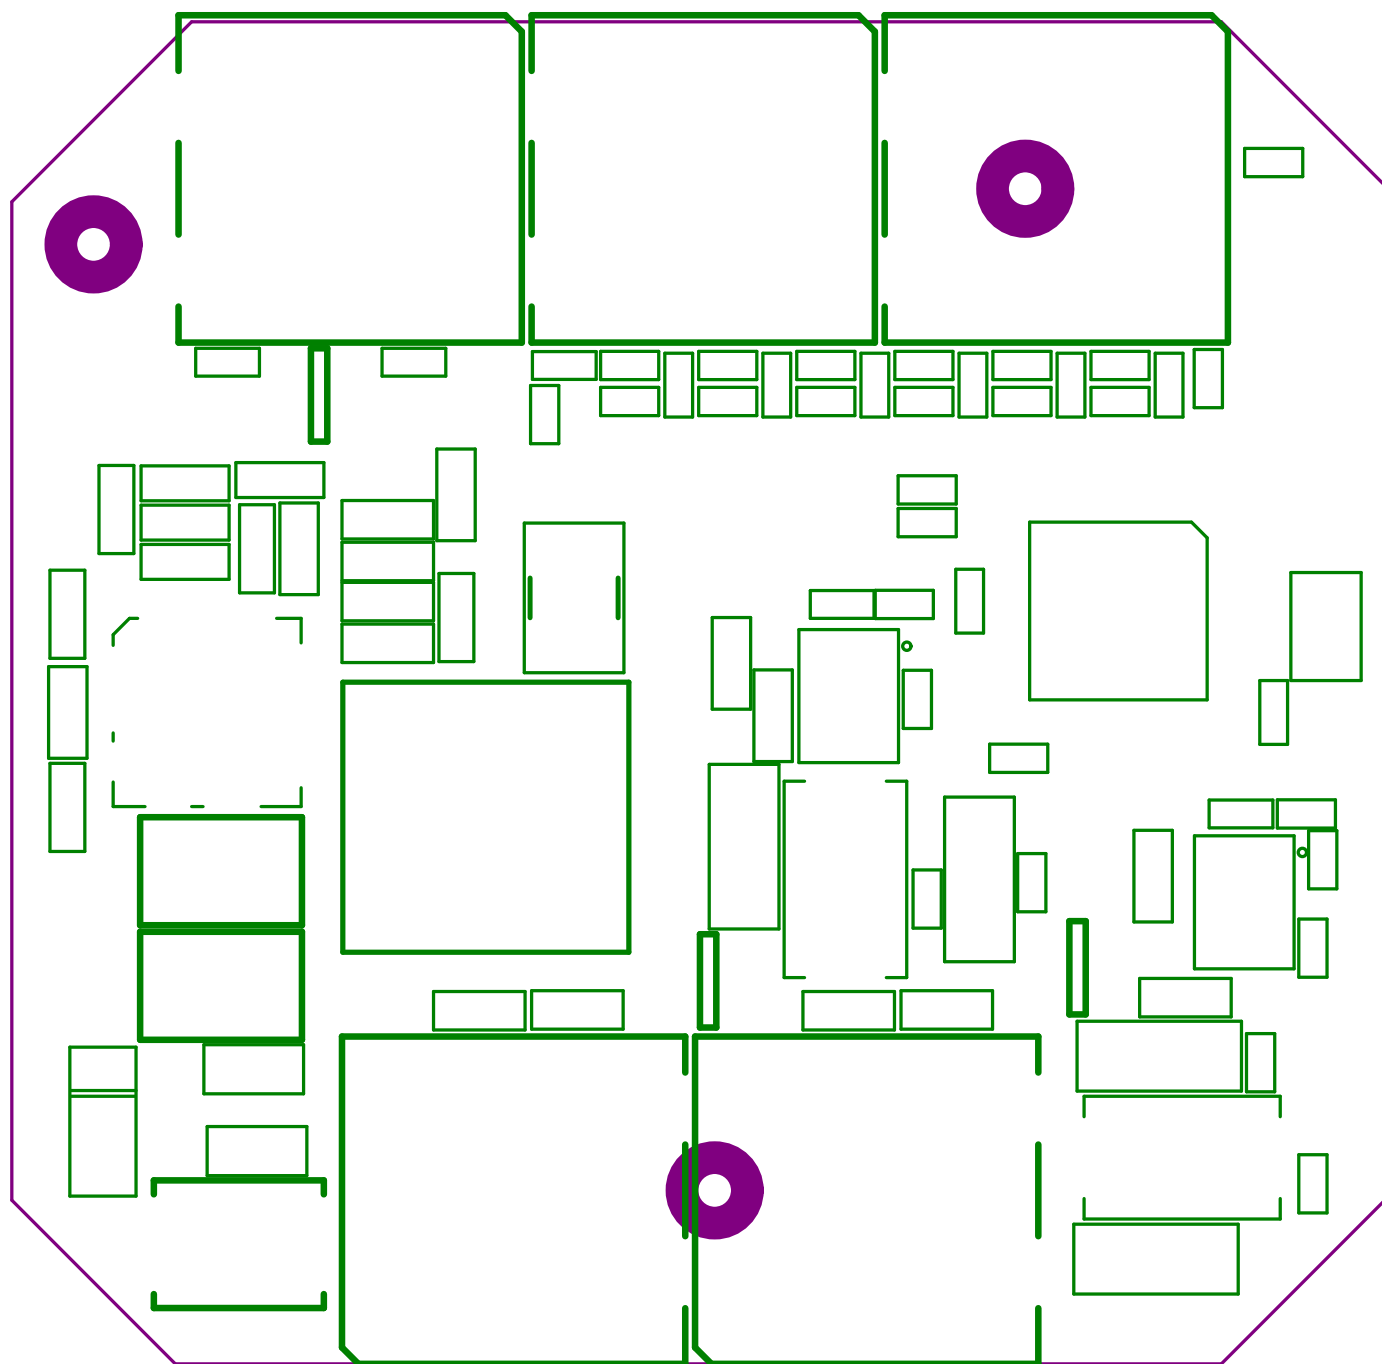

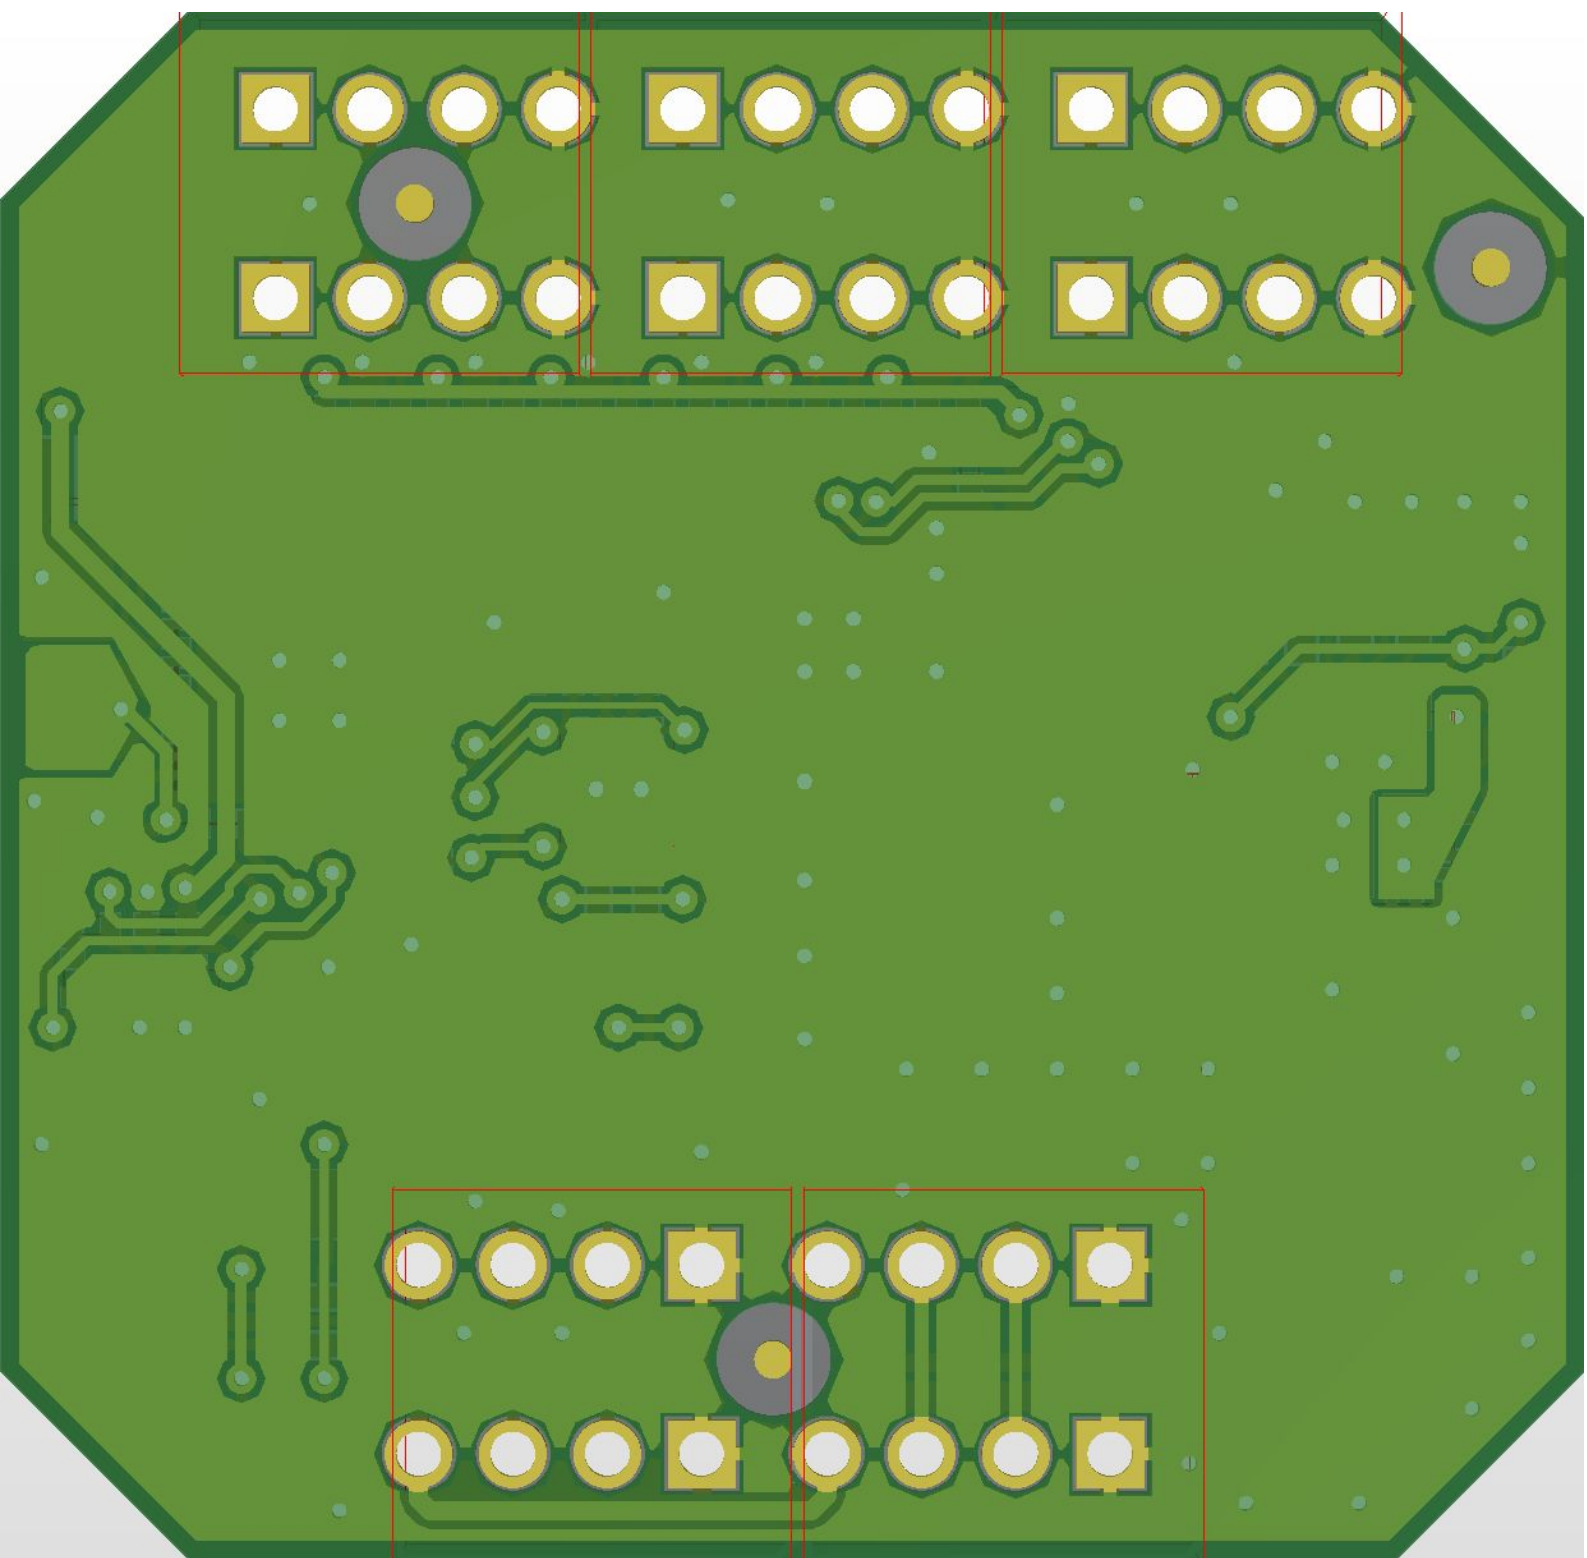

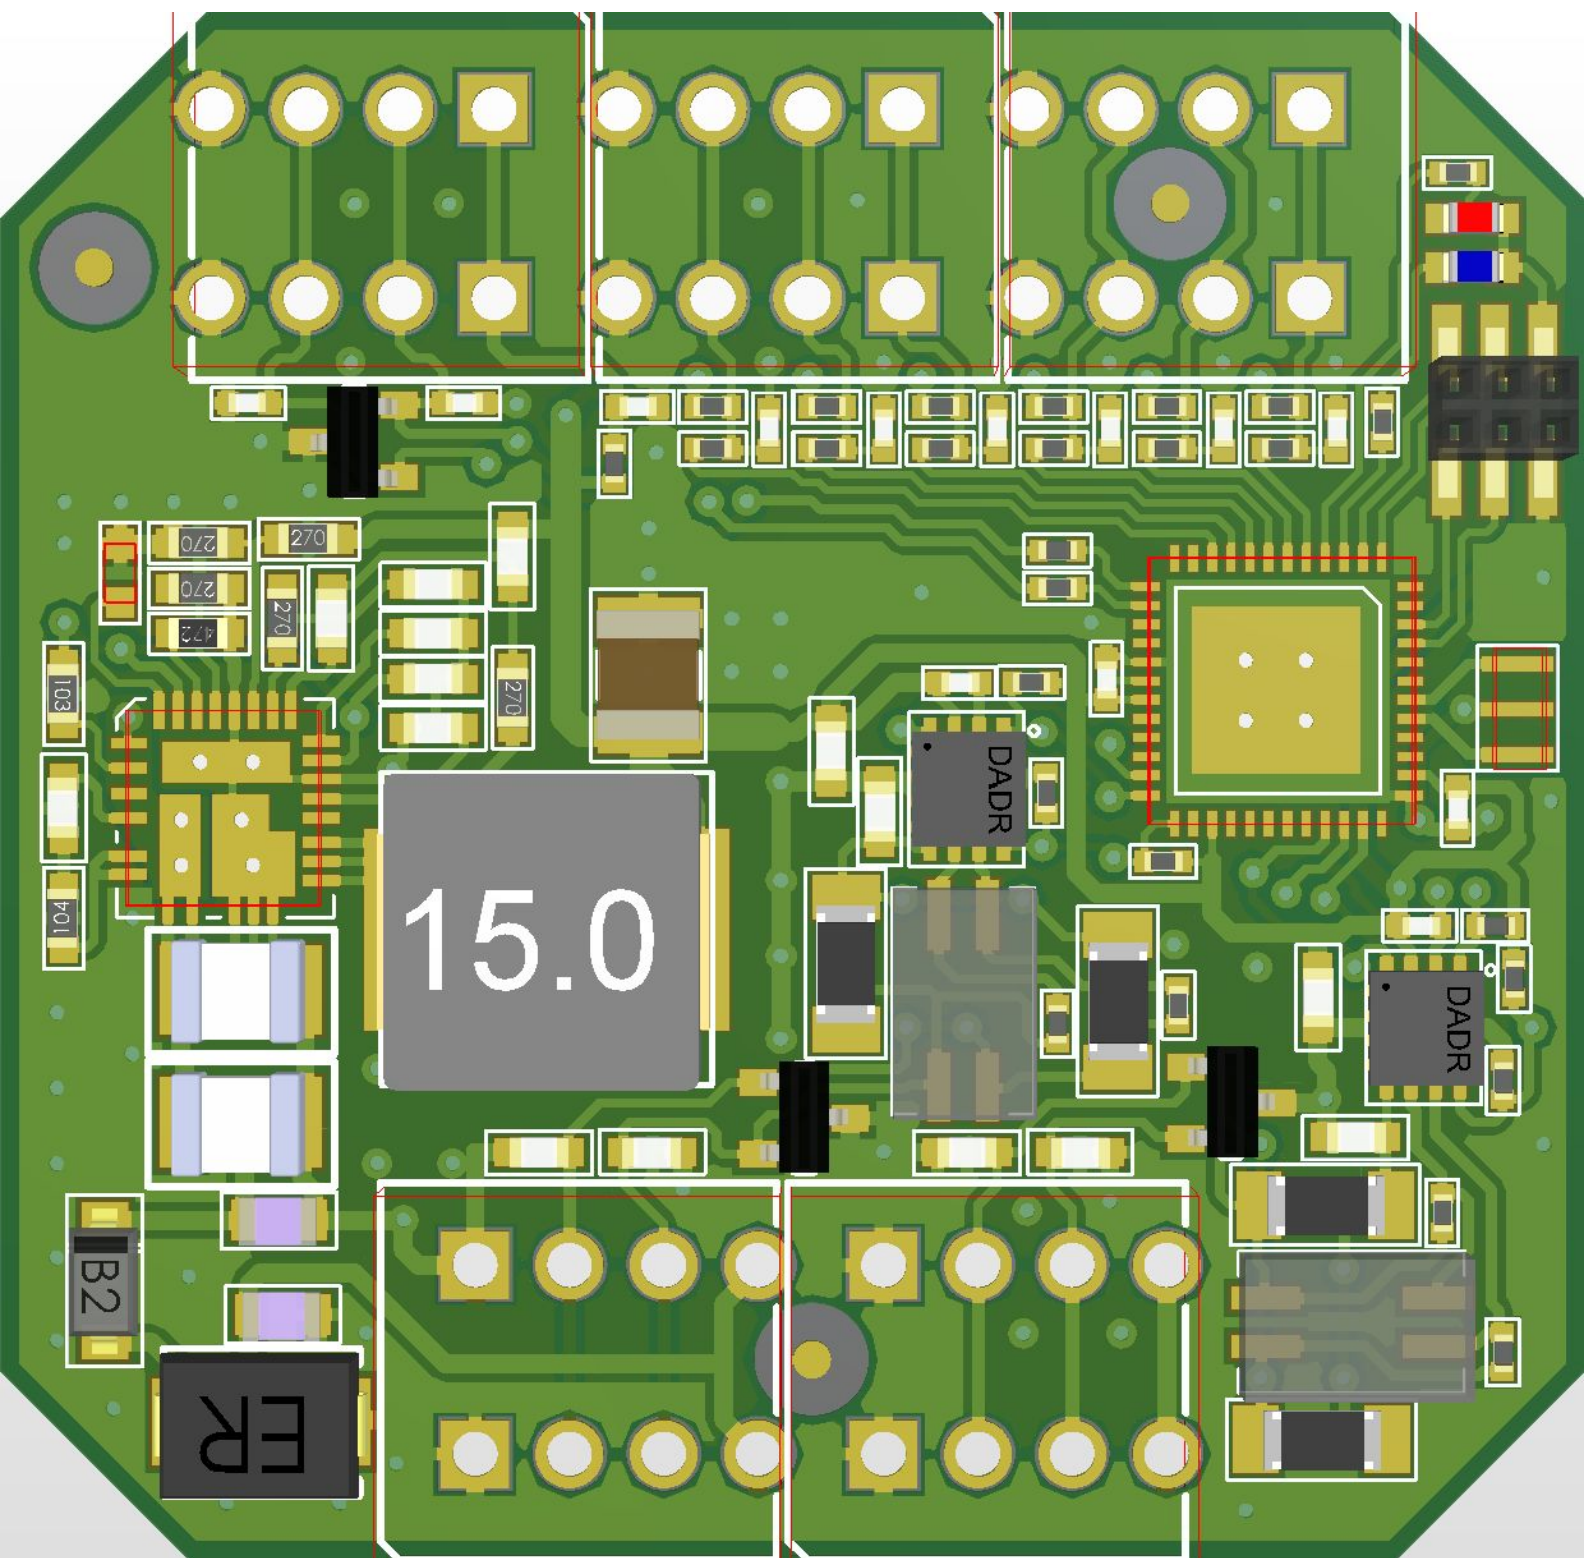

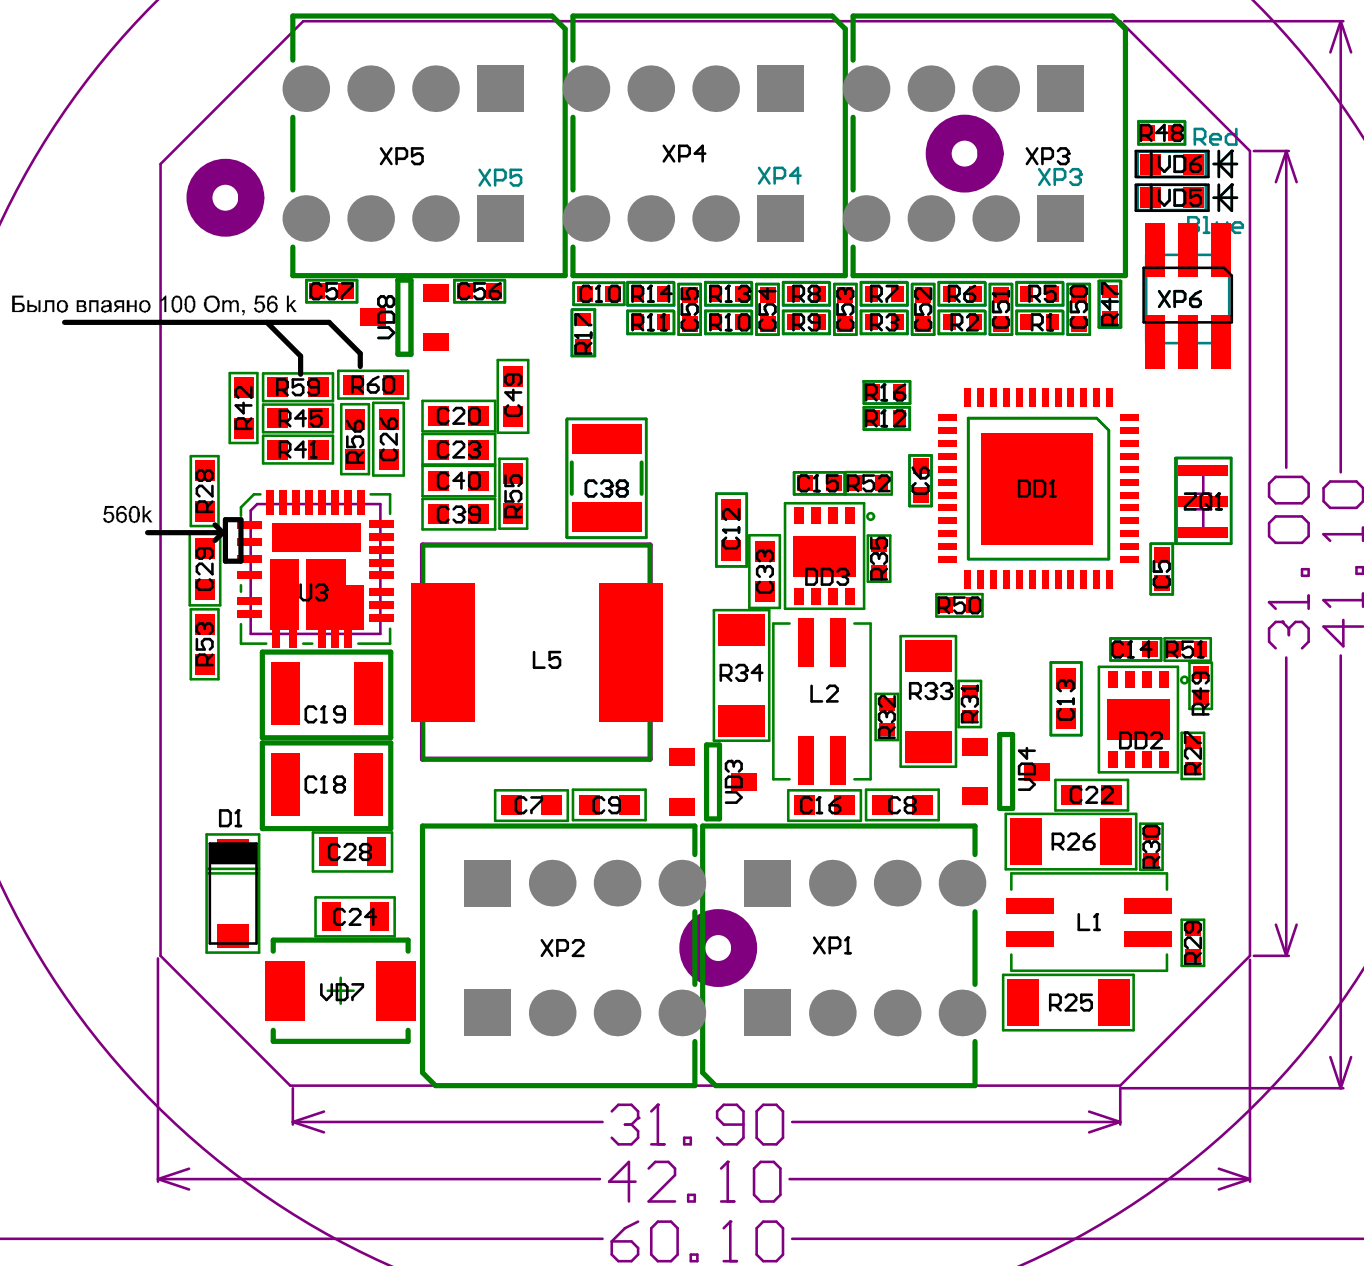

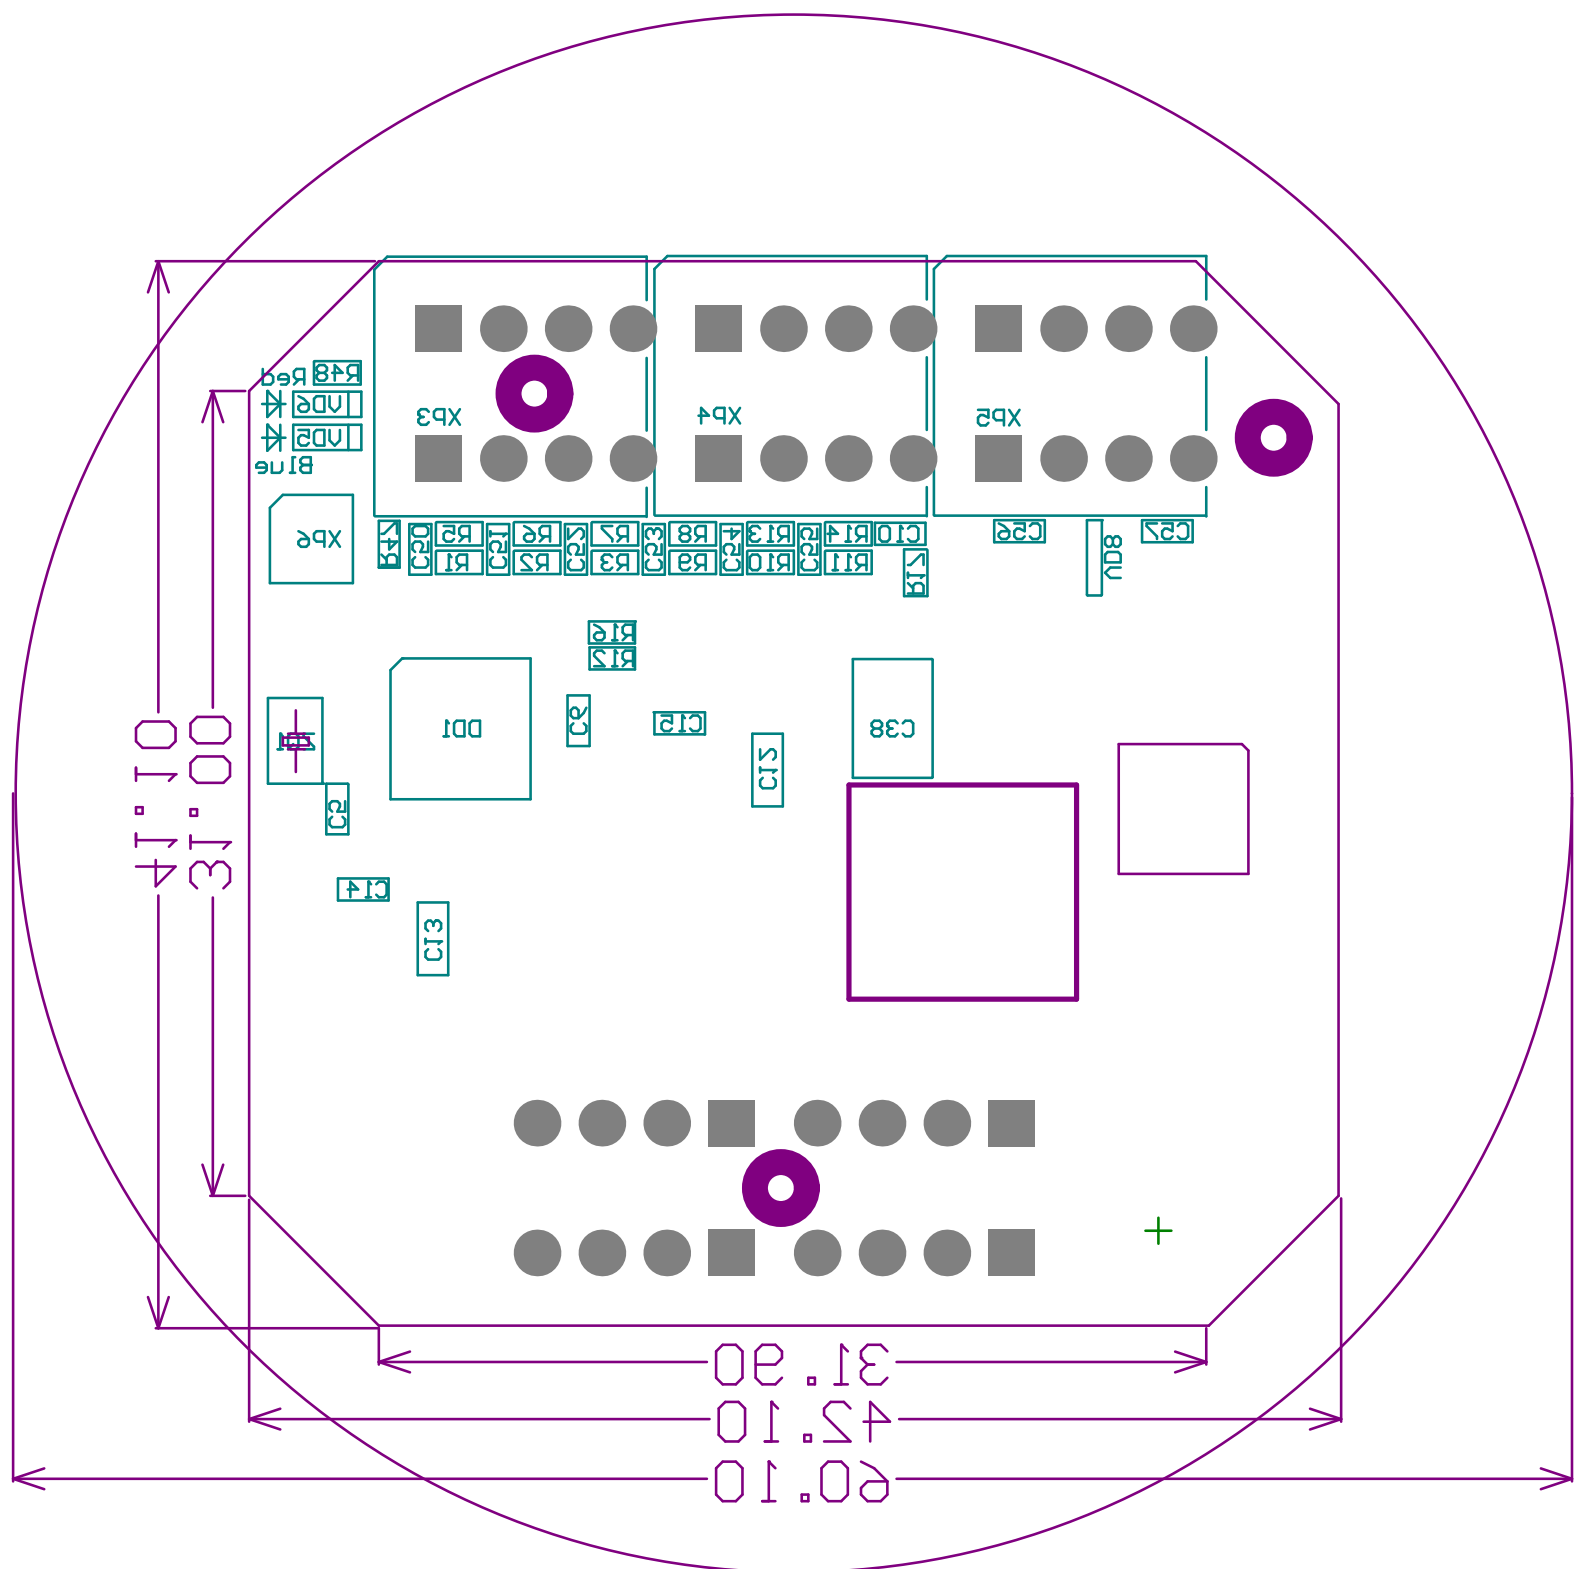

Bill of Materials

Bill of Materials For Project [XMC1404KEY4c.PrjPcb] (No PCB Document Selected)

Source Data From:	XMC1404KEY4c.PrjPcb
Project:	XMC1404KEY4c.PrjPcb
Variant:	None

Creation Date:	09.12.2018	20:56:30
Print Date:	09-Dec-18	8:59:26 PM

Footprint	Comment	LibRef	Designator	Description	Quantity
C0402	220nF	C0402	C5, C6	220nF 6.3V 10% 0603 X7R	2
C0603	100pF	C0603	C7, C8, C9, C16	CAP CER 100PF 25V X7R 0603	4
C0402	100nF	C0402	C10, C14, C15	100nF 10V 10% 0603 X7R	3
C0603	10uF	C0603	C12, C13	CAP CER 10UF 6.3V X5R 0603	2
C3225 EIA-CC1210	2.2uF	C1210	C18, C19	2.2uF 1210 X7R 100V	2
C0603	1.0nF	C0603	C20	CAP CER 1.0nF 50V X7R 0603 1.0 mOhm	1
C0603	4.7nF	C0603	C22, C33	CAP CER 4700PF 50V COG 0603	2
C0603	39nF	C0603	C23	39nF 50V COG 0603	1
C0805	100nF	C0805	C24, C28	100nF X7R 100V 0805 20%	2
C0603	2.2nF	C0603	C26	CAP CER 2.2nF 50V X7R 0603 1.0 mOhm	1
C0603	100nF	C0603	C29	0.1uF 25V BX 10% 0603 Ceramic	1
1210_280	47uF	Cout_12V	C38	CAP CER 47UF 16V X5R 1210	1
C0603	4.7uF	C0603	C39	4.7uF 20% X5R 16V 0603	1
C0603	1uF	C0603	C40	1UF 20% 0603 Y5V 16V	1
C0603	22nF	C0603	C49	CAP CER 22nF 50V X7R 0603 1.0 mOhm	1
C0402	1.2nF	C0402	C50, C51, C52, C53, C54, C55, C56, C57		8
SOD-123 - MBR0520T	MBR0580S1	MBR0580S1	D1	Диод SMD MBR0580S1 DIODES	1
PG-VQFN-48-73-XMC1404-Q048	XMC1404-Q048	XMC1404-Q048	DD1	XMC1404-Q048X0200	1
8DFN_MCP2561	MCP2561	MCP2561	DD2, DD3	High speed CAN transceiver with SPLIT and 5V microcontroller interface	2
WE-SLM-2x51	2x51uH	WE-SLM-2x51	L1, L2	SMD Common Mode Line Filter	2
IHLP3232DZER150M11	15uH	IHLP3232DZER150M11	L5	IHLP3232DZER150M11	1
CSTNE20M0V53C000R0	20MHz	CSTNE20M0V53C000R0	QZ1	CS TNE 20.00MHz Built in Caps 15 pF	1
R0402	1k	R0402H	R1, R2, R3, R9, R10, R11	1k 5% R0402	6
R0402	47k	R0402H	R5, R6, R7, R8, R13, R14	47k 5% R0402	6
R0402	100R	R0402H	R12, R16	100R 5% R0402	2
R0402	10R	R0402H	R17	10R 5% R0402	1
1206	60R	R1206	R25, R26, R33, R34	RES SMD 60 OHM 5% 1/2W 1206	4
R0402	10k	R0402H	R27, R35, R49, R50, R51, R52	RES SMD 10KOHM 5% 1/16W 0402	6
R0603H-103	10k	R0603	R28	RES SMD 10K OHM 5% 1/4W 0603	1
R0402	0R0	R0402H	R29, R30, R31, R32	RES SMD 0 OHM 5% 1/16W 0402	4
R0603H-470	402k	R0603	R41	RES SMD 402k 1% 1/10W 0603	1
R0603H-683	69.8k	R0603	R42	RES SMD 69.8k 1% 1/10W 0603	1
R0603H-2612	30.9k	R0603	R45	RES SMD 30.9kOHM 1% 1/10W 0603	1
R0402	4k7	R0402H	R47, R48	RES SMD 4.7KOHM 5% 1/16W 0402	2
R0603H-104	3.3 Om	R0603	R53	RES SMD 3.3 OHM 5% 1/10W 0603	1
R0603H-2612	1.21k	R0603	R55	RES SMD 1.21kOHM 1% 1/10W 0603	1
R0603H-2612	18.2k	R0603	R56	RES SMD 18.2KOHM 1% 1/10W 0603	1
R0603H-5622	10.0k	R0603	R59	RES SMD 10.0k OHM 1% 1/10W 0603	1
R0603H-5622	51.1k	R0603	R60	51.1k 1% 0603 50ppm	1
SiC464_MLP55-27L	SiC464	SiC464	U3	SiC464	1
SOT-23	NUP2105L	NUP2105L	VD3, VD4, VD8	NUP2105L 24V 350W protect the CAN transceiver	3
Led0603Blue	Blue	Led0603Blue	VD5	Ultra lighet PT-1608H183BC Blue InGaN LED	1
Led0603Red	Red	Led0603Red	VD6	Ultra lighet RL-S190SC Super Red InGaN LED	1
SMBJ51-DO-214AA	SMBJ51	SMBJ51	VD7	51V Suppressor 82.4V SMBJ51	1
PTSM 0,5/ 4-2,5-H THR R32	PTSM 0,5/ 4-2,5-V THR R44	PTSM 0,5 4-2,5-V THR R44_CAN, PTSM 0,5 4-2,5-V THR R44	XP1, XP2, XP3, XP4, XP5	PTSM 0,5/ 4-2,5-V THR R44	5
PBD1.27-6-smd	PLD-6	PLD-6-1.27	XP6	6PIN Connector Assignments pich 1.27	1

94

Approved	Notes