Observed accuracy / speed trade-off

Complete tracking denominator per arm: 1,294 | failures: 255 (19.71%) → 47 (3.63%)

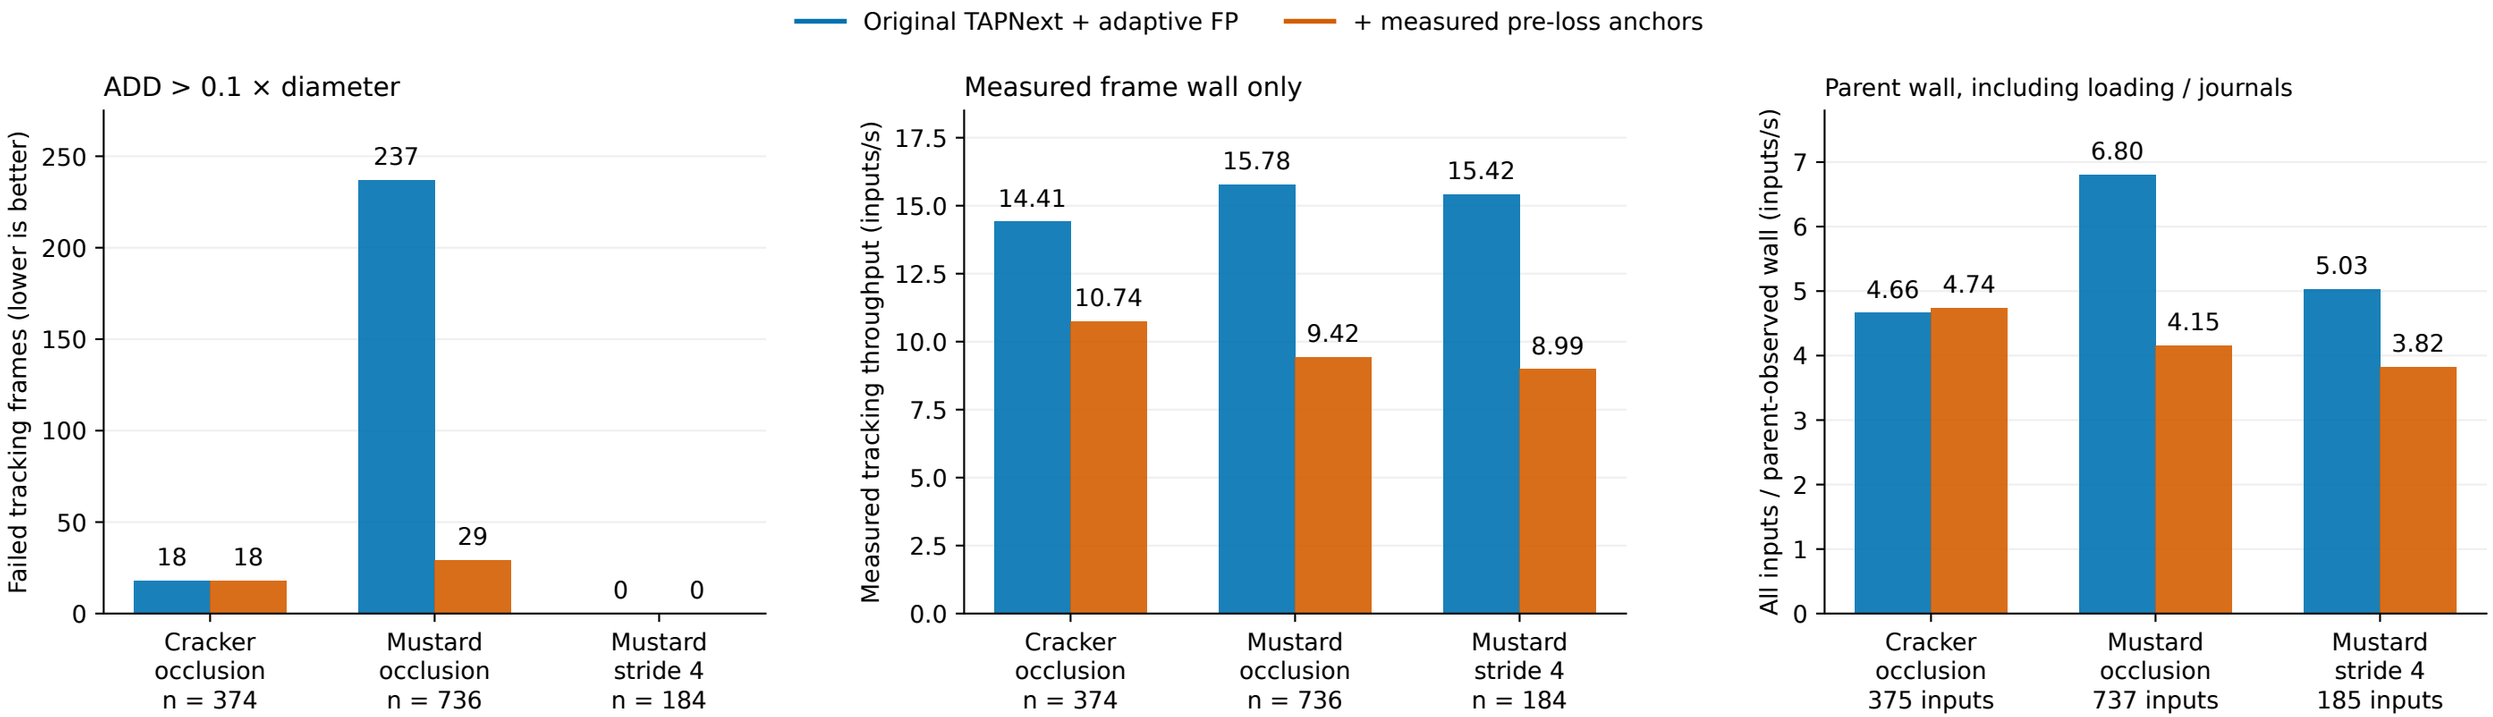

REUSED DEVELOPMENT DATA • One run per arm/case • All states tentative; identity not certified

Middle: measured tracking frame wall excludes EVERY frames.json journal rewrite, model load, registration, frame zero and finalization.
Right: all input slots including frame zero / per-run parent wall; includes loading, registration, per-frame journals and child overhead.
Fresh processes with uncontrolled cache temperature; no production or isolated cold-start FPS claim. Child-wall throughput is also provided in the CSV.