

500KG MINI DUMPER



SUPERIOR PERFORMANCE



ENGINE MODEL

Briggs&Stratton

CONTAINER SIZE

1050*730*730mm


RATED POWER

6.5HP


OPTION: ☐ **LIFTING RACK**

PRODUCT STRUCTURE

500KG LIFTABLE DUMPER

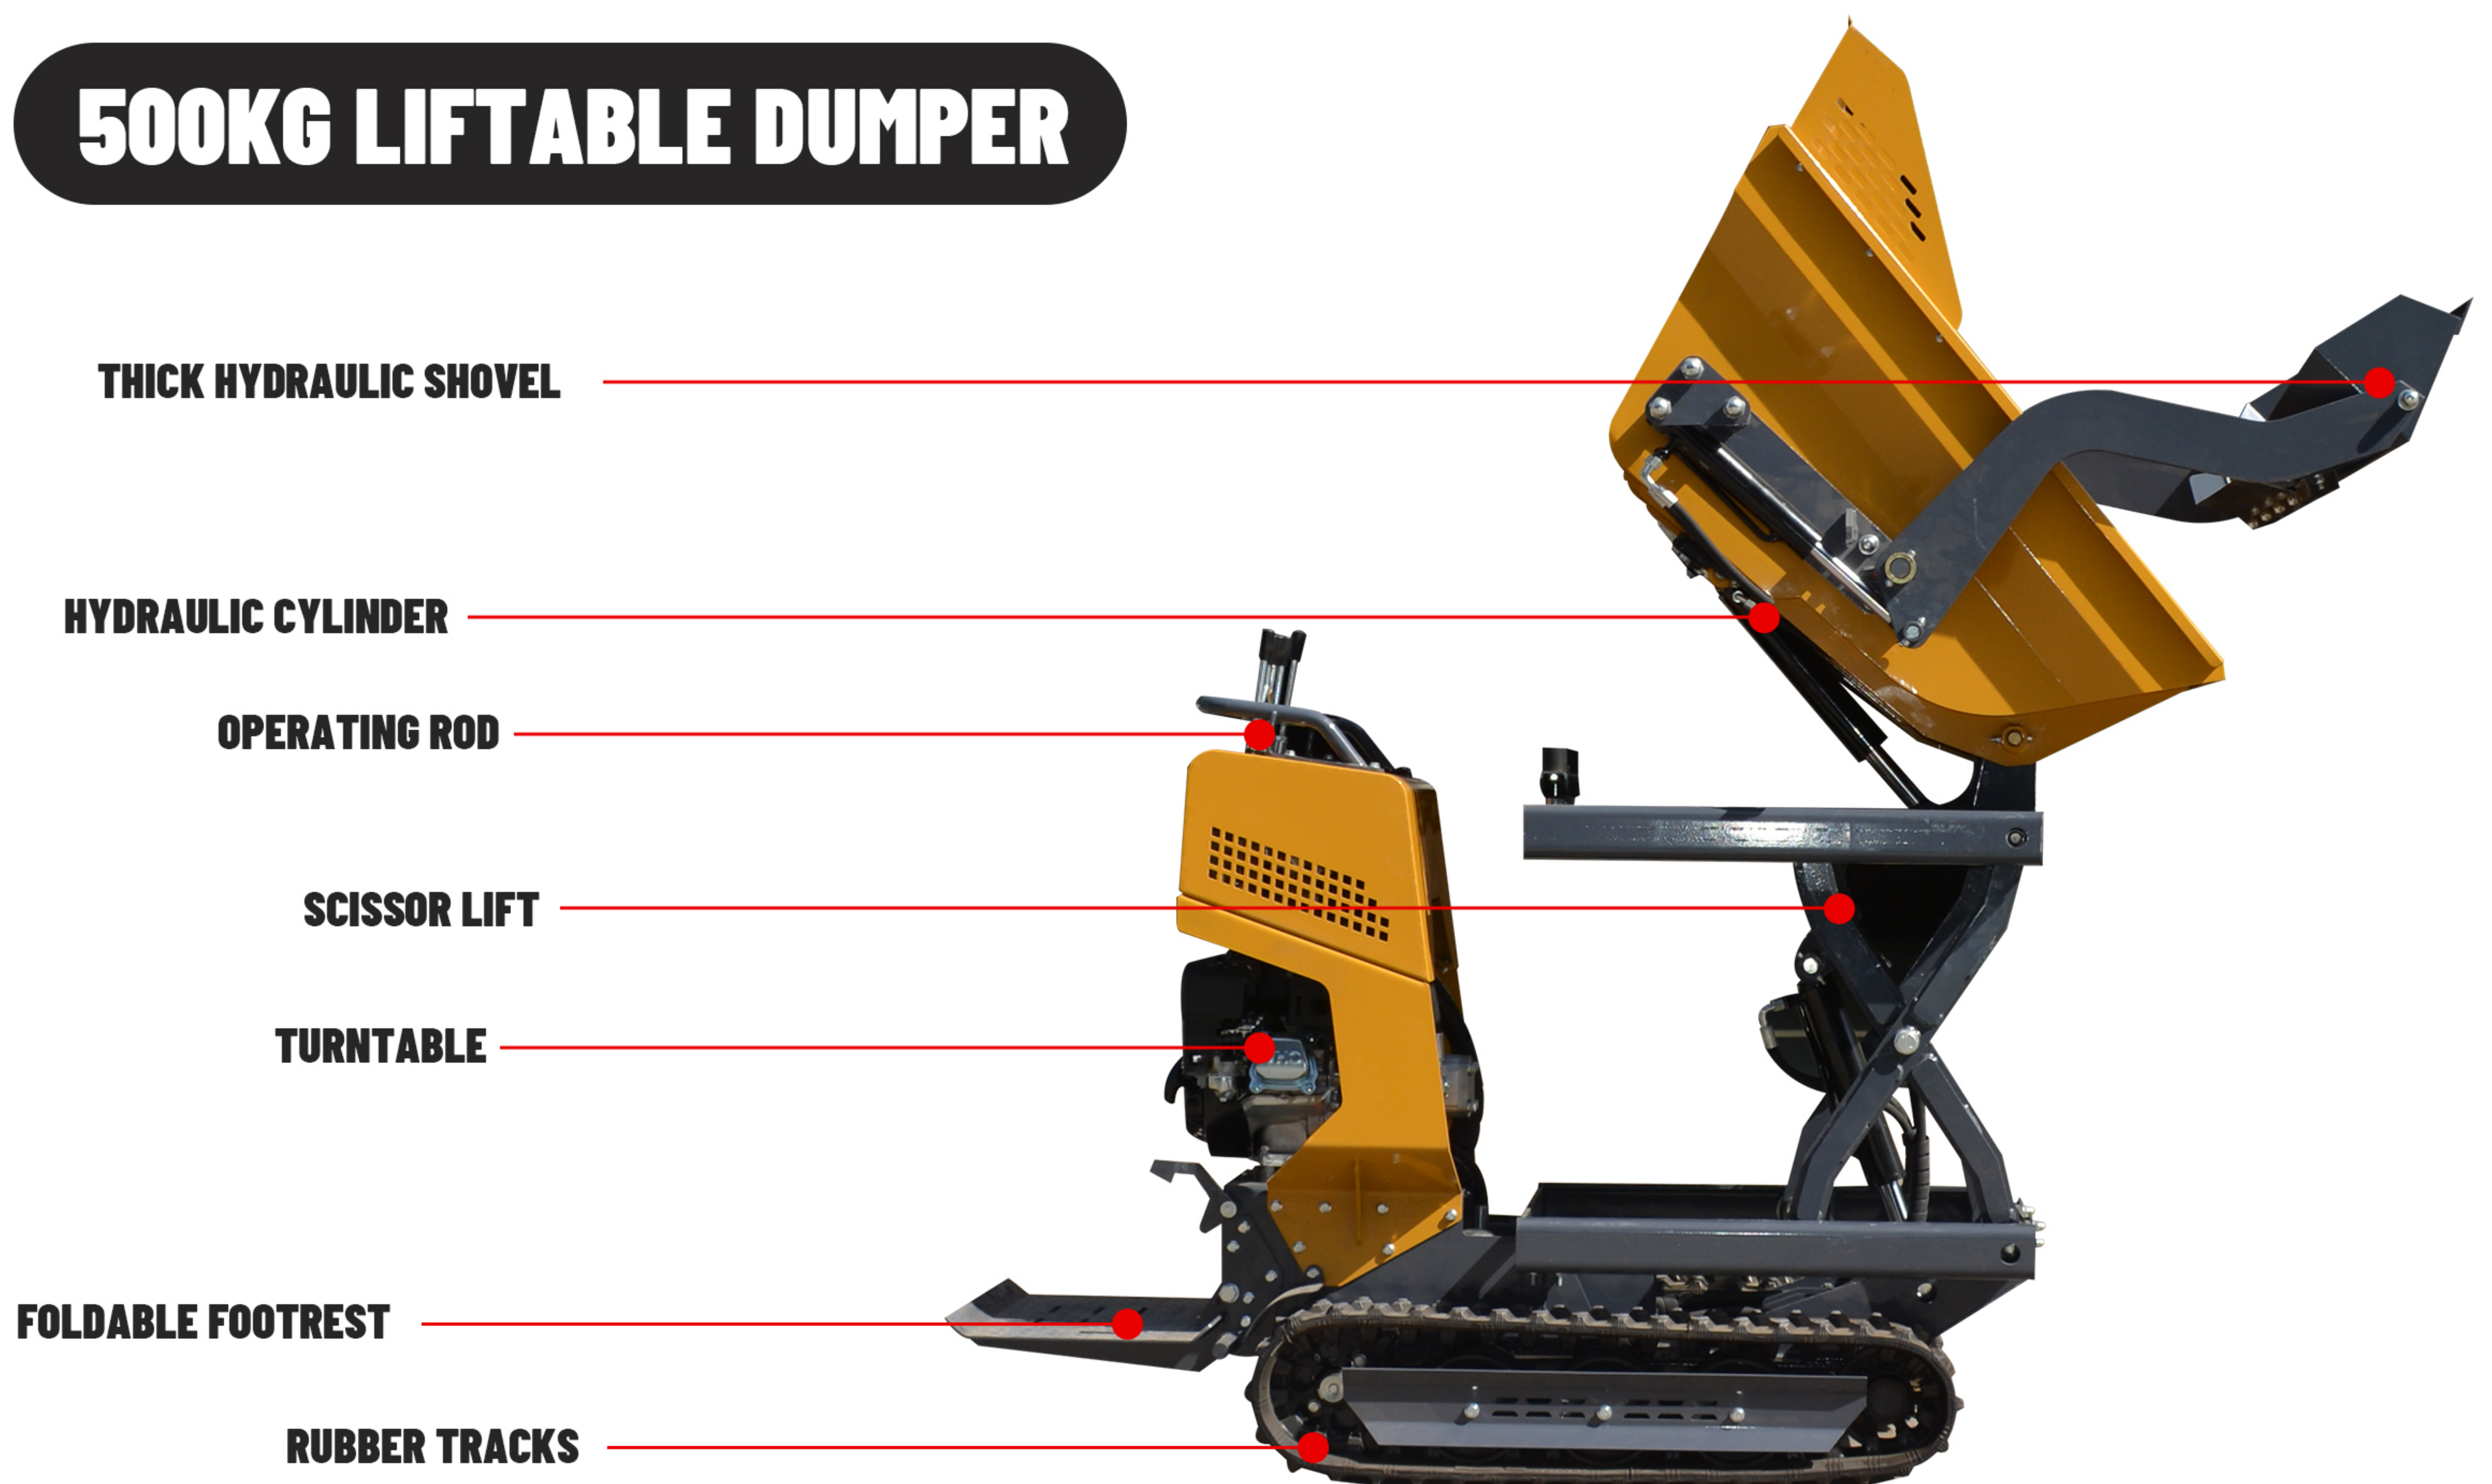

500KG DUMPER

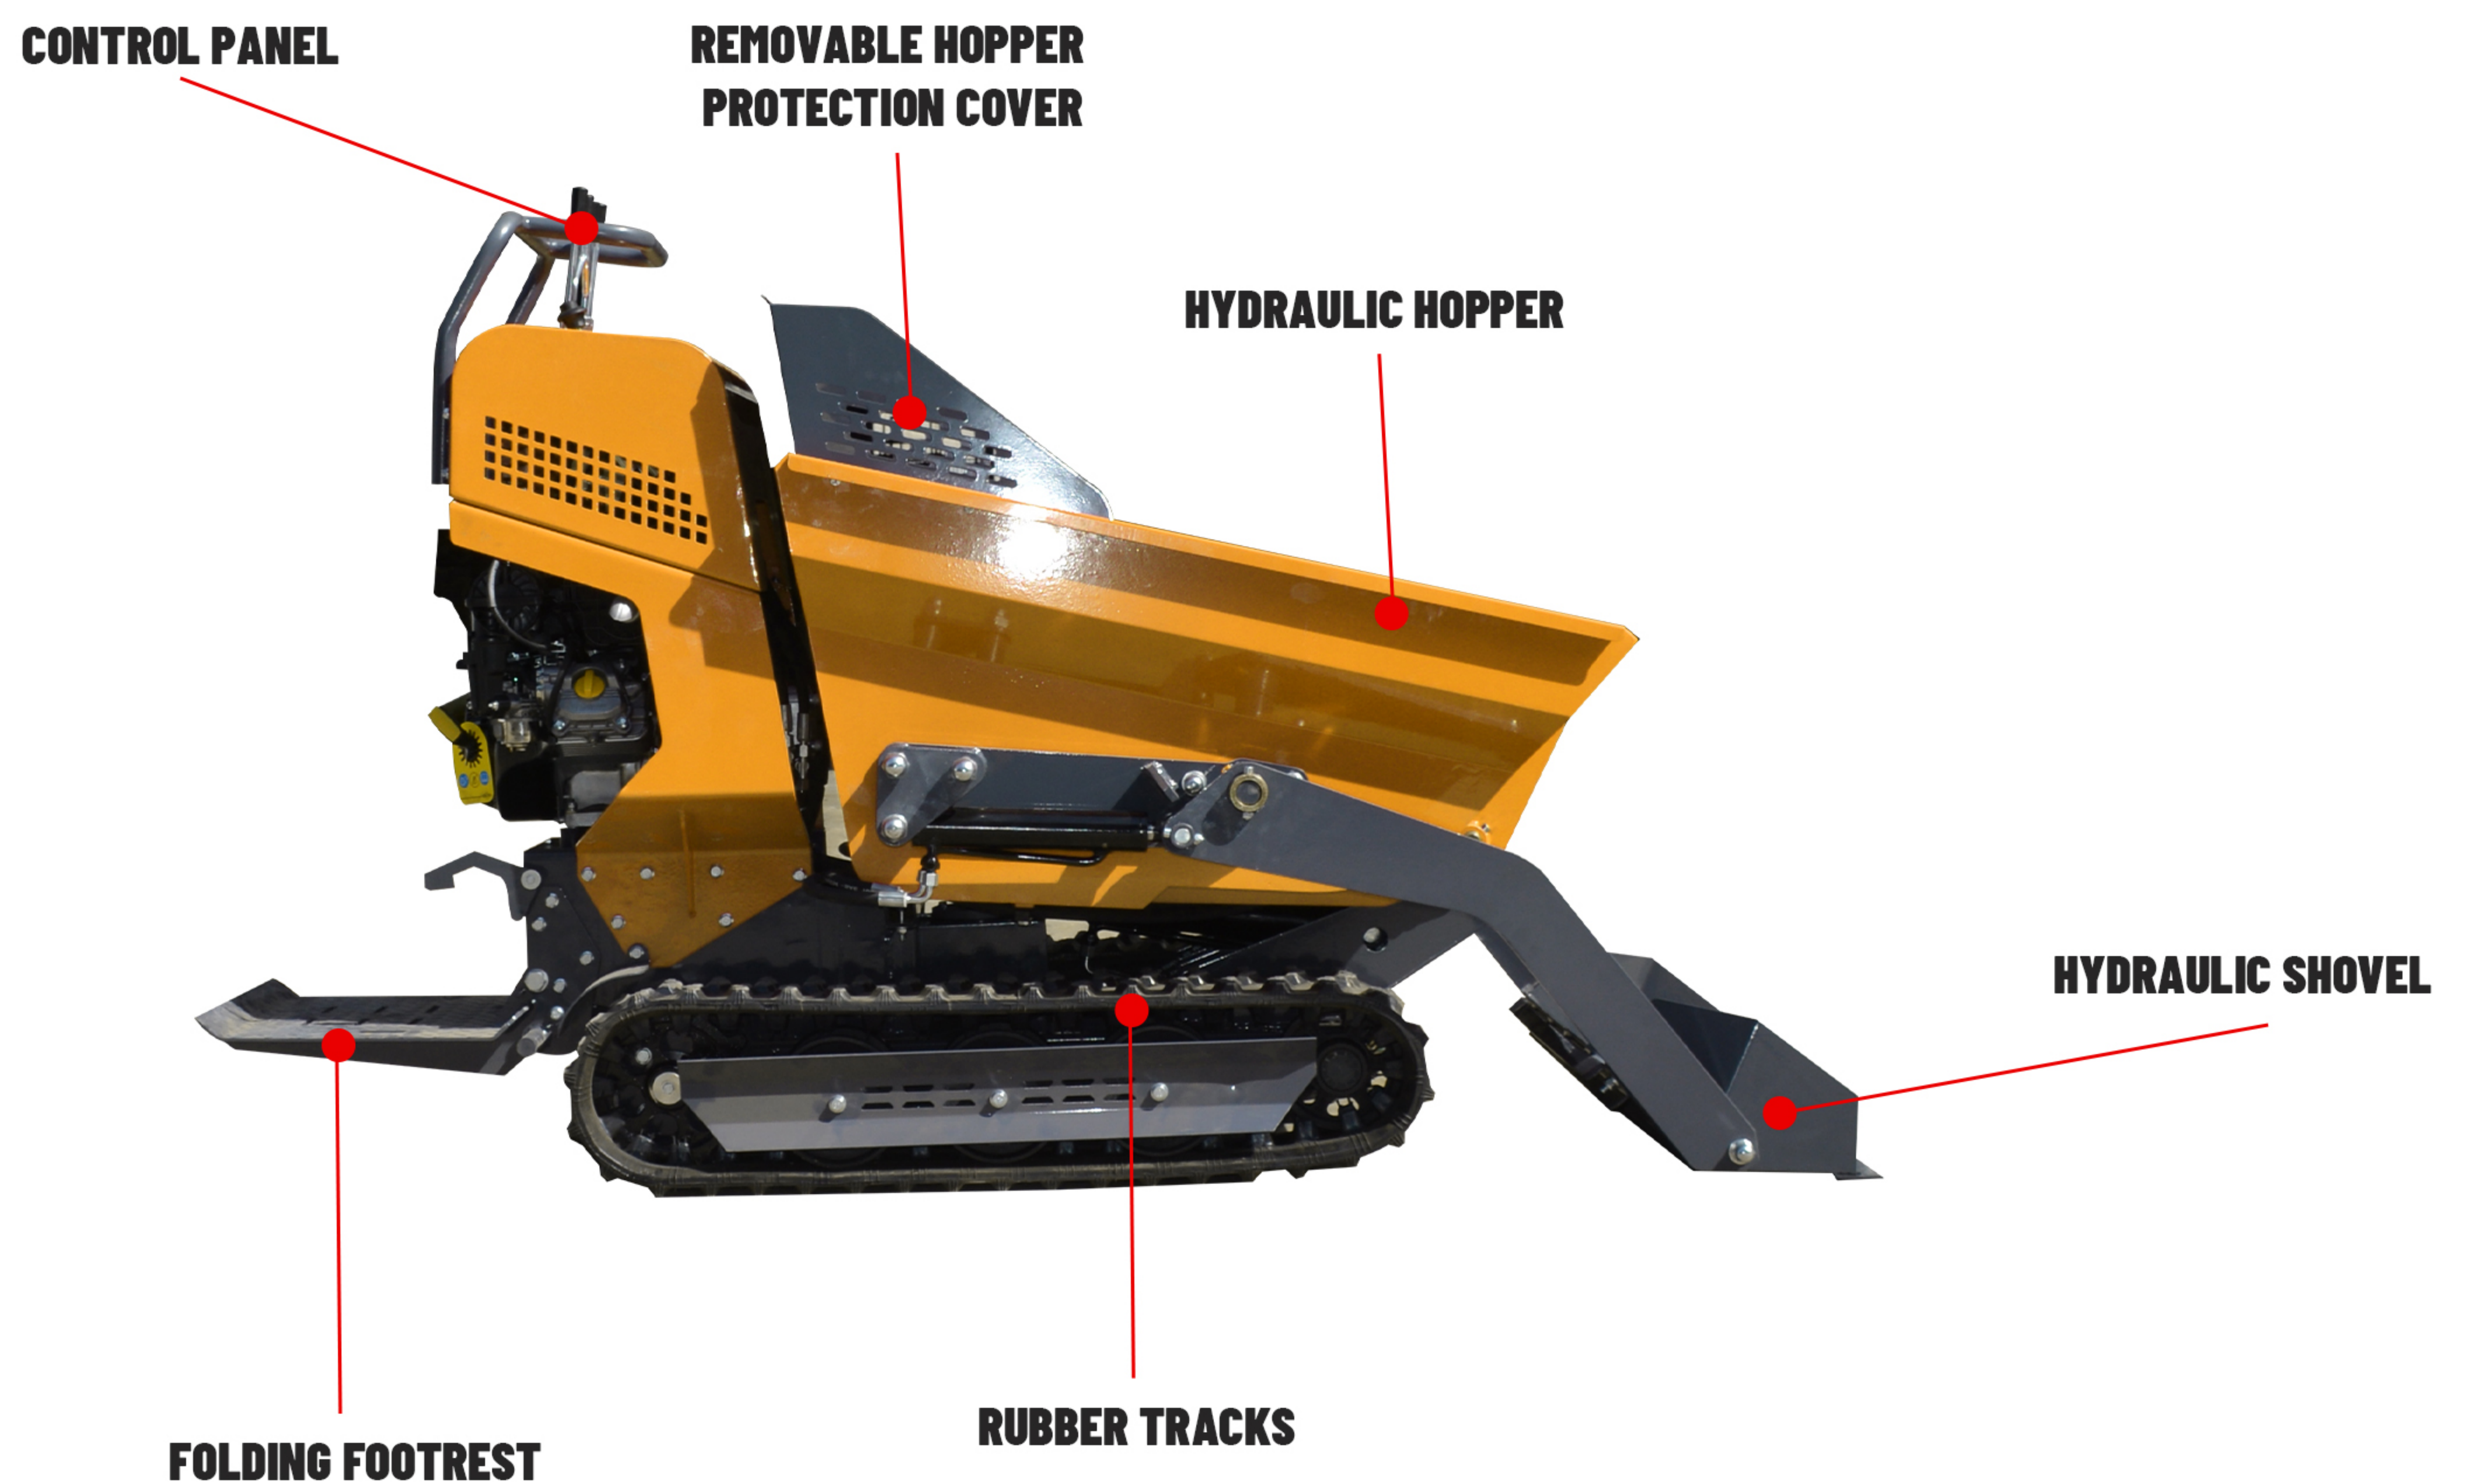

MECHANICAL DISPLAY AND OPERATIONAL DETAILS

HYDRAULIC LIFTING PLATFORM

Hydraulic lifting platform with a maximum height of 1200mm, ideal for use in warehouses and workshops.



THICKENED CARRIAGE

The carriages are constructed from thick steel plates, providing strong load-bearing capacity, making them suitable for short-distance transportation of heavy loads.

RUBBER TRACKS

Engineered rubber tracks offer excellent protection for the ground, reduce vibration and fatigue, and minimize the risk of sinking into soft soil.





PERFORMANCE PARAMETERS

500KG DUMPER

Engine Model	Briggs & Stratton Pioneer
Engine Type	Single Cylinder ,OHV,4-Stroke,Air Cooling
Displacement	203CC
Rated Power	6.5HP/3600rpm
Fuel Type	92#Gasoline
Fuel Tank Capacity	3.6L
Fuel Consumption	≤0.395g/kw·h
Engine Oil Capacity	0.6L
Total Weight	414kg
Max Loading Weight	500kg
Machine Size (with foot pedal)	1570 (2050) *880*1300mm
Container Size	1050*730*730mm
Chassis Width	700mm
Track Width	180mm
Track Grounding Length	1000mm
Chassis Ground Clearance	110mm
Cargo Box Capacity	200dm ³
Tipping Systme	Hydraulic Tipper
Tilting Angle	90°
Unloading Height Above Ground	260mm
Walking Speed	2.88km/h
Minimum Turning Radius	1.15m
track Gauge	520mm
Climbing Abillty	20°
Hydraulic Oil Model	46#Anti-wear Hydraulic Oil
Hydraulic Tank Capacity	8.2L

PERFORMANCE PARAMETERS

500KG LIFTING DUMPER

Engine Model	Briggs & Stratton Pioneer
Engine Type	Single Cylinder ,OHV,4-Stroke,Air Cooling
Displacement	203CC
Rated Power	6.5HP/3600rpm
Fuel Type	92#Gasoline
Fuel Tank Capacity	3.6L
Total Weight	550kg
Max Loading Weight	500kg
Machine Size (with foot pedal)	1570 (2050) *880*1450mm
Container Size	1050*730*730mm
Chassis Width	700mm
Maximum Rise	1200mm
Unloading Height Above Ground	1050mm
Tipping Interval	220mm
Track Width	180mm
Track Grounding Length	1000mm
Chassis Ground	110mm
Cargo Box Capacity	200dm ³
Tipping Systme	Hydraulic Tipper
Tilting Angle	90°
Walking Speed	2.88km/h
Minimum Turning Radius	1150mm
Track Gauge	520mm
Climbing Abillty	20°

