

More Flexible, More Durable



KPCD ELECTRIC FORKLIFT



More Flexible, More Stable

The electric forklift is compact in size, can move flexibly in tight spaces. It can quickly move goods when needed and also carries weight while maintaining balance to ensure that the goods being transported are delivered smoothly. This makes electric forklifts an ideal choice for logistics and cargo handling in warehouses, factories, and other industrial environments.



Factory



Warehouse



Port



Airport



Logistics center



KPCD electric forklift Product Introduction



More flexible

The electric forklift is compact and can operate flexibly in tight spaces

With a compact 1200mm machine width and a minimum turning radius of 1550mm, the forklift can easily pass through narrow areas or more complex road conditions. It is convenient for loading and unloading, stacking and short-distance transportation operations.

More Stable

The tires are not easy to slip, and the goods run more smoothly

The rear of the tire is a solid tire 500-8, which is strong and wear-resistant. The tire design is uneven, which increases the anti-skid performance and makes it difficult for you to slip when working.



KPCD electric forklift Product Introduction



More flexible

Forklift mast is strong, escorting the transport of goods.

The forklift mast is made of international special steel H-beam with the width of 120mm-150mm, which is stable and firm, and can support the cargo of 1T-3T under the rated lifting capacity, and the maximum height can be reached to 3780mm during the operation.

The forklift is driven by two hydraulic cylinders in parallel. The maximum tilting angle of the front and rear tilting angles of the gantry can reach 35° , which can ensure the stability of the goods during loading, unloading and operation.



Electric-charged forklift trucks have stable climbing ability and can pass undulating road surfaces without ripples

When facing uneven and undulating road surfaces, the 20% stable climbing ability enables the vehicle to cross the road surface easily, unlike other electric forklift trucks that need to go around, thus improving work efficiency.

KPCD electric forklift Product Introduction

More Efficient

Power-stabilized motor output leads to higher operating efficiency

The forklift is driven by a brushless motor with a maximum motor power of 10 KW. under full load conditions, the forklift can run at a maximum speed of up to 12 KM/h, making the work more efficient in loading and unloading.



More environmentally friendly

Power-stabilized motor output leads to higher operating efficiency

Electric forklifts use batteries as power. The batteries are preferably selected from the best quality battery brands in China, such as CHILWEE lead-acid maintenance-free batteries. Compared with internal combustion forklift, electric forklift has no exhaust emission during operation, which is cleaner and more environmentally friendly

1 Lead / Zinc Terminals


What transfers the power held in the battery to the trolling motor.

2 Battery Acid

An Electrolyte, typically Sulfuric acid.

3 Battery Plates

Made from Lead and Lead dioxide.

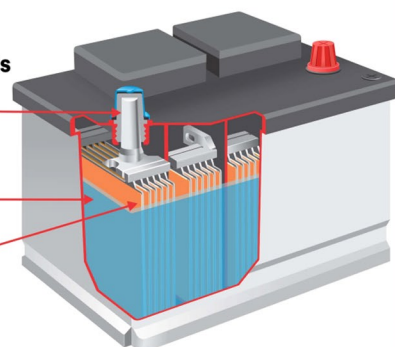

Lighting systems

Lighting system adopts LED lighting, LED lamp power conversion rate reaches 80%, compared with traditional lamps can save energy. Light-emitting diode as a light source, luminous efficiency is higher than the traditional incandescent and fluorescent lamps, can provide better lighting effect, convenient for drivers to work at night.



KPCD electric forklift Product Introduction

More Convenient



Panel placed in front of the seat for easy operation by the driver

The operator needs to frequently check and operate the speed, power, temperature and fault indicators on the panel during operation. Placing the panel in front of the seat allows the operator to always be aware of the operating status of the forklift and improves work efficiency.



Specifications

Model configuration	KPCD15	KPCD20	KPCD25	KPCD30
Rated capacity	1.5T	2T	2.5T	3T
Forklift body width	1200mm	1150mm	1150mm	1200mm
Forklift body length(fork excluded)	3170mm	3120mm	3370mm	3520mm
Forklift body height	3750mm	3750mm	3730mm	3780mm
Forklift mast inclination,front/rear	35°	35°	35°	35°
Minimum turning radius	1550	1700	1950	2050
Lift motor power	AC4.0kW	AC5.5kW	AC5.5kW	AC7.5kW
Drive motor power	AC4.0kW	AC5.5kW	AC7.5kW	AC7.5kW
Travel speed,full load/no load	12 km/h 14 km/h	12 km/h 14 km/h	12 km/h 14 km/h	12 km/h 14 km/h
Lifting speed,full load/no load	190mm/s 160mm/s	160mm/s140mm/s	160mm/s140mm/s	140mm/s140mm/s
Maximum climbing gradient,full load/no load	20%/15%	20%/15%	20%/15%	20%/15%
Battery capacity	100ah	100ah	100ah	200ah
Rated voltage	72V	72V	72V	72V
Battery quantity	6	6	6	6
Battery brand	Chilwee	Chilwee	Chilwee	Chilwee
Lighting system	LED	LED	LED	LED
Tire Type	Solid tire	Solid tire	Solid tire	Solid tire

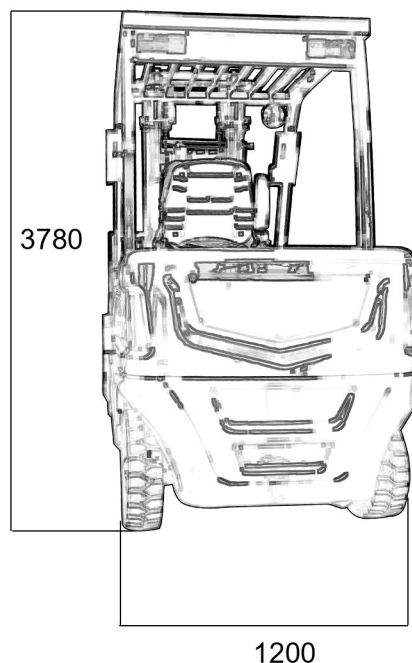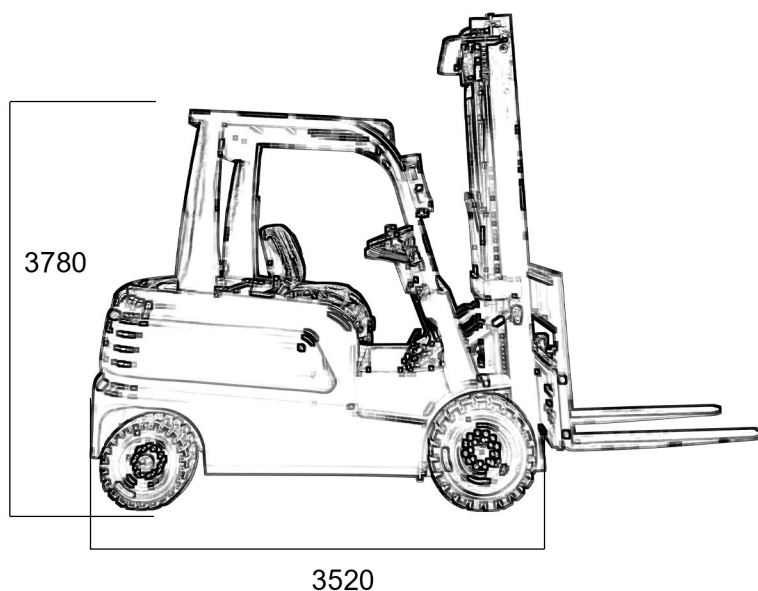

Jining Nicosail Machinery Co., Ltd.

Website: [//www.nicosail.com/](http://www.nicosail.com/) Email: Bob<admin@nicosail.com> Address: Jining Nicosail Machinery Co., Ltd.
cn,Room 2004, Block C, Haineng International, Jinyu Road, Jining City, Shandong Province