

More Flexible, More Durable



OKW18



More Flexible, More Durable

It has powerful digging capabilities and more flexible operational performance, which can rival high-end excavators. The OKW18 can more easily complete complex tasks ranging from large construction sites to small working environments.



Agriculture



Demolish



Forestry



Engineering



Landscaping



Pipeline



Construction site



Optional: • Telescopic Chassis • Cab • Air Conditioning

Okw18 Pass Demonstration



True Tailless

The overall appearance adopts a tailless design, which is flexible and versatile. It can easily operate in narrow spaces such as urban streets and basements, improving construction safety.

Swing Arm Function




The excavator arm can swing 50 degrees to the left and right, allowing it to work parallel to walls in narrow spaces and meet various extreme conditions in construction.



SUPERIOR PERFORMANCE


AE Simulation System Analysis: Boom Life Increased By 30%, And Excavation Force Reached 16 kn

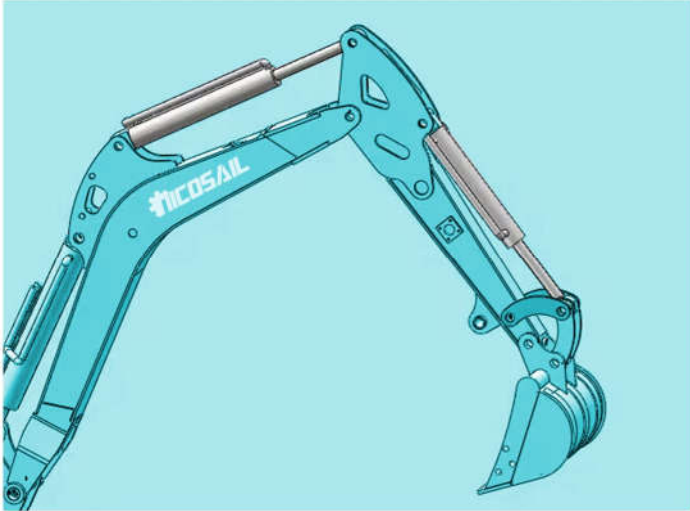


The key hydraulic components adopt the latest technological achievements, with a response speed increase of 8%, and a walking motor increase of 5%. The hydraulic control is precise, which can maintain strong excavation ability and excellent work efficiency.

Multiple Sets Of Pipeline Selection

Equipped with standby hydraulic pipelines, it can achieve rapid replacement and further expand the adaptability to working conditions. Standard crushing pipeline, with multiple pipelines available to meet diverse tool requirements

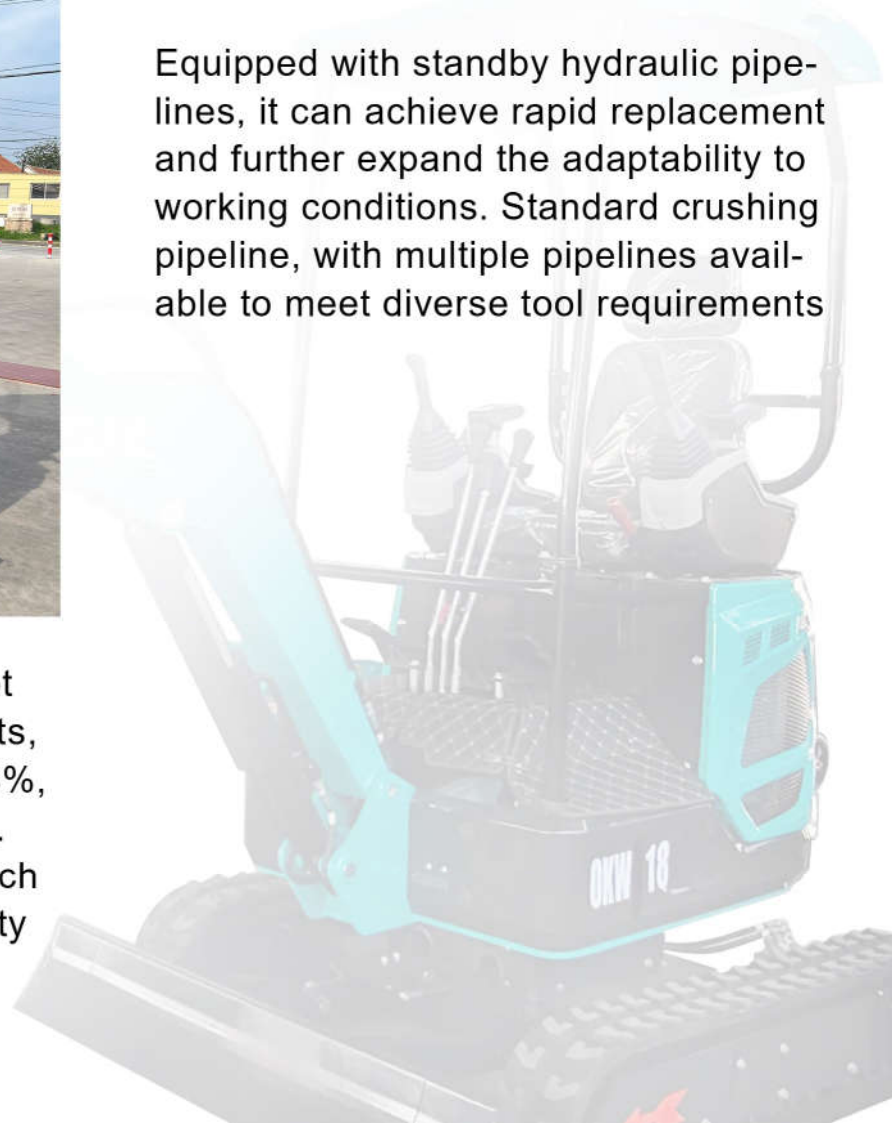

COMFORTABLE AND EASY TO MAINTAIN

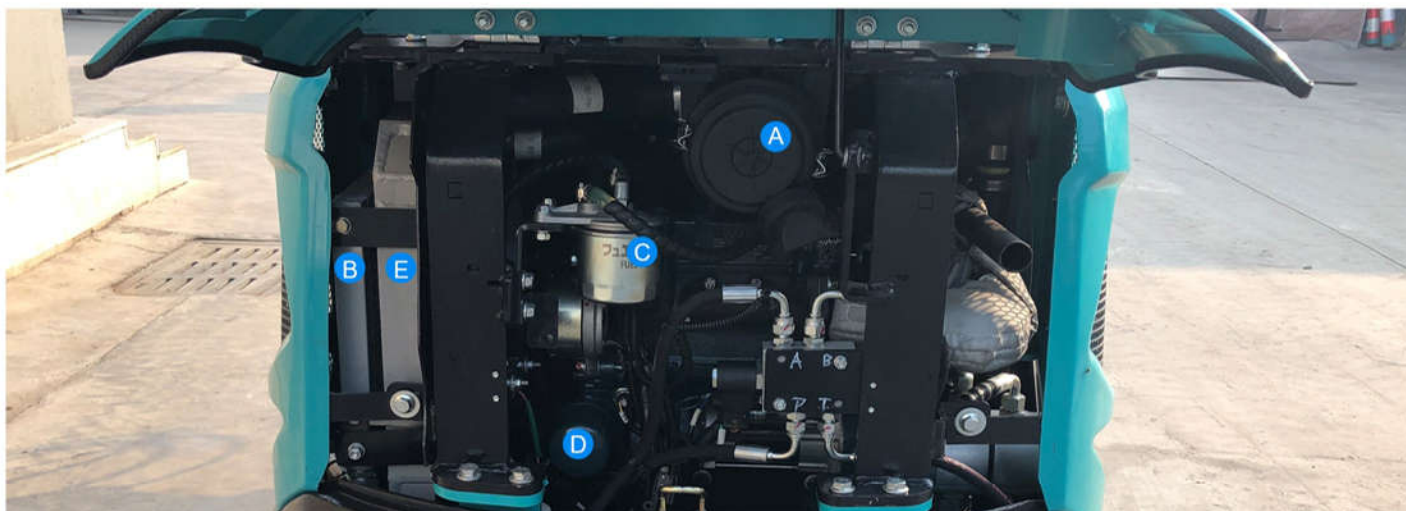

A. Air filter **B.** Hydraulic Oil Cooler **C.** Fuel filter **D.** Oil filters
E. Radiator



Easy To Access, Easy To Service

In maintenance mode, the inspection and maintenance of the air filter and oil-water separator are easily accessible; checking and topping up the coolant is very convenient.

Hydraulic walking



Comfortable Driving Experience


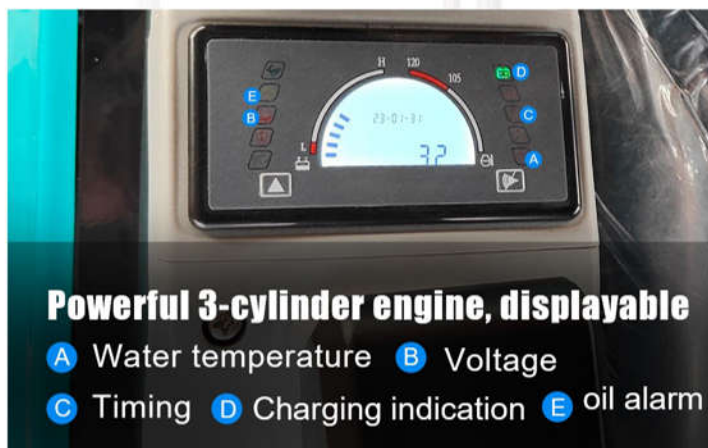
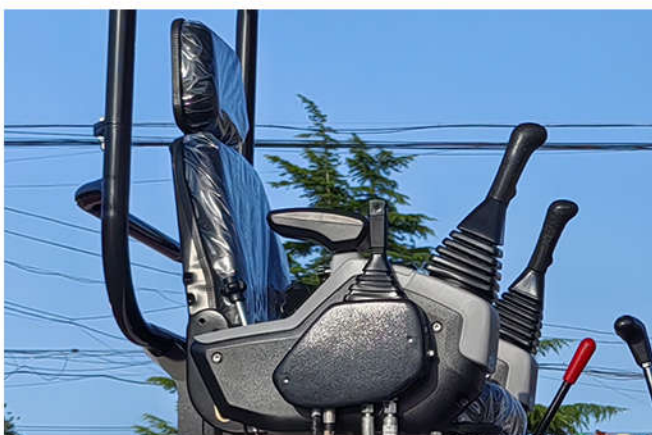


Powerful 3-cylinder engine, displayable

A Water temperature **B** Voltage
C Timing **D** Charging indication **E** oil alarm

Specifications

Model		OKW18
Engine	type	kubota D722/902 LAIDONG385
	power rating(kw)	10.2/11.8
Appearance	Overall bandwidth(mm)	1100
	Total height (to the ceiling)(mm)	2200
	Overall length(mm)	4200
	Machine size (width and height)(mm)	1100×1800
	Standard shovel bucket width(mm)	400
	Dig bucket capacity (cbm)	0.04
	Arm swing angle (left and right) (°)	50×50
	Track grounding length(mm)	1520
Hydraulic pressure system	Maximum mining depth(mm)	1900
	Maximum excavation distance(mm)	3300
	Maximum excavation height (mm)	2610
	least radius of gyration (mm)	1550
	Hydraulic flow (L/Min)	22
Working pressure	(MPa)	20
Speed of walking	(km/h)	3.0

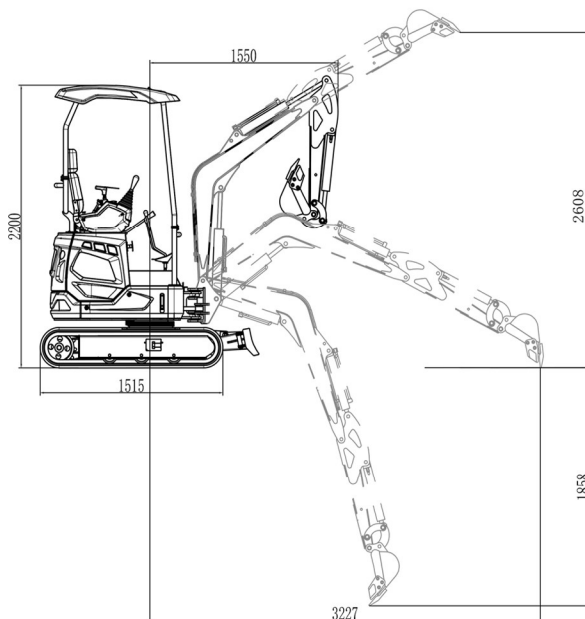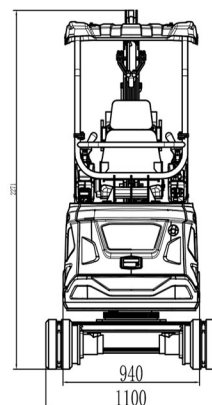

Jining Nicosail Machinery Co., Ltd.

Website: [//www.nicosail.com/](http://www.nicosail.com/) Email: Bob<admin@nicosail.com> Address: Jining Nicosail Machinery Co., Ltd.
cn,Room 2004, Block C, Haineng International, Jinyu Road, Jining City, Shandong Province