

Hydrostatic Telescopic Wheel Loader

ZL918



ZL918 Telescopic loader
More Flexible **More Durable**

KEY SPECIFICATIONS & OPTIONAL CONFIGURATIONS



OPTIONAL CONFIGURATIONS


- Cab
- Two-speed Motor
- Optional Simple Canopy
- Loader Arm
- Engine: **Standard Configuration** — Xinchai 3B11 (18.5 kW);
Optional — Kubota D1105 (18.2 kW) / Kubota V1505 (18.2 kW) / Perkins 304J-11 (18.4 kW)

KEY SPECIFICATIONS

Lifting capacity	800 kg
Engine Power	18.5KW
Hydraulic Flow	42 L/min



CLOSED VARIABLE PISTON PUMP

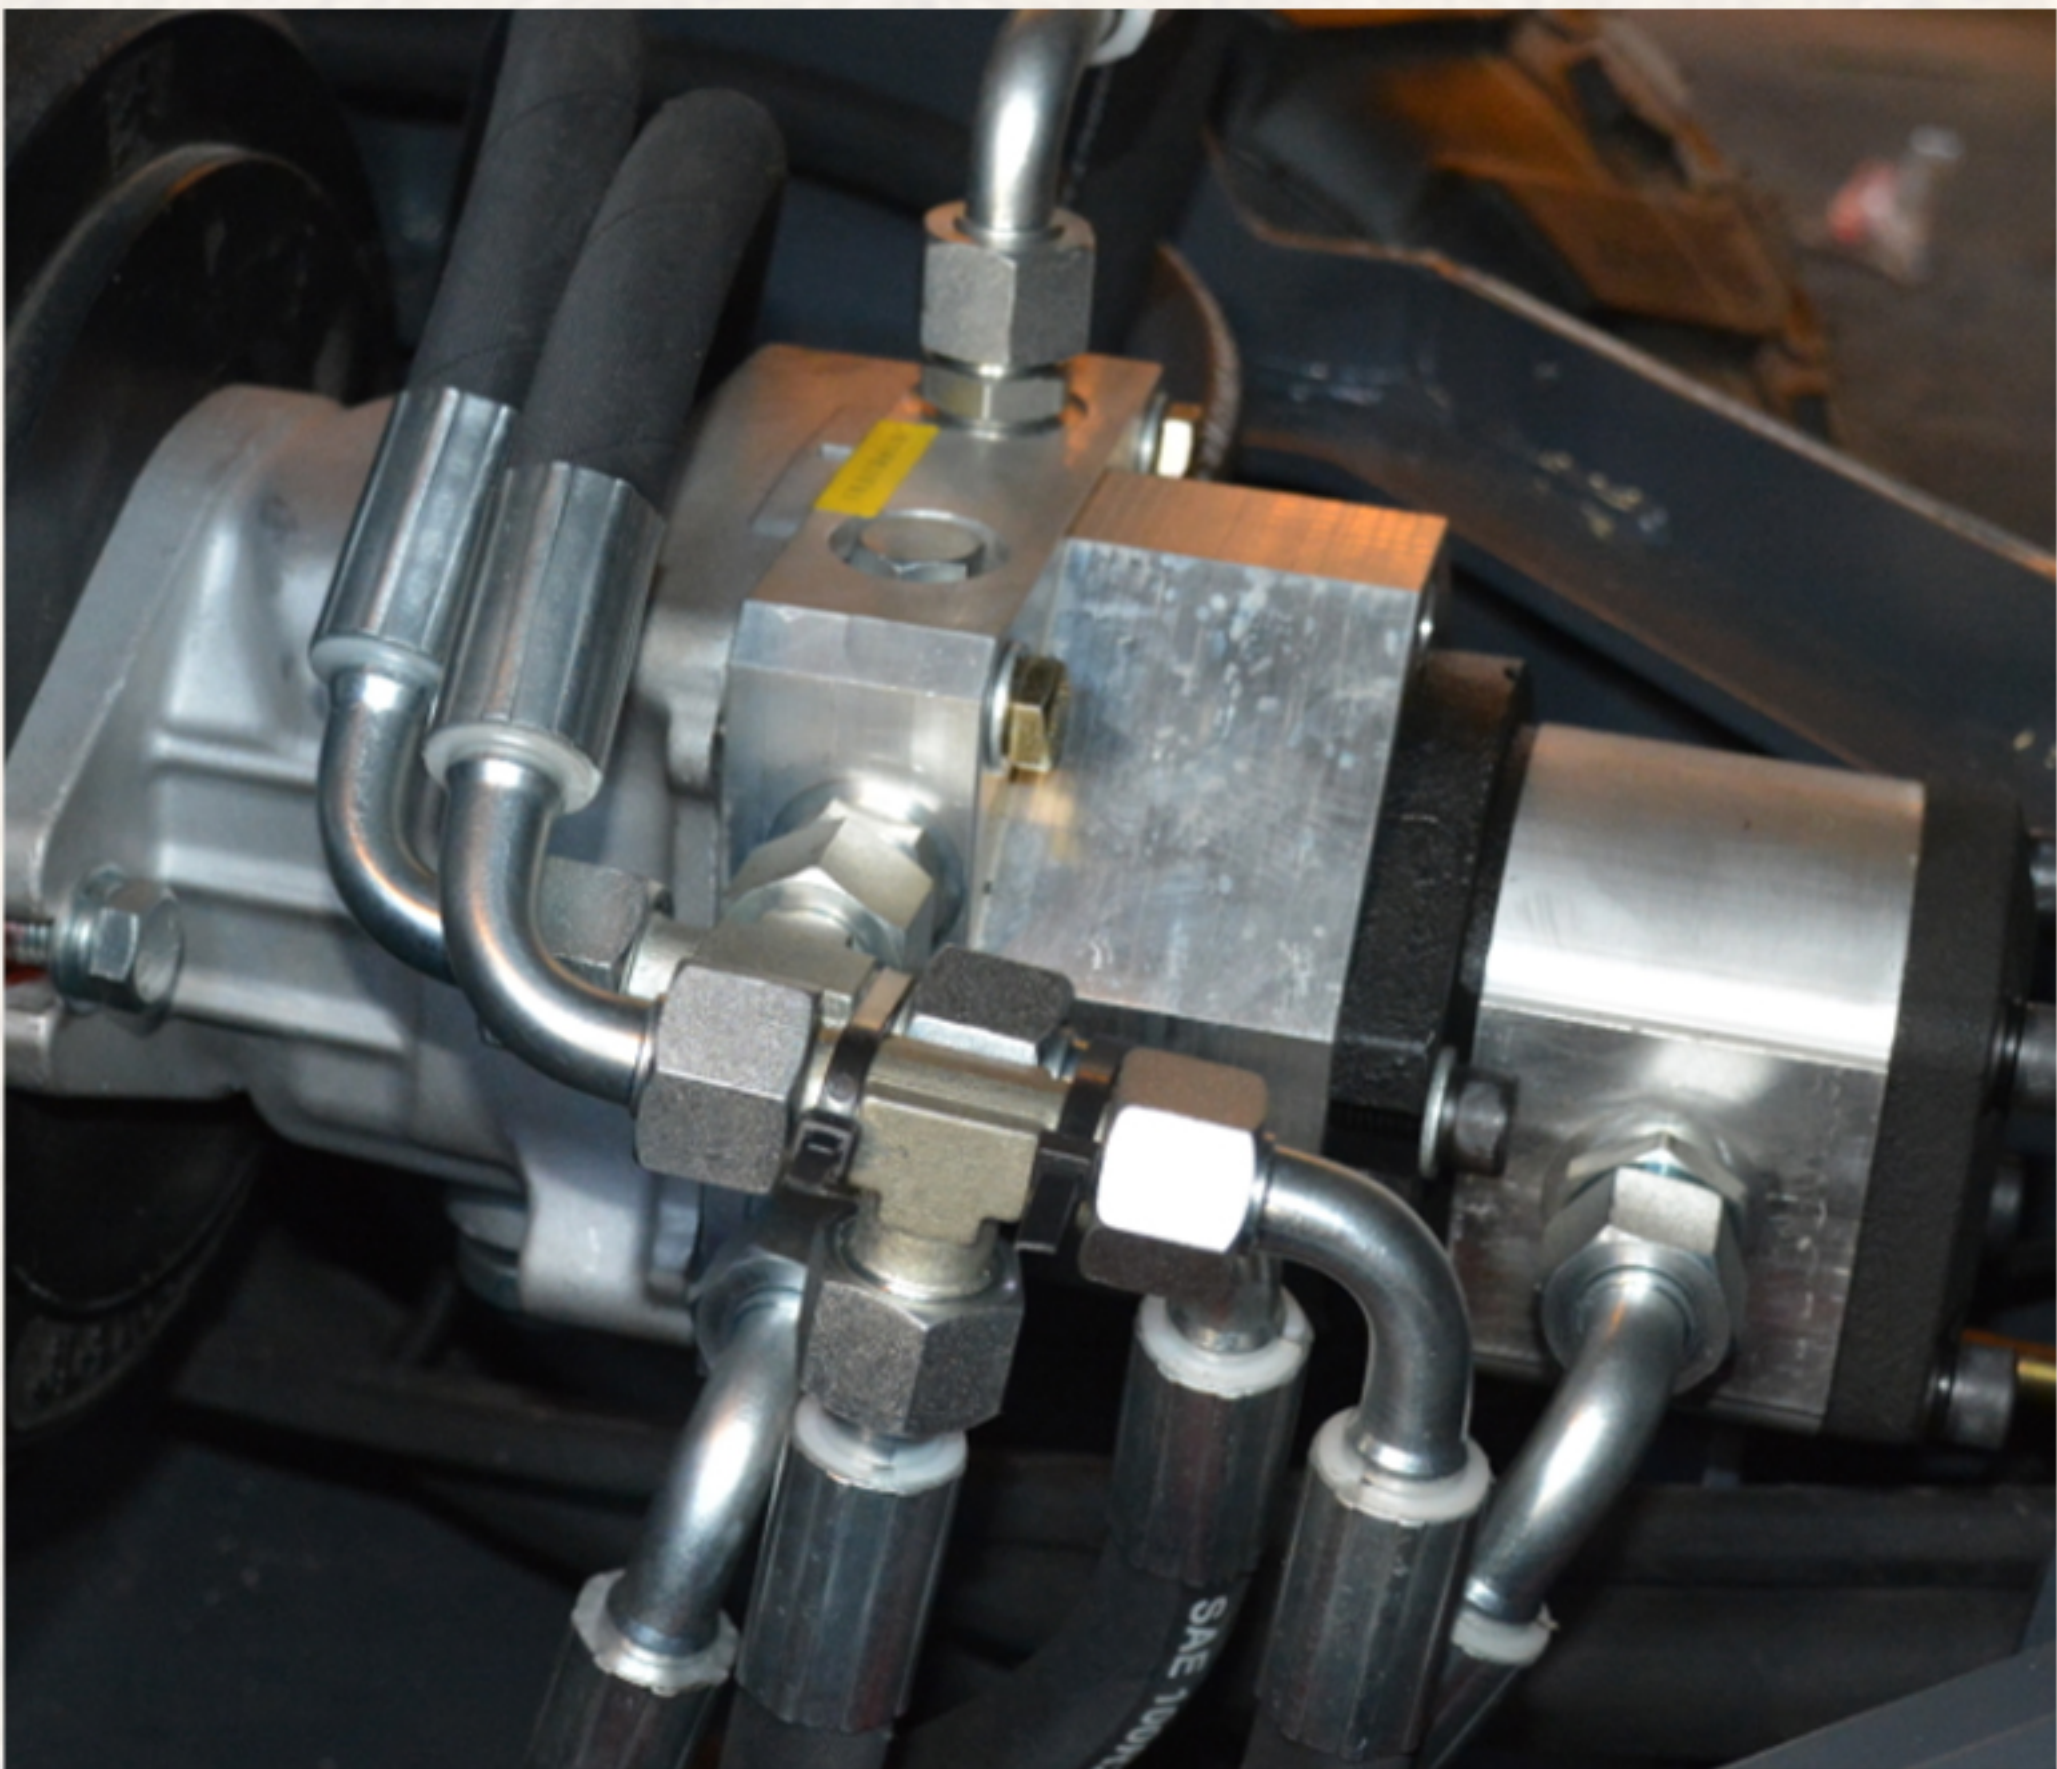

HYDROSTATIC SYSTEM



NEW-TYPE 3-CYLINDER DIESEL ENGINE



The new 3-cylinder diesel engine features a compact design and, combined with the flexible layout of the hydrostatic system, optimizes overall machine space while delivering strong and stable power output with reduced maintenance costs.

* Different engine options are available, and the corresponding power output will vary accordingly.

KEY FEATURES




QUICK ATTACHMENT CHANGE

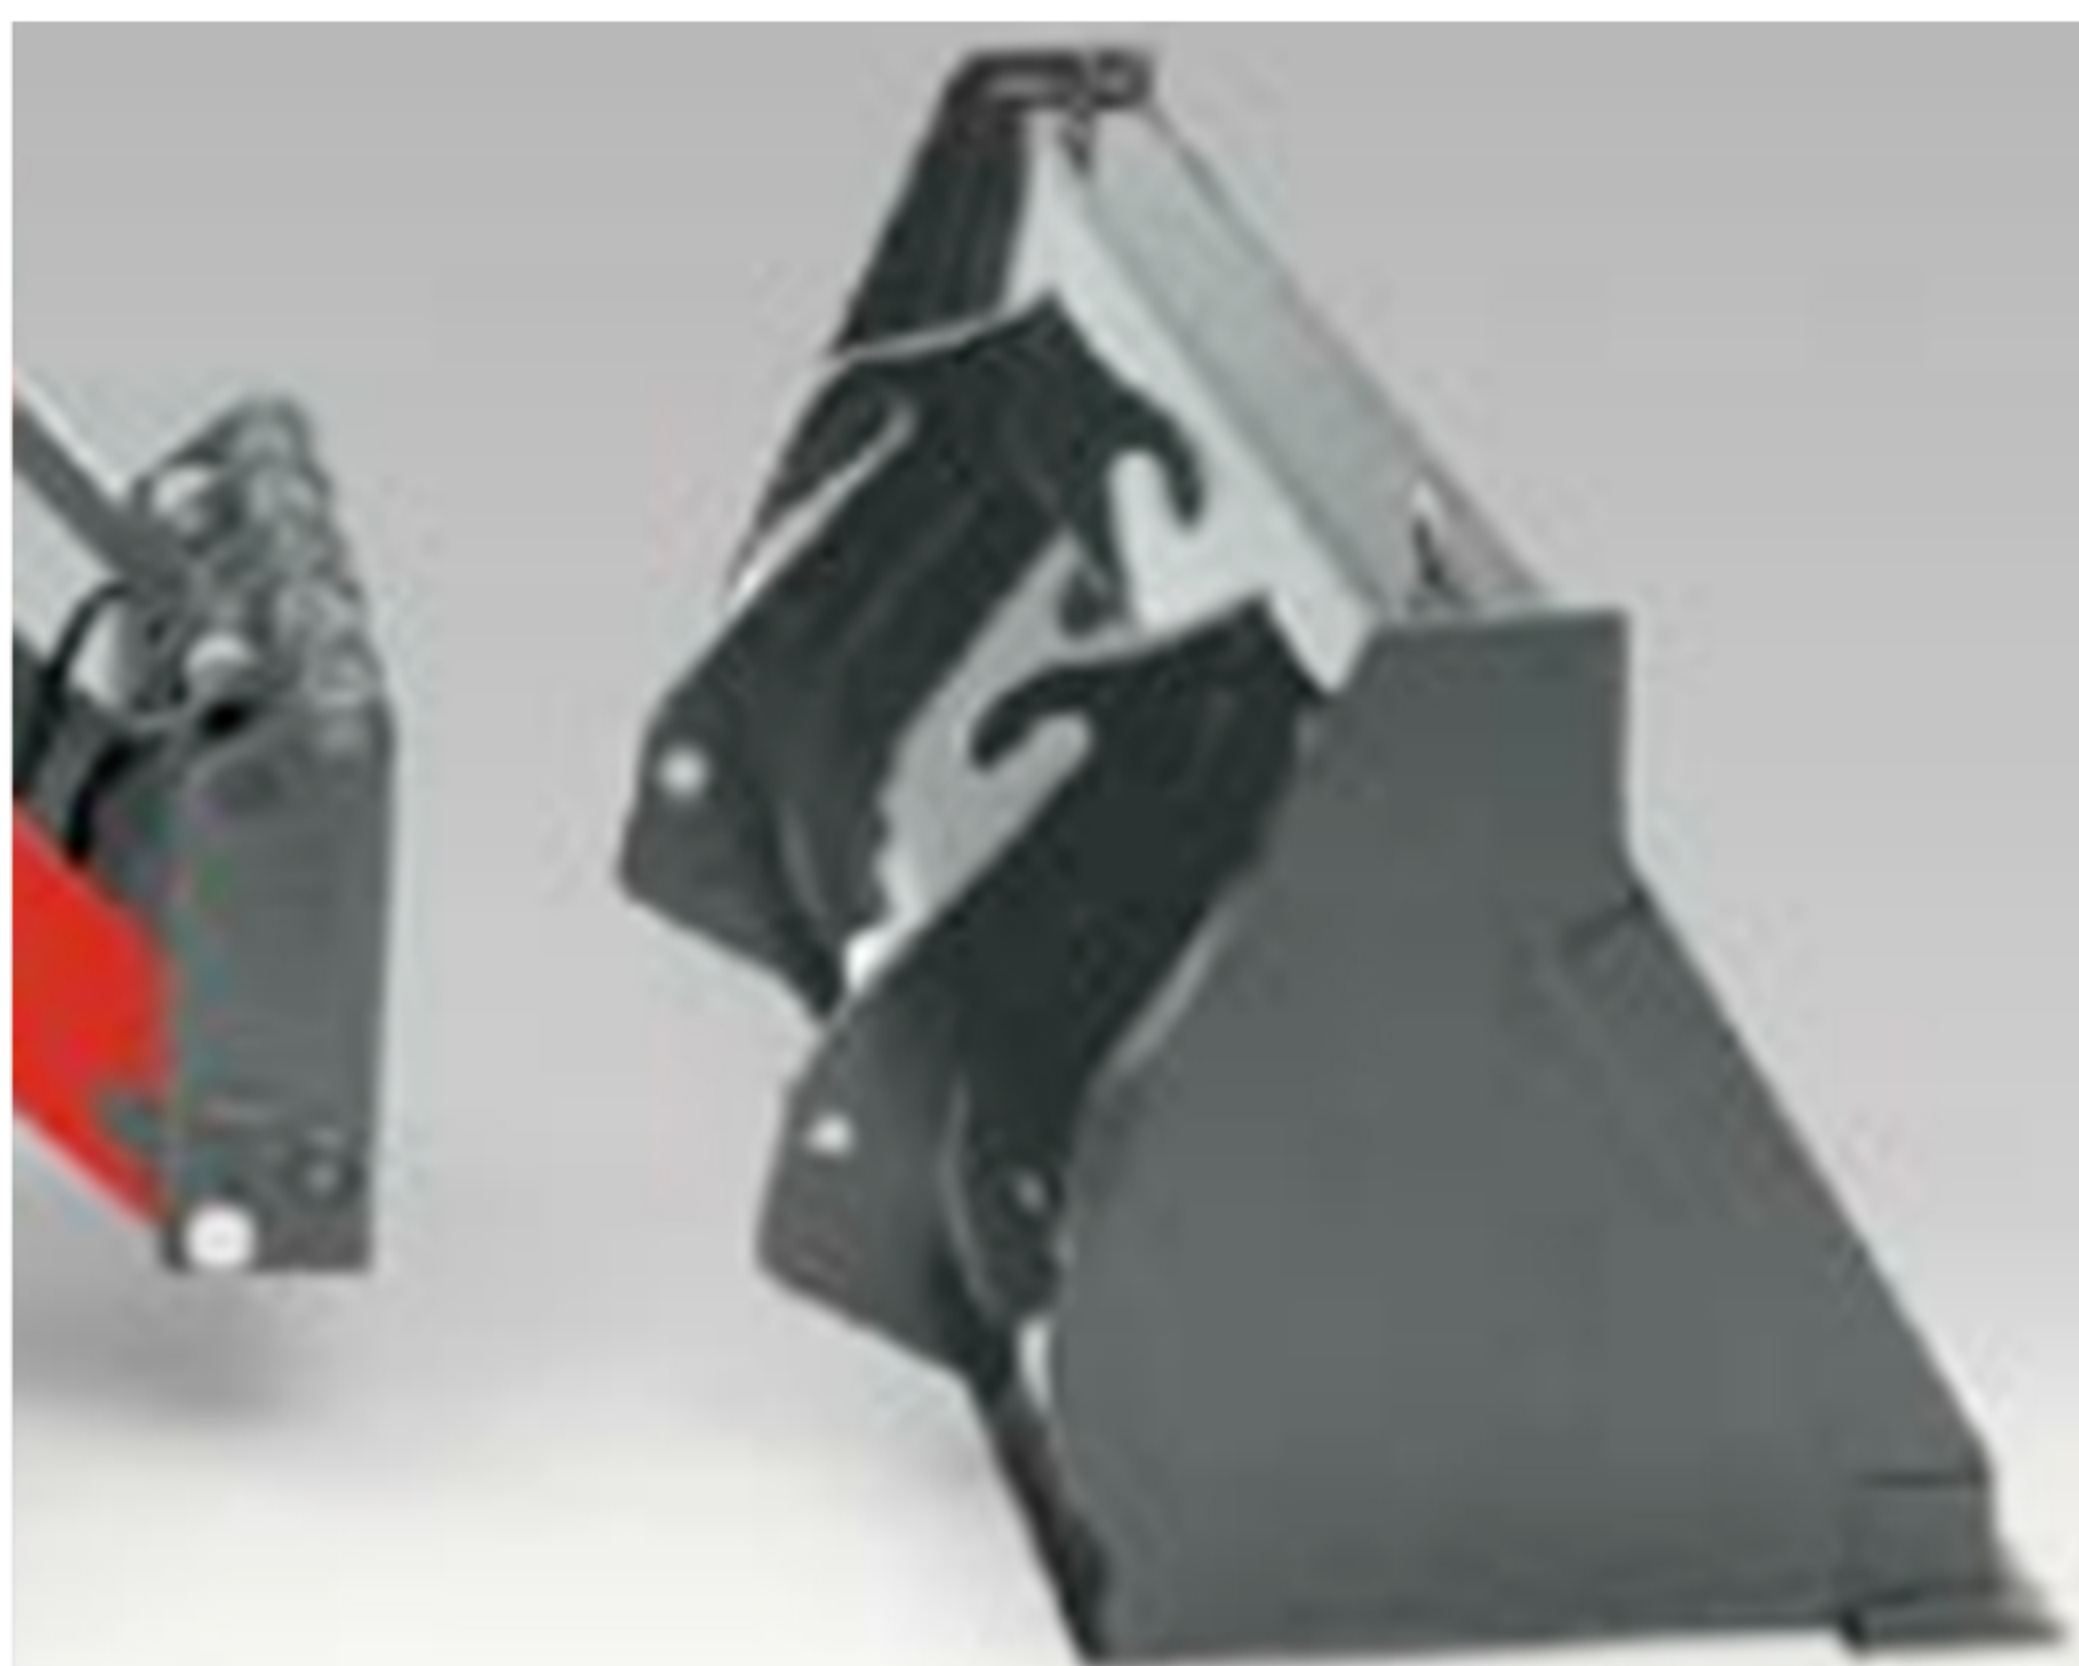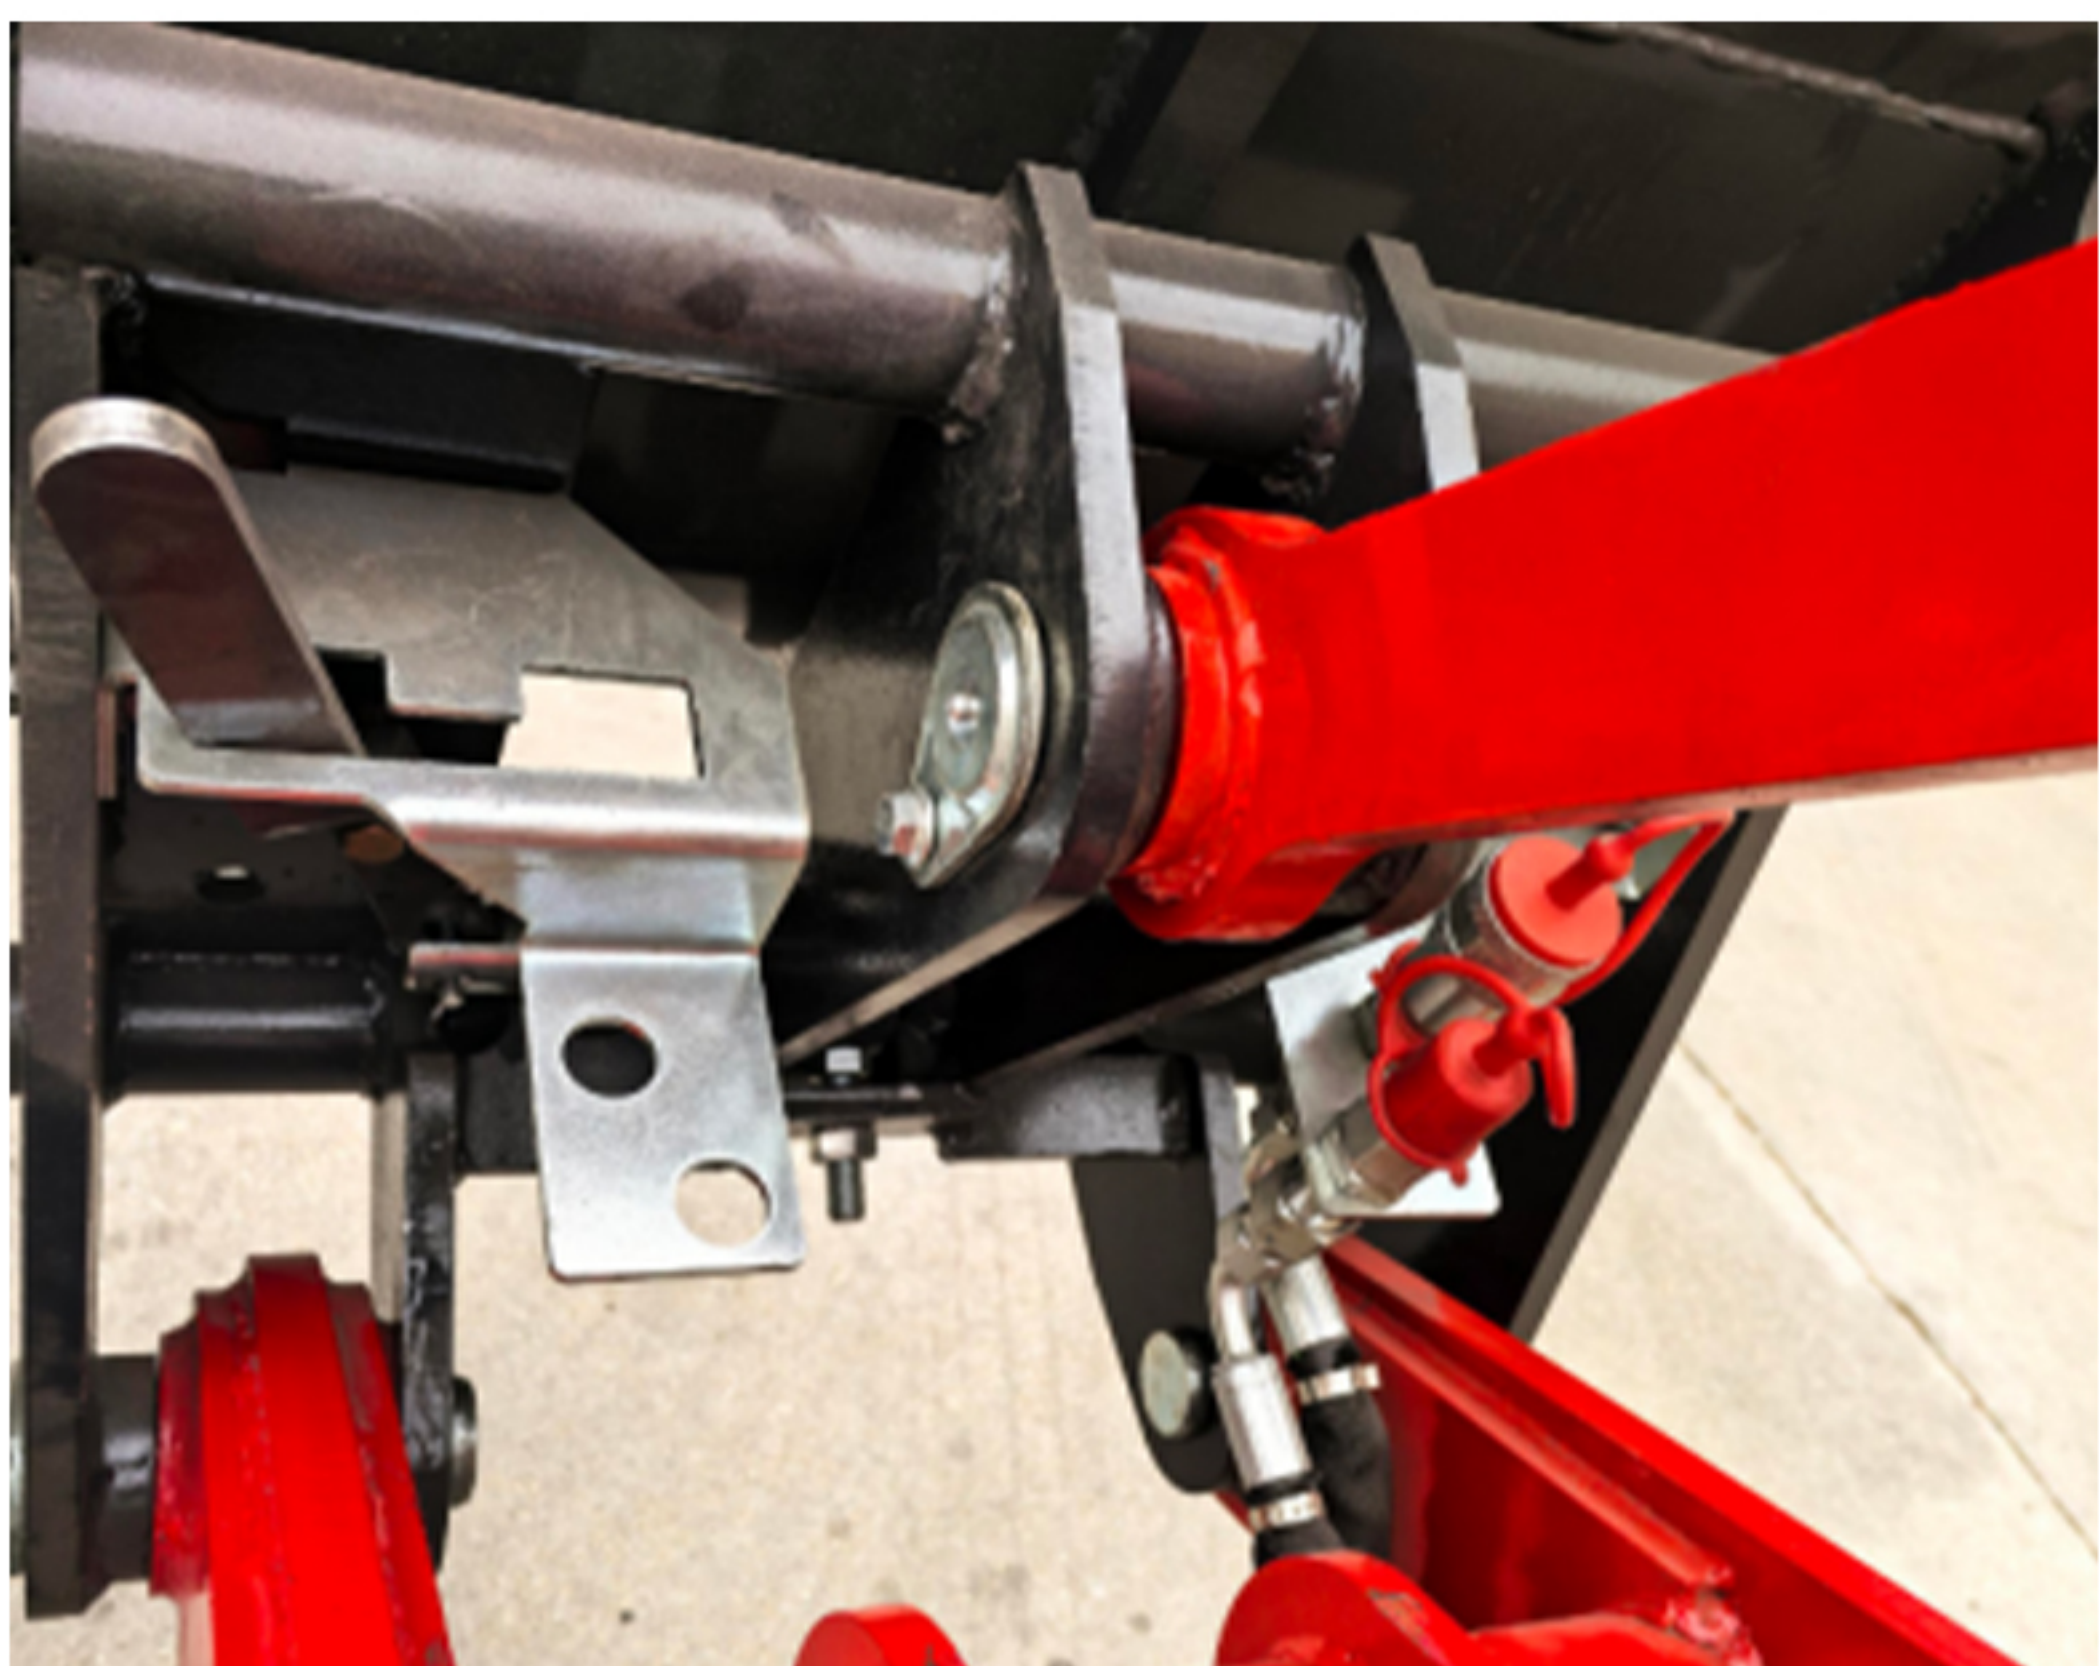

Quick and efficient attachment change / Standard mechanical quick coupler / Optional hydraulic quick coupler

MINIMUM TURNING RADIUS

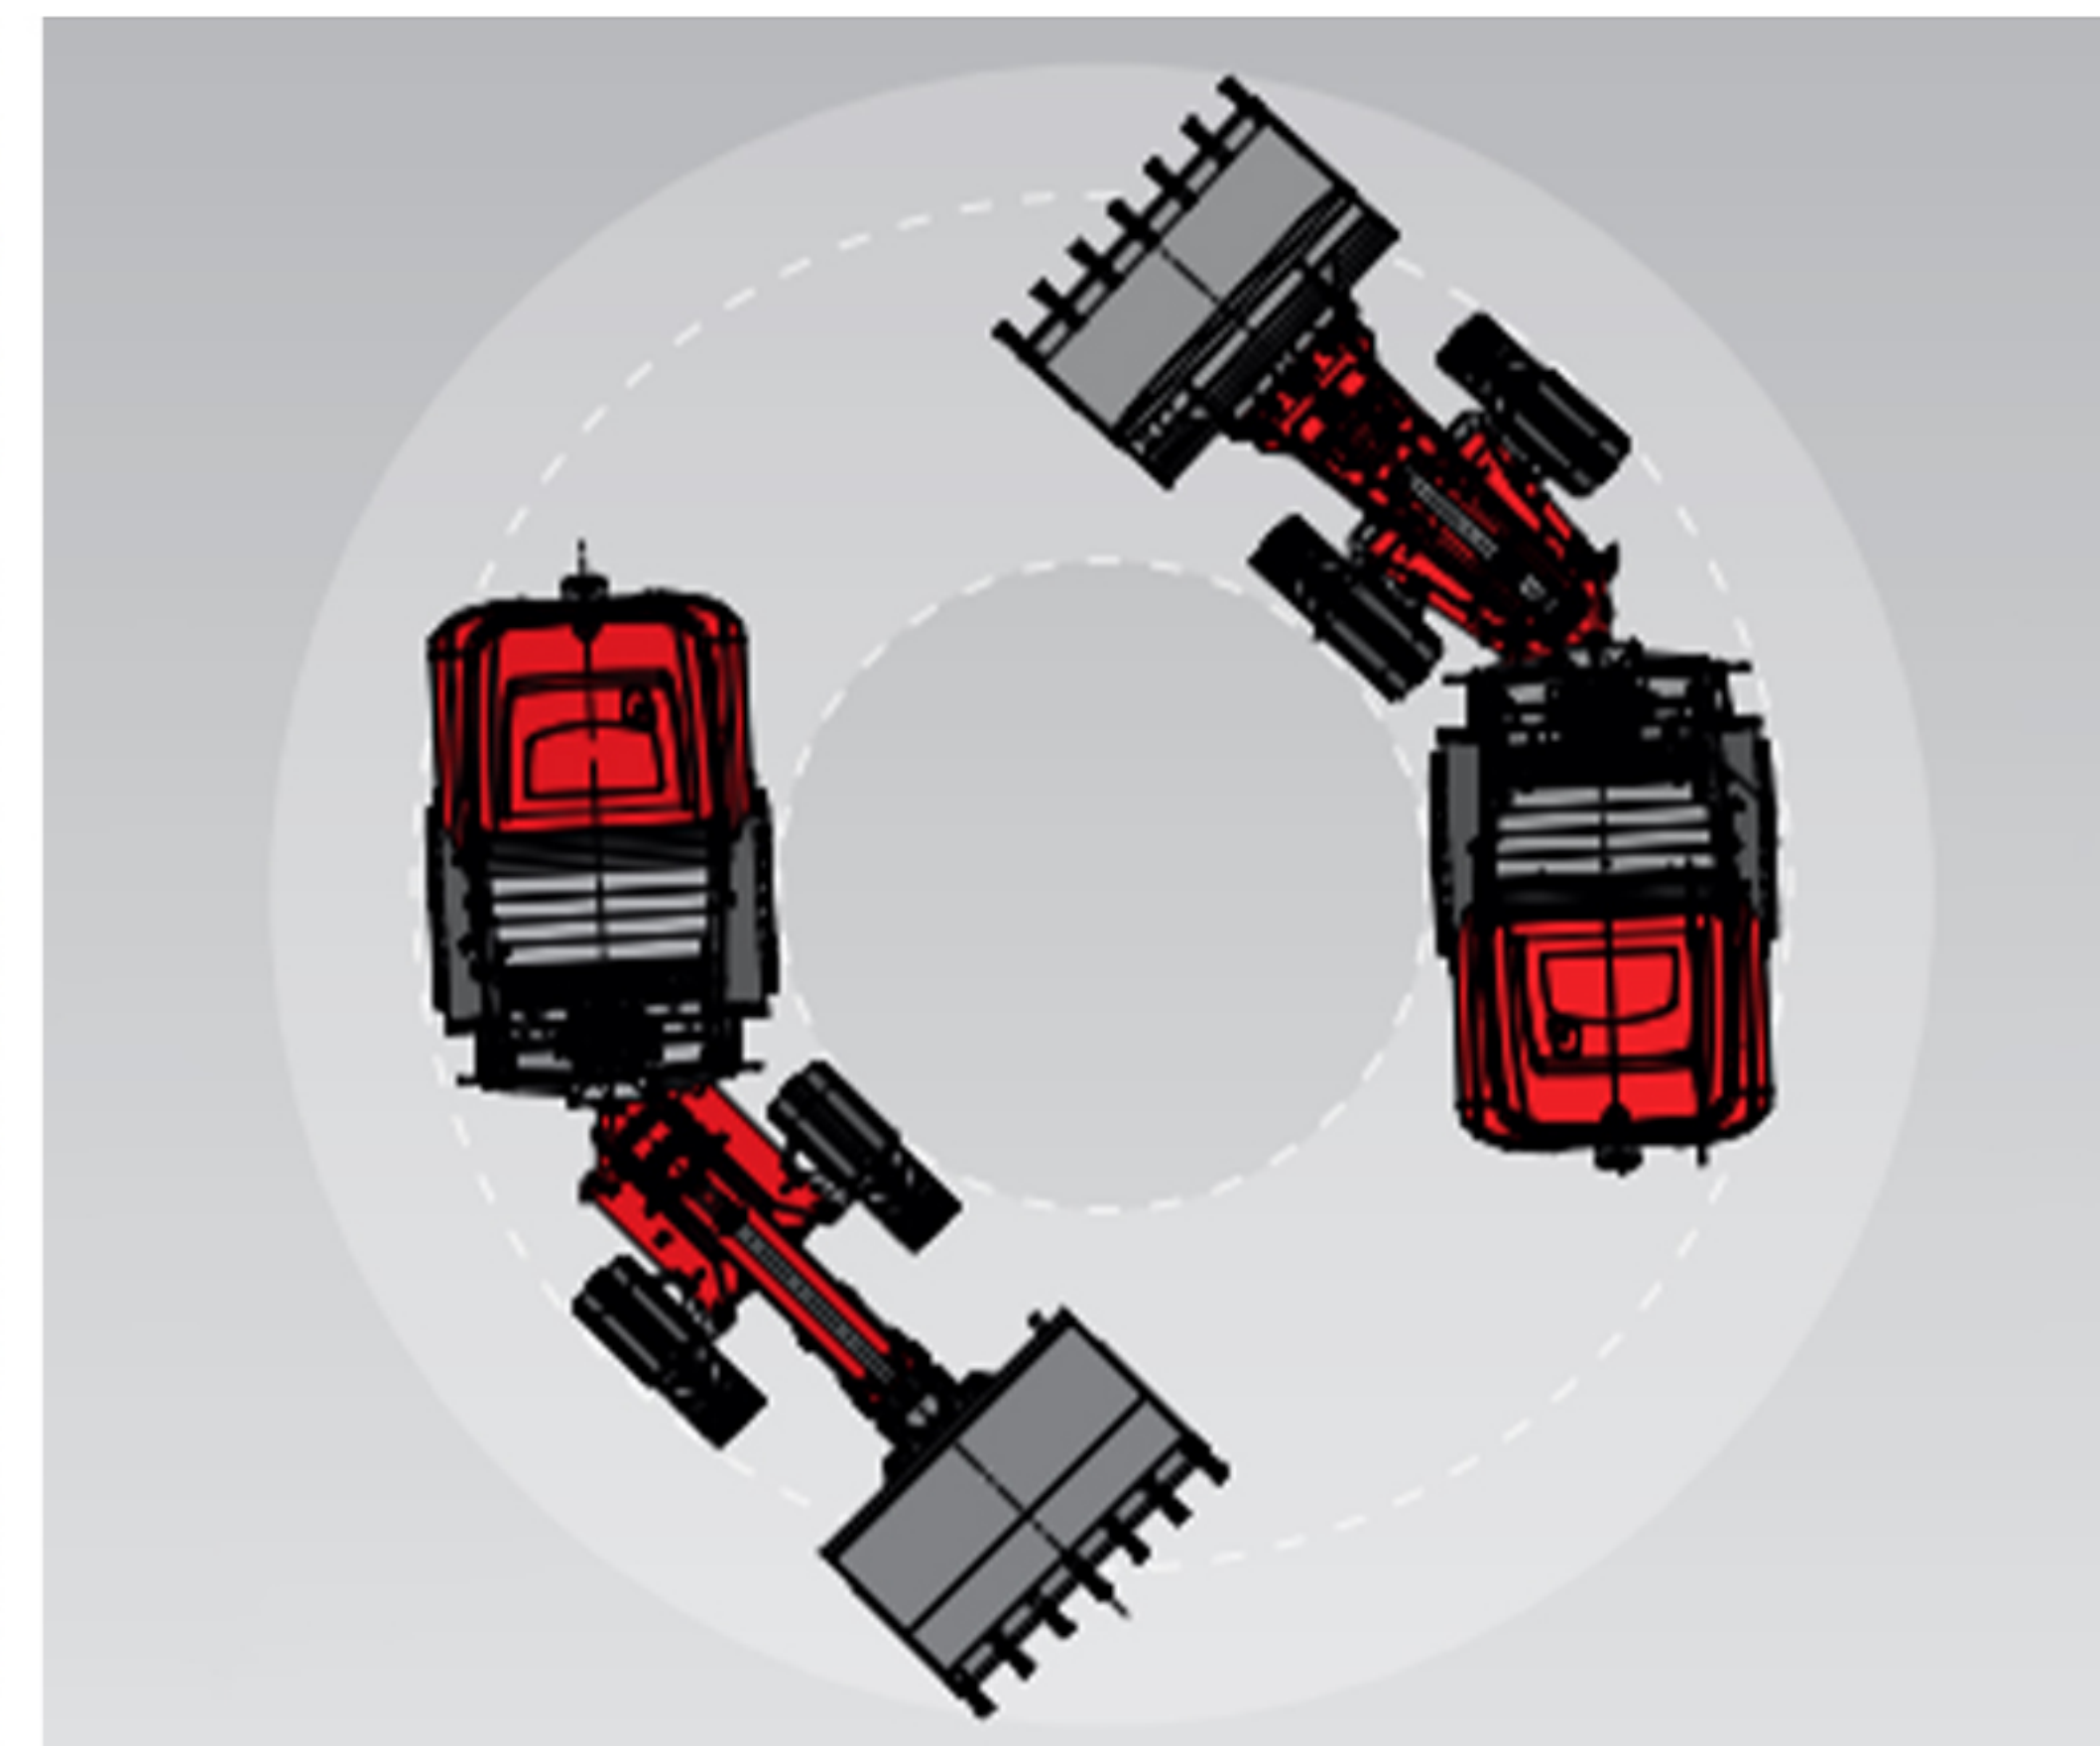

This is a highly maneuverable and precise machine, especially suitable for operation in confined spaces, such as warehouses and storage facilities.

MAIN COMPONENTS



- **PRECISION WHEEL LOADER WITH OPTIONAL STANDARD OR TELESCOPIC ARM – VERSATILE AND HIGHLY MANEUVERABLE.**




■ **BALL HEAD LINK**

Maintenance-free, resistant to wear, and designed for longer service life.



■ **DUAL MOTOR FOUR-WHEEL DRIVE**

Flexible and efficient — engineered for high-speed and high-torque applications with superior cumulative speed and torque performance.

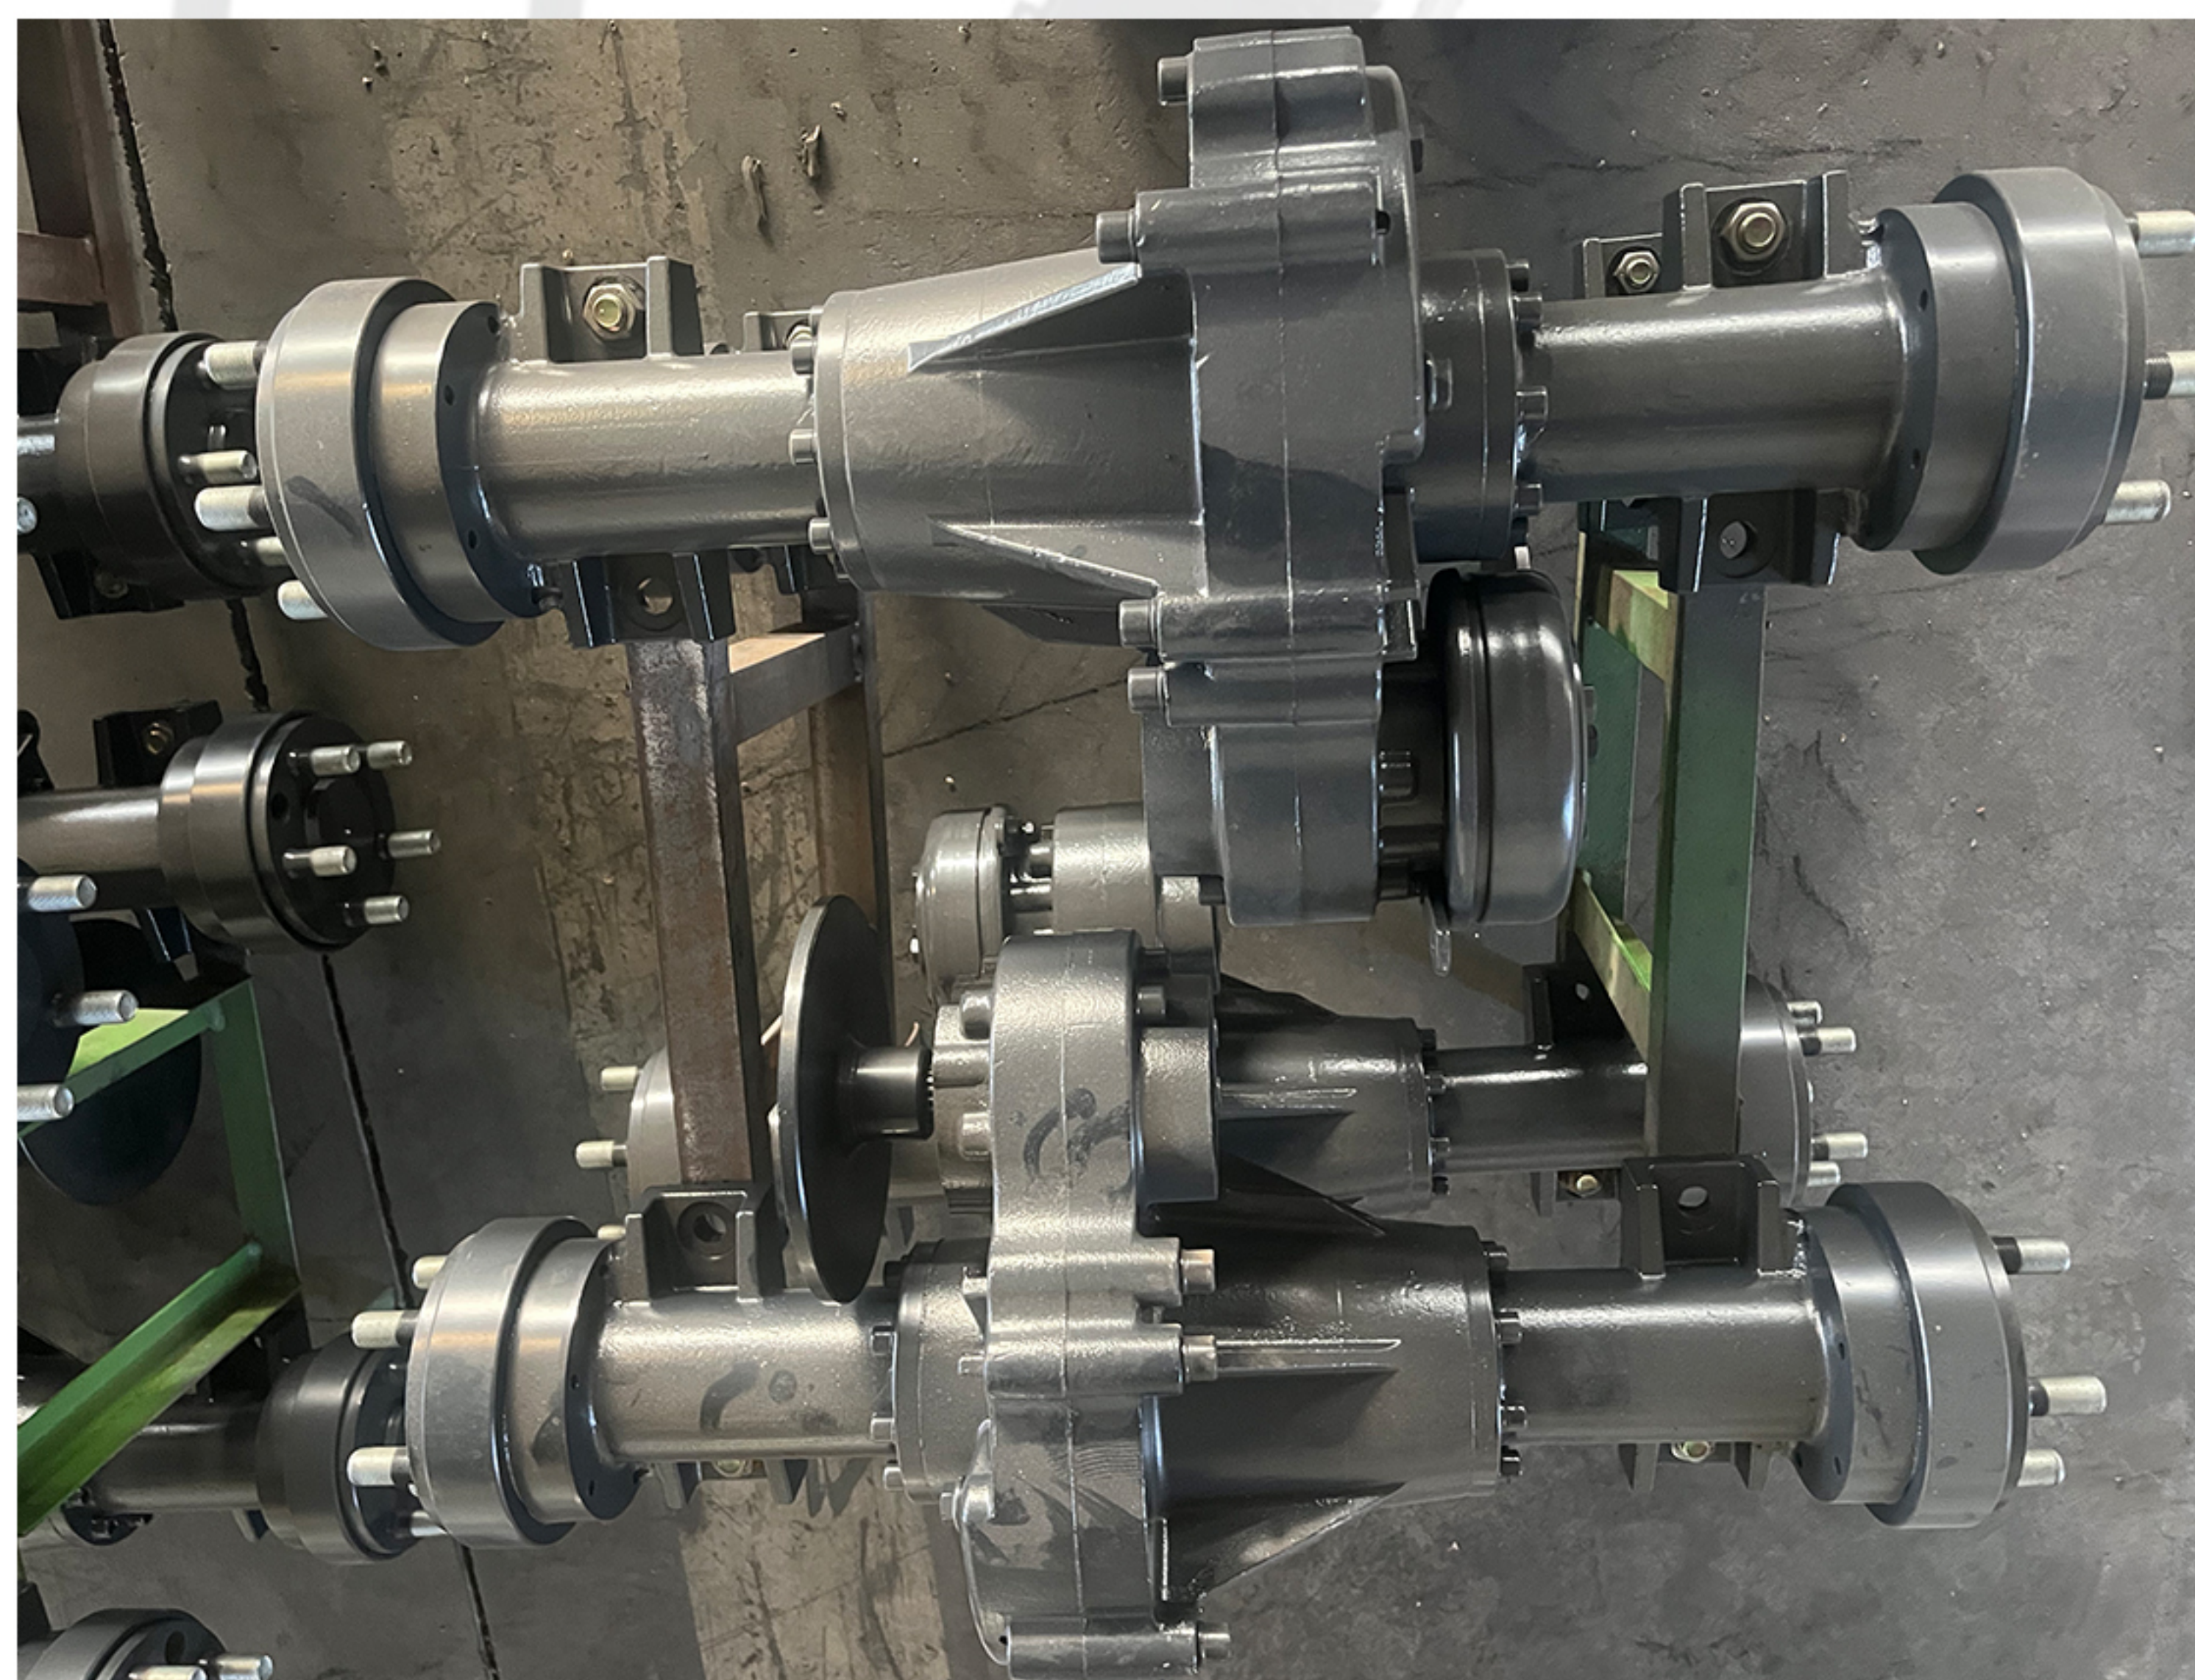

■ **HYDROSTATIC AXLE**

The hydrostatic axle enables smooth power transmission and stepless speed control through the hydraulic system.

MECHANICAL DESIGN



JOYSTICK

Ergonomic joystick for easy, one-hand operation. Simple and comfortable to use.




SEAT

Ergonomically designed, adjustable operator seat with integrated control panel and armrests for optimal comfort and ease of operation.



ADJUSTABLE STEERING COLUMN

Adjustable steering column allows the cabin to be tailored for optimal operator comfort and space.

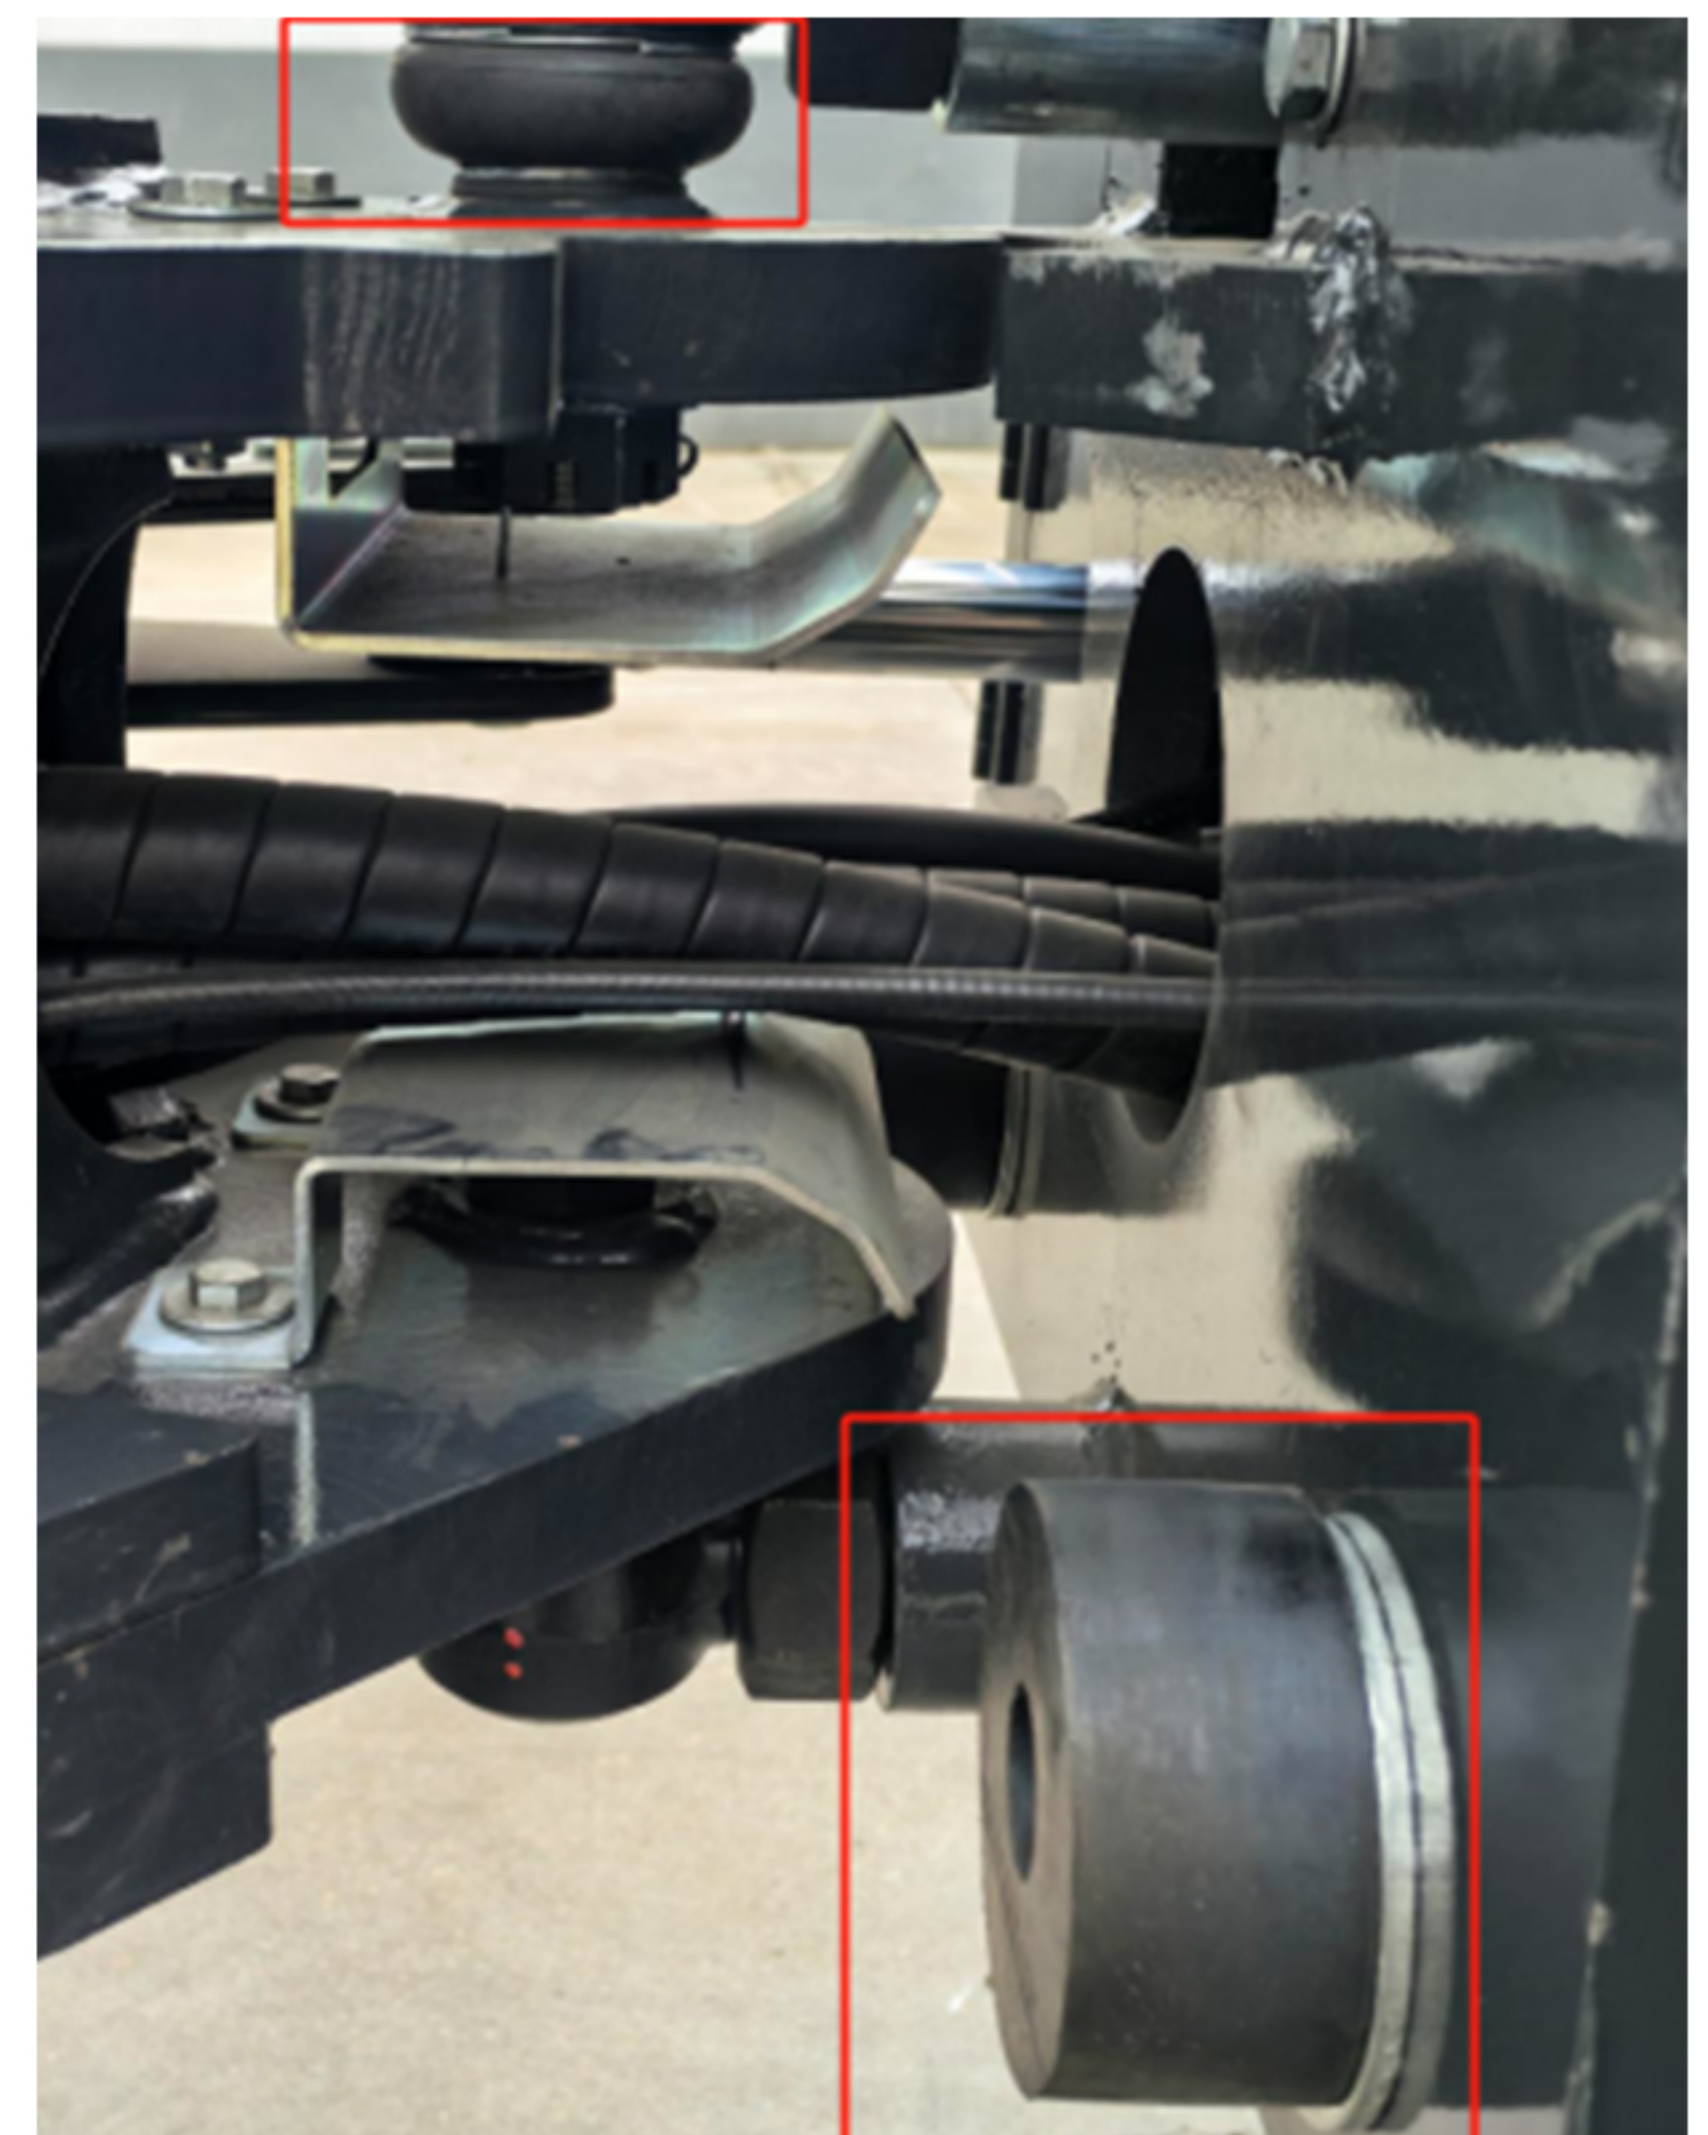

VIBRATION-DAMPED OPERATOR AREA

Absorbs vibrations and shocks for operator comfort, enabling longer, more relaxed, and focused work.



VERSATILE EQUIPMENT

Key Features: Telescopic main arm with hydraulic system for higher lift and dump.

Options: Independent configuration of high/low-speed travel motors, cab, and hydraulic system.

TECHNICAL SPECIFICATIONS

ZL918 HYDROSTATIC TELESCOPIC LOADER DIMENSIONS

Rated Load	800kg	A	Overall Length	4430mm
Maximum Boom Load	1000kg	B	Pedal Width (Between Wheels)	1620mm
Maximum Load at Boom Extension	600kg	C	Maximum Digging Depth	120mm
Net Weight	2100kg	D	Minimum Bucket Angle	51°
Articulation Angle	45°	E	Maximum Dumping Height (Before Extension)	2215mm
Gradeability	30%	F	Maximum Dumping Height (After Extension)	2825mm
Hydraulic Tank Capacity	30L	G	Maximum Bucket Height (Fully Retracted)	4035mm
Diesel Tank Capacity	30L	H	Maximum Bucket Angle (Fully Retracted)	51°
Maximum Travel Speed	12km/h	I	Safe Dumping Distance (After Extension)	1350mm
		J	Overall Wheel Width	1320mm
		K	Maximum Dumping Angle	31°
		L	Safe Dumping Distance (Before Extension)	830mm
		M	Minimum Ground Clearance	242mm

