Battery Shipment Authorized for International Ocean Transport To/From US Packing Instruction P903

Customer Defined Shipment Specifications


Watt-hour rating is > 20 Wh/cell or > 100 Wh/battery

Lithium Ion

Packaging Requirements

- Cells and batteries protected to prevent short circuits, movement, and accidental activation
- Inner packagings that completely enclose the cell or battery
- Completed packagings must meet Packing Group II standards, except:
 - Lithium batteries that weigh 12 kg (26.5 pounds) or more and have a strong, impact-resistant outer casing may be placed in strong outer packagings; protective enclosures; or on pallets or other handling devices instead of UN performance packaging

Marking and Labeling Requirements

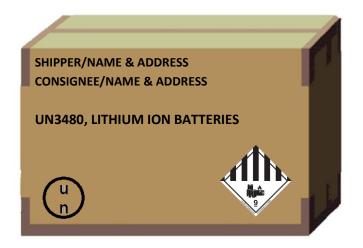

| UN3480, LITHIUM | UNID, Proper Shipping | | |
|-----------------|---|--|--|
| ION BATTERIES | Name | | |
| un | Appropriate UN Certification marking | | |
| | Class 9 Lithium Battery label | | |

Battery Shipment Authorized for International Ocean Transport To/From US Packing Instruction P903

UN3480

Documentation Requirements

- 1. Include document (any form) with the following information:
 - Contains all of the information required by the IMDG code
 - Emergency response information required as per 49 CFR, Subpart G of Part 172
- 2. Additional emergency response information or documentation may be required as per carrier(s)

| Vessel/Flight & Date 11 Port/Place Handling | | 9 Additional Handling Information | | |
|---|---|-----------------------------------|---------|-----------|
| 12 Port/Place of Discharge | 1s Destination | | | |
| | lackages, Description of Goods ium Ion Batteries, 9, F-A, | NW 5 kg | GW (kg) | CUBE (m/) |

