

Battery Shipments Authorized for International Ocean Transport to/from US

Packing Instruction P903

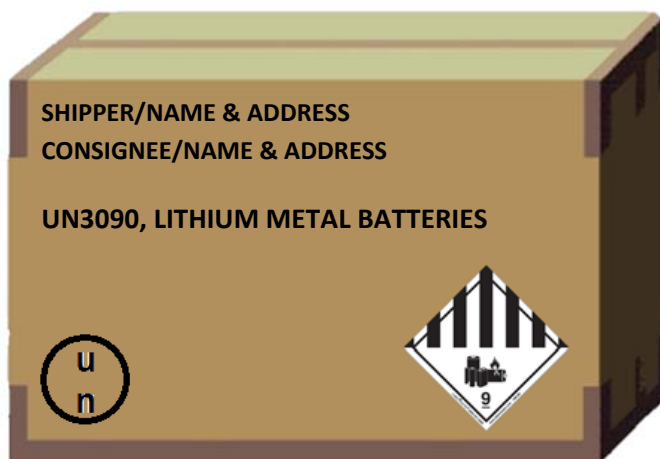
Customer Defined Shipment Specifications



- Lithium content is ≤ 1 g/cell or ≤ 2 g/battery
- The gross weight of the package exceeds 30 kg (66 lbs.)

Packaging Requirements

- Cells and batteries protected to prevent short circuits, movement, and accidental activation
- Inner packagings completely enclose the cell or battery
- Completed packagings must meet Packing Group II standards; except:
 - Lithium batteries that weigh 12 kg (26.5 pounds) or more and have a strong, impact-resistant outer casing may be packed in strong outer packagings; protective enclosures; or on pallets or other handling devices, instead of UN performance packaging

Marking and Labeling Requirements



UN3090, LITHIUM METAL BATTERIES	UNID, Proper Shipping Name
	Appropriate UN Certification marking
	Class 9 Lithium Battery label

Lithium Metal**Fully Regulated****UN3090****Standalone**

Battery Shipments Authorized for International Ocean Transport to/from US

Packing Instruction P903

Documentation Requirements

1. Include document (any form) with the following information:
 - Contains all of the information required by the IMDG code
 - Emergency response information required as per 49 CFR, Subpart G of Part 172
2. Additional emergency response information or documentation may be required as per carrier(s)

10 Vessel/Flight & Date	11 Port/Place Handling	9 Additional Handling Information 24 Hour Emergency Contact Name: XXXXX 24 Hour Emergency Contact Number: xxx-xxx-xxxx		
12 Port/Place of Discharge	13 Destination			
14 Shipping Marks 1 box	*Number & Kind of Packages, Description of Goods UN3090, Lithium Metal Batteries, 9, F-A, S-I	NW	GW (kg) 35 kg G	CUBE (m³)