

AQUAPELLE

MICROFIBER · LEATHER · AUTOMOTIVE


PRODUCT DESCRIPTION

A high-spec synthetic material designed to emulate the smooth texture and high-end aesthetics of traditional Nappa animal hides.

Built from a tightly structured microfiber substrate coated with a specialized PU layer, it delivers a high-durability, sustainable alternative tailored for premium automotive upholstery. Engineered for precise coordination, the color tones seamlessly match our genuine Automotive Nappa Leather product line for mixed-material interior applications.

Setting a new industry benchmark, this product integrates built-in fire-retardant properties while maintaining the exact pliable softness of standard microfiber leather. By leveraging a waterborne microfiber base and an eco-friendly hydro-processing method, the material is manufactured entirely solvent-free. The result is a high-performance, low-VOC textile that optimizes safety, luxury, and environmental compliance.

- ECO-FRIENDLY
- FIRE RETARDANT
- LOW-VOC
- SOLVENT-FREE
- AUTOMOTIVE
- RESIDENTIAL

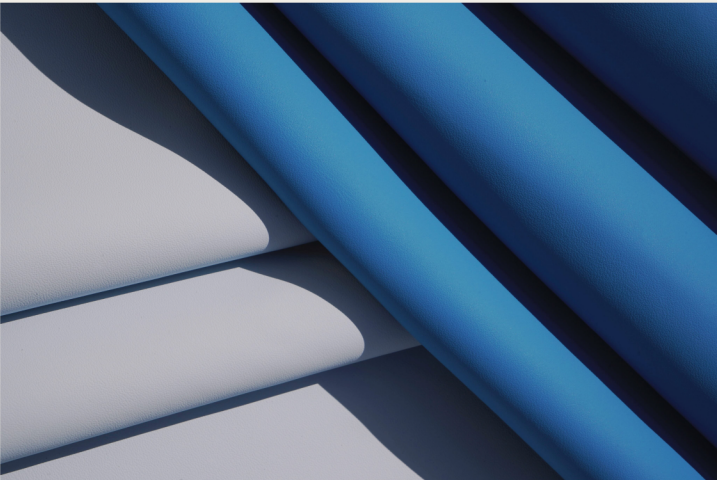

TECHNICAL SPECIFICATIONS

CHARACTERISTIC	TEST METHOD	M.U.	PERFORMANCE
Composition			Surface: 100% Polyurethane Backing: 50% Nylon 6, 50% Polyurethane
Width	ISO 22198	mm	≥1380
Thickness	ISO 2589	mm	1.2 ± 0.1
Mass per Unit Area	ISO 2286-2	g/m²	750 ± 10%
Tensile Strength – Warp	ISO 13934.1	N/5 cm	≥500
Tensile Strength – Weft	ISO 13934.1	N/5 cm	≥400
Elongation at Break – Warp	ISO 13934.1	%	/
Elongation at Break – Weft	ISO 13934.1	%	/
Tear Strength – Warp	ISO 13934.1	N	≥30
Tear Strength – Weft	ISO 13934.1	N	≥50
Peeling Strength – Warp	CFFA-3	N/5 cm	≥25
Peeling Strength – Weft	CFFA-3	N/3 cm	≥25
Scratch Resistance – Warp		cycles	≥20
Scratch Resistance – Weft		cycles	≥20
Color Fastness to Rubbing Wet Rub 100 cycles	ISO 105-X12	Grey Scale	≥ 4
Color Fastness to Rubbing Dry Rub 500 cycles	ISO 105-X12	Grey Scale	≥ 4
Color Fastness to Rubbing Alcohol Rub 20 cycles	ISO 105-X12	Grey Scale	≥ 4
Flammability	FMVSS 302	mm/min	≤100
Resistance to Flexis	ISO 5402-1	cycles	Normal temp ≥50,000
Hydrolysis Resistance	ISO 1419 Method C	weeks	≥5
Wyzenbeek Abrasion	ASTM D 4157	cycles	≥100,000

CLEANING INSTRUCTIONS

To extend the life of your AQUAPELLE fabric, act immediately by wiping up spills and cleaning ordinary dirt with mild soap and water. For deeper sanitizing, a 10:1 ratio of water to bleach solution may be used as a disinfectant. Always rinse the surface thoroughly with clean water afterward and dry completely with a soft, lint-free cloth or allow to air dry; Avoid unapproved cleaners or conditioners as they may degrade performance and void the warranty.

CAMARI IN THE WORLD

JAPAN

Room 403, 1-14-16 Kudan-kita,
Chiyoda-ku, Tokyo 102-0073

CHINA

1525 Hexing Road,
Jiaxing, Zhejiang, 314001

AUSTRALIA

L8, 185 Victoria SQ,
Adelaide, SA 5000

ITALY

Via Vincenzo Monti 8,
20123 Milan