

Comprobación de conectividad en GNS3

Proyecto de Redes: Interlink Solutions

Equipo: Protocolo Osi Osi

Fecha: 26 de julio de 2026

Herramienta: GNS3 — Routers Cisco c3725 Red base: 192.168.50.0/24


Pruebas Realizadas:

NIVEL 1 — Área Operativa

Prueba 1— Comunicación intra-departamento

Dispositivo origen → destino: Ventas PC1 → Ventas PC2

ping 192.168.50.18

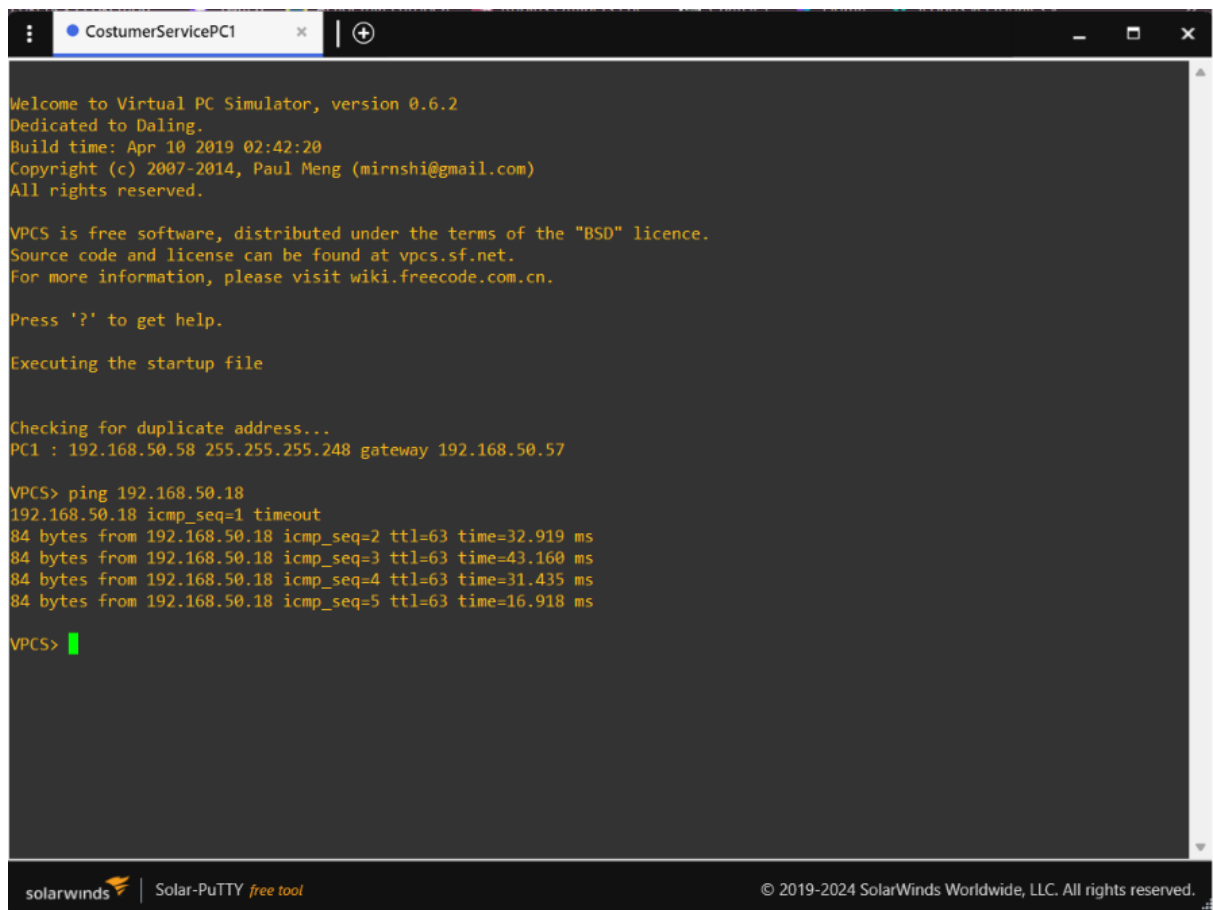

```
CostumerServicePC1 x | +
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.58 255.255.255.248 gateway 192.168.50.57


VPCS> ping 192.168.50.18
192.168.50.18 icmp_seq=1 timeout
84 bytes from 192.168.50.18 icmp_seq=2 ttl=63 time=32.919 ms
84 bytes from 192.168.50.18 icmp_seq=3 ttl=63 time=43.160 ms
84 bytes from 192.168.50.18 icmp_seq=4 ttl=63 time=31.435 ms
84 bytes from 192.168.50.18 icmp_seq=5 ttl=63 time=16.918 ms

VPCS> 
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Dispositivo origen → destino: Recepción → Ventas (solo 1 PC en Recepción)

ping 192.168.50.17

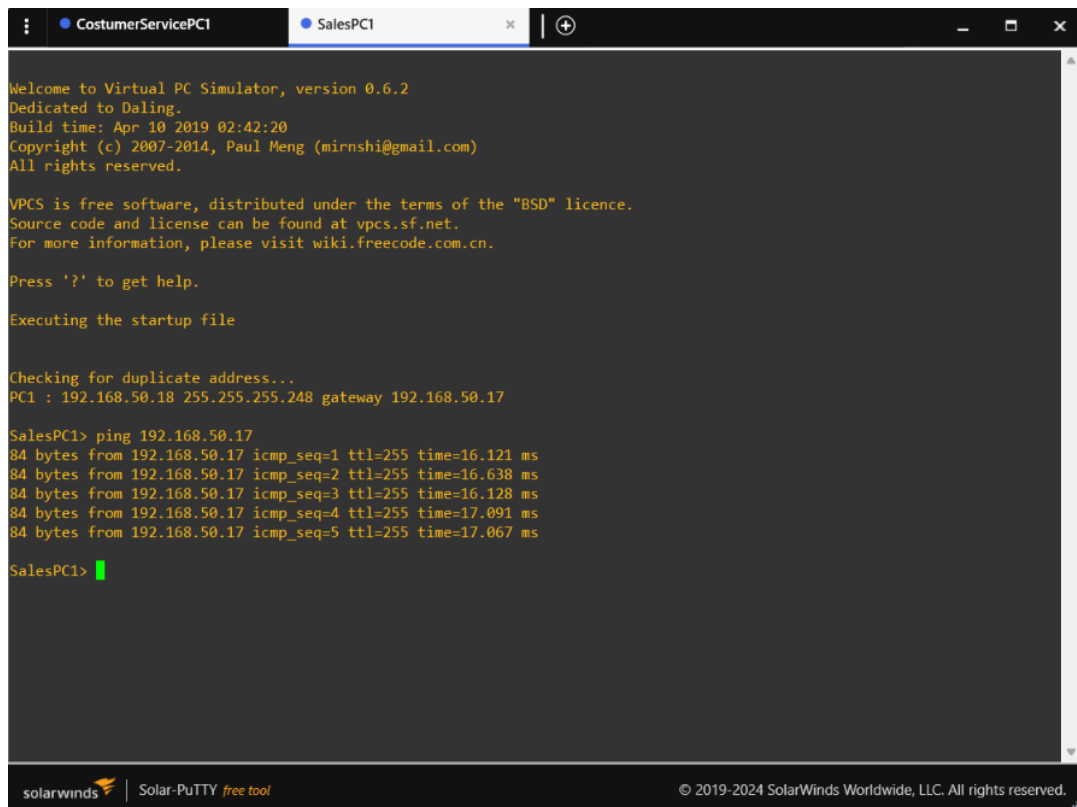

The screenshot shows a SolarWinds Solar-PuTTY terminal window with two tabs: 'CostumerServicePC1' and 'SalesPC1'. The 'SalesPC1' tab is active. The terminal output shows the VPCS startup sequence, including version 0.6.2, build time, and license information. It then displays the IP configuration for PC1: 192.168.50.18, gateway 192.168.50.17. A ping command is executed from SalesPC1 to 192.168.50.17, showing five successful responses with varying times.

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file


Checking for duplicate address...
PC1 : 192.168.50.18 255.255.255.248 gateway 192.168.50.17

SalesPC1> ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.121 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=16.638 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=16.128 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=17.091 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=17.067 ms

SalesPC1>
```

Dispositivo origen → destino: Atención al Cliente → Ventas (solo 1 PC)

ping 192.168.50.17

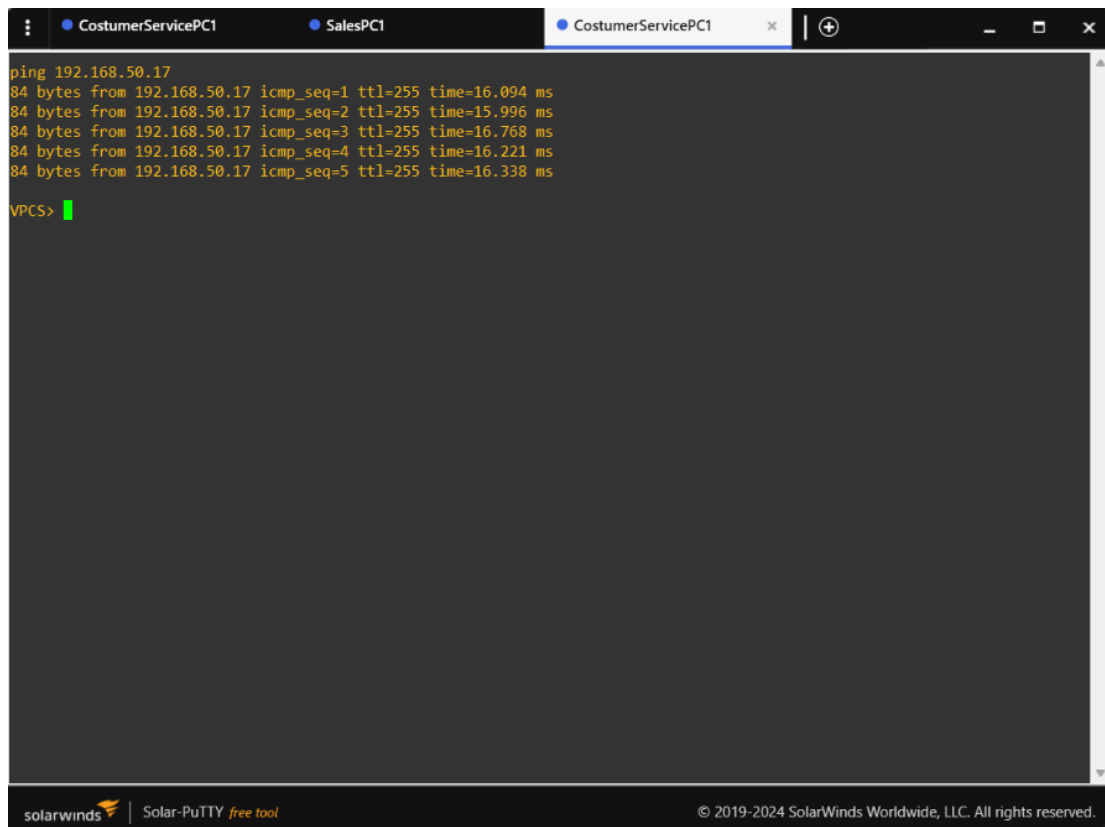

The screenshot shows a SolarWinds Solar-PuTTY terminal window with three tabs: 'CostumerServicePC1', 'SalesPC1', and 'CostumerServicePC1'. The third tab is active. The terminal output shows a ping command being executed from VPCS to 192.168.50.17, showing five successful responses with varying times.


```
ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.094 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=15.996 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=16.768 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=16.221 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=16.338 ms

VPCS>
```

Prueba 2— Comunicación entre departamentos diferentes (mismo nivel)

Dispositivo origen → destino: Ventas → Atención al Cliente

```
ping 192.168.50.57
```

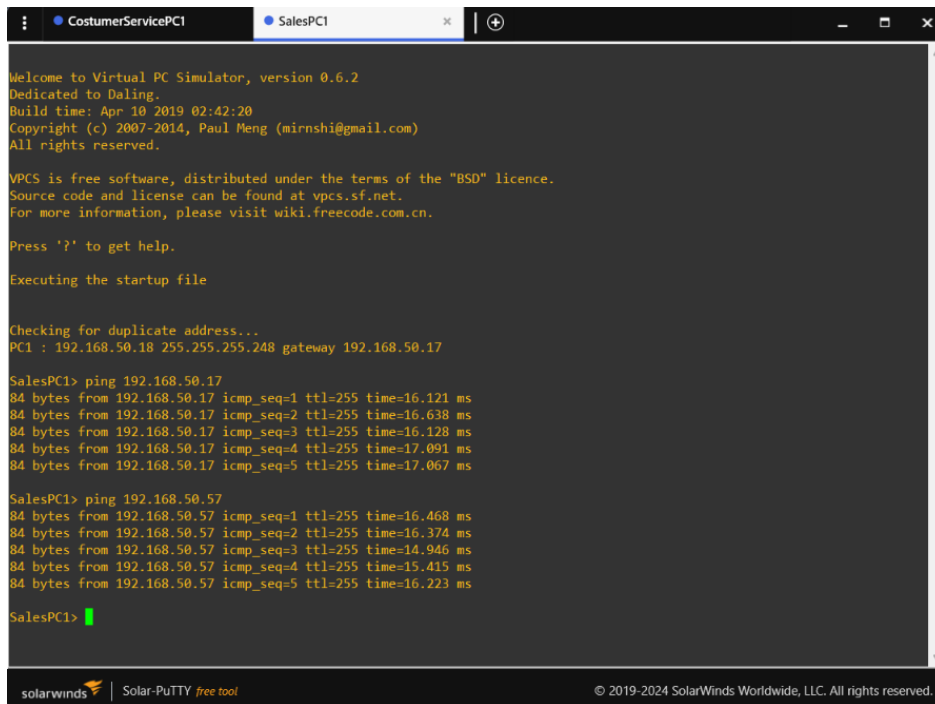

The screenshot shows a SolarWinds Solar-PuTTY terminal window with two tabs: 'CostumerServicePC1' and 'SalesPC1'. The 'SalesPC1' tab is active. The terminal output shows the following:

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.18 255.255.255.248 gateway 192.168.50.17

SalesPC1> ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.121 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=16.638 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=16.128 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=17.091 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=17.067 ms


SalesPC1> ping 192.168.50.57
84 bytes from 192.168.50.57 icmp_seq=1 ttl=255 time=16.468 ms
84 bytes from 192.168.50.57 icmp_seq=2 ttl=255 time=16.374 ms
84 bytes from 192.168.50.57 icmp_seq=3 ttl=255 time=14.946 ms
84 bytes from 192.168.50.57 icmp_seq=4 ttl=255 time=15.415 ms
84 bytes from 192.168.50.57 icmp_seq=5 ttl=255 time=16.223 ms

SalesPC1> █
```

The bottom of the window shows the SolarWinds logo and the text 'Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

Dispositivo origen → destino: Recepción → Ventas

```
ping 192.168.50.17
```

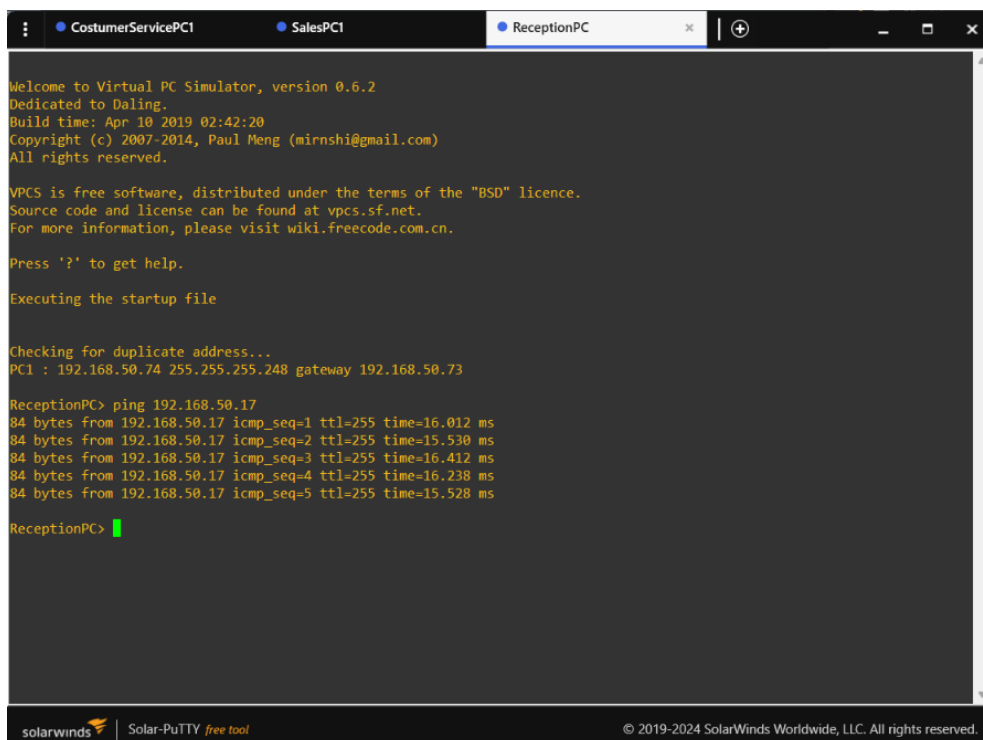

The screenshot shows a SolarWinds Solar-PuTTY terminal window with three tabs: 'CostumerServicePC1', 'SalesPC1', and 'ReceptionPC'. The 'ReceptionPC' tab is active. The terminal output shows the following:

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.74 255.255.255.248 gateway 192.168.50.73

ReceptionPC> ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.012 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=15.530 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=16.412 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=16.238 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=15.528 ms

ReceptionPC> █
```


The bottom of the window shows the SolarWinds logo and the text 'Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

NIVEL 2 — Área Administrativa

Prueba 1 — Comunicación intra-departamento

Dispositivo origen → destino: Administración PC1 → Administración PC2

```
ping 192.168.50.66
```

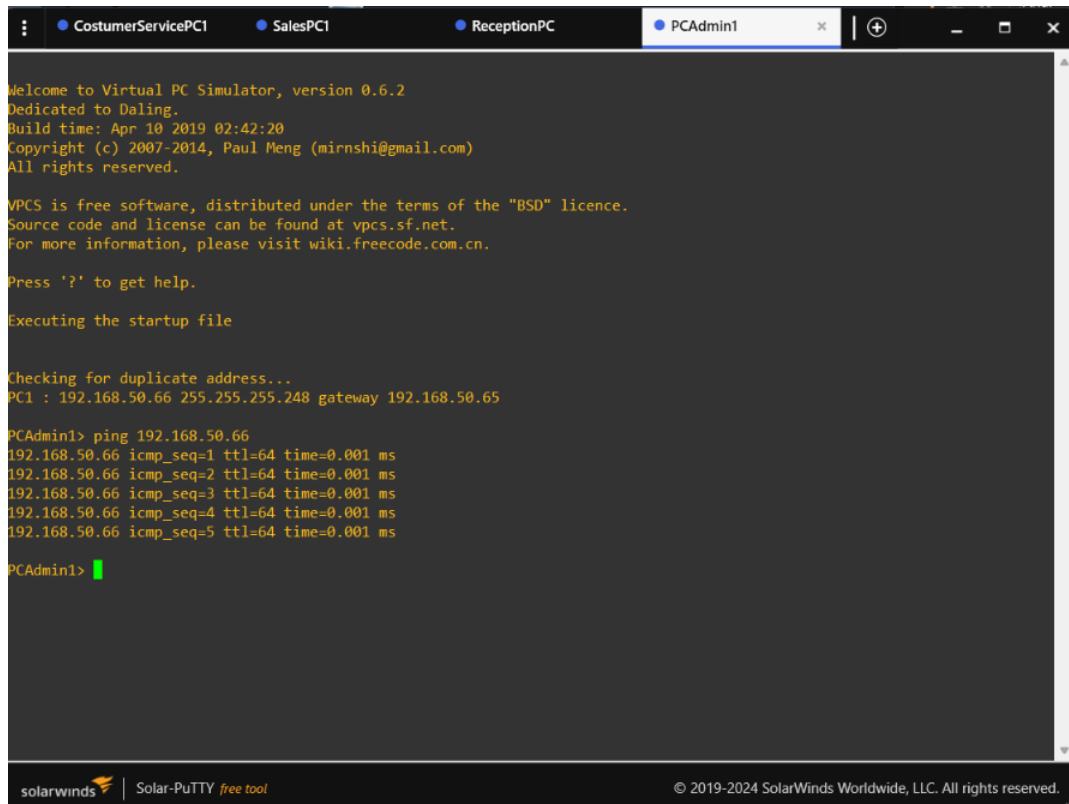

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for CostumerServicePC1, SalesPC1, ReceptionPC, and PCAdmin1. The terminal output displays the Virtual PC Simulator version 0.6.2 welcome message, followed by the execution of a startup file. It then shows the IP configuration for PC1: 192.168.50.66, 255.255.255.248 gateway 192.168.50.65. The user PCAdmin1 enters the command 'ping 192.168.50.66', and the terminal shows five successful ping responses with 0.001 ms response times. The bottom status bar indicates 'solarwinds | Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file


Checking for duplicate address...
PC1 : 192.168.50.66 255.255.255.248 gateway 192.168.50.65

PCAdmin1> ping 192.168.50.66
192.168.50.66 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=5 ttl=64 time=0.001 ms

PCAdmin1>
```

Dispositivo origen → destino: Contabilidad PC1 → Contabilidad PC2

```
ping 192.168.50.34
```

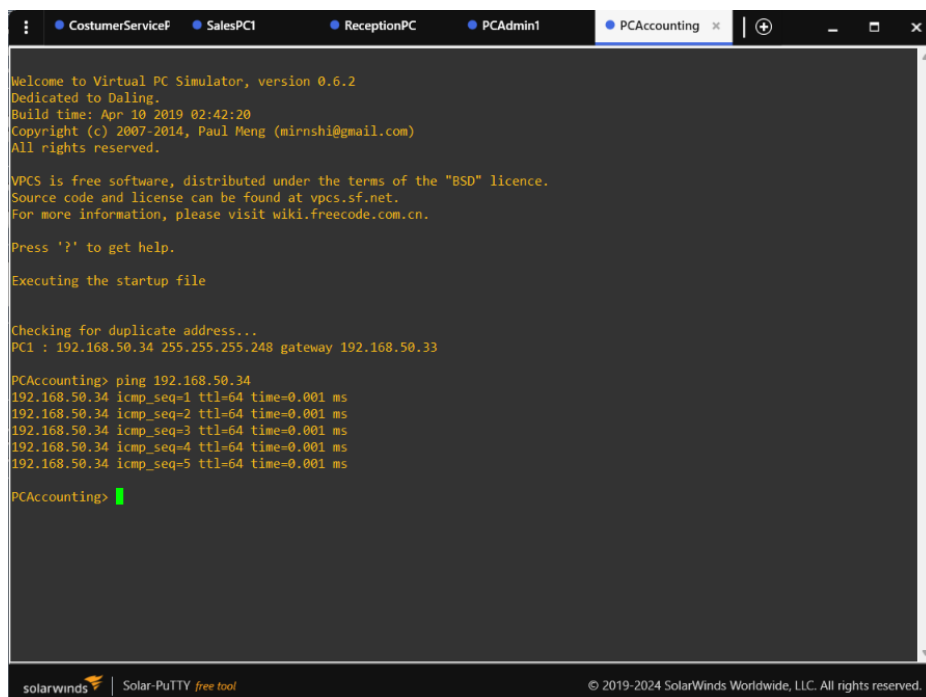

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for CostumerServicePC1, SalesPC1, ReceptionPC, PCAdmin1, and PCAccounting. The terminal output displays the Virtual PC Simulator version 0.6.2 welcome message, followed by the execution of a startup file. It then shows the IP configuration for PC1: 192.168.50.34, 255.255.255.248 gateway 192.168.50.33. The user PCAccounting enters the command 'ping 192.168.50.34', and the terminal shows five successful ping responses with 0.001 ms response times. The bottom status bar indicates 'solarwinds | Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file


Checking for duplicate address...
PC1 : 192.168.50.34 255.255.255.248 gateway 192.168.50.33

PCAccounting> ping 192.168.50.34
192.168.50.34 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=5 ttl=64 time=0.001 ms

PCAccounting>
```

Dispositivo origen → destino: Recursos Humanos PC1 → PC2

ping 192.168.50.26

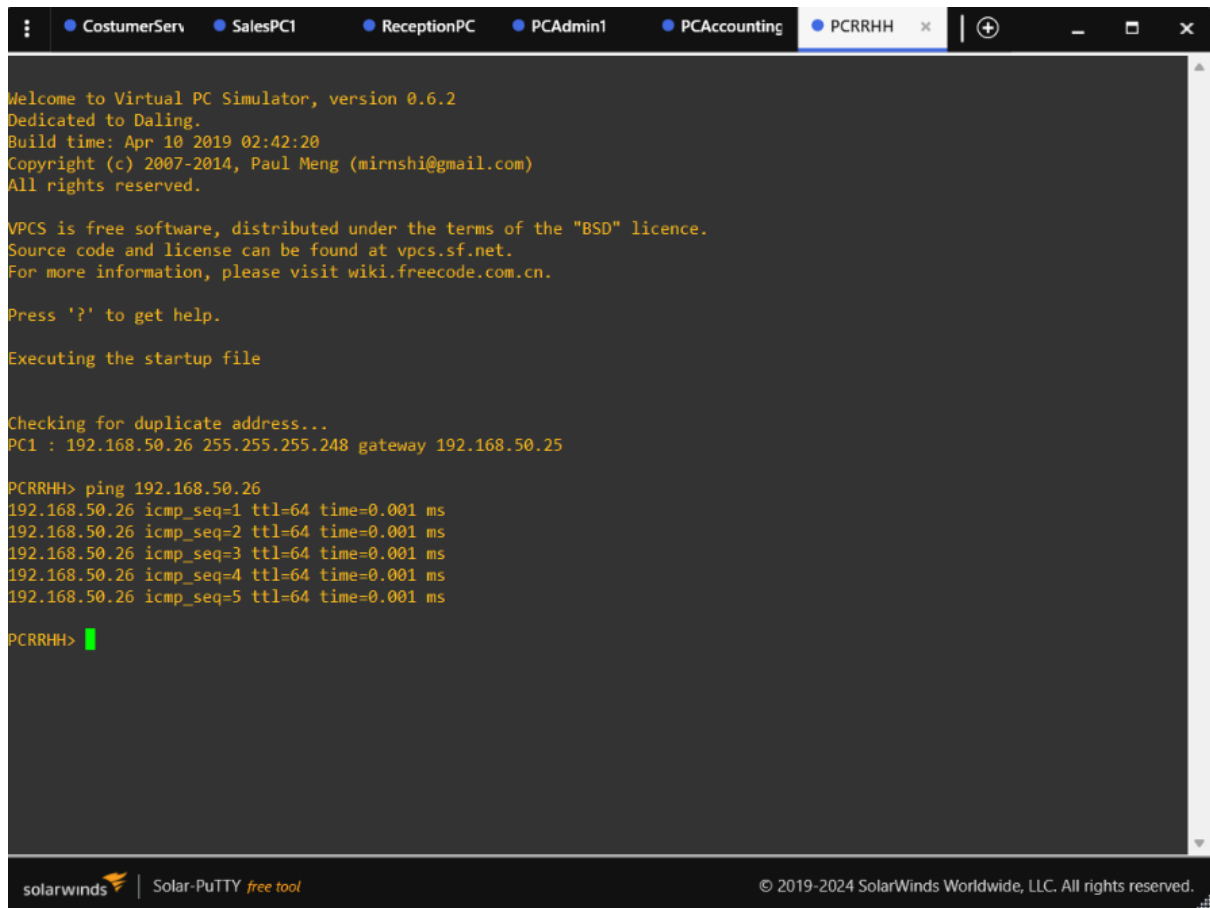

```

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.26 255.255.255.248 gateway 192.168.50.25

PCRRHH> ping 192.168.50.26
192.168.50.26 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.26 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.26 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.26 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.26 icmp_seq=5 ttl=64 time=0.001 ms

PCRRHH> 
```


solarwinds | Solar-PUTTY free tool

© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Prueba 2 — Comunicación entre departamentos diferentes (mismo nivel)

Dispositivo origen → destino: Administración → Recursos Humanos

```
ping 192.168.50.25
```

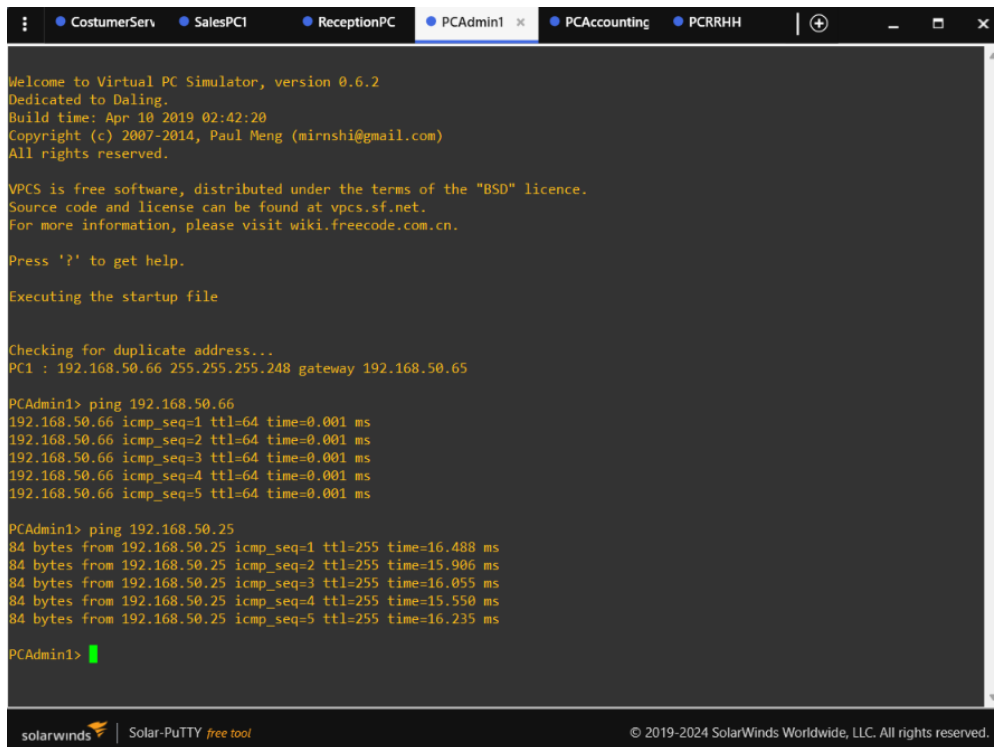

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for CostumerServ, SalesPC1, ReceptionPC, PCAdmin1 (active), PCAccounting, and PCRRHH. The terminal output displays the Virtual PC Simulator welcome message, followed by a ping command from PCAdmin1 to 192.168.50.66, which succeeds with 5 successful pings. Then, a ping command is executed from PCAdmin1 to 192.168.50.25, also succeeding with 5 pings. The bottom status bar shows 'solarwinds Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.66 255.255.255.248 gateway 192.168.50.65


PCAdmin1> ping 192.168.50.66
192.168.50.66 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=5 ttl=64 time=0.001 ms

PCAdmin1> ping 192.168.50.25
84 bytes from 192.168.50.25 icmp_seq=1 ttl=255 time=16.488 ms
84 bytes from 192.168.50.25 icmp_seq=2 ttl=255 time=15.906 ms
84 bytes from 192.168.50.25 icmp_seq=3 ttl=255 time=16.055 ms
84 bytes from 192.168.50.25 icmp_seq=4 ttl=255 time=15.550 ms
84 bytes from 192.168.50.25 icmp_seq=5 ttl=255 time=16.235 ms

PCAdmin1>
```

Dispositivo origen → destino: Contabilidad → Sala de Reuniones

```
ping 192.168.50.89
```

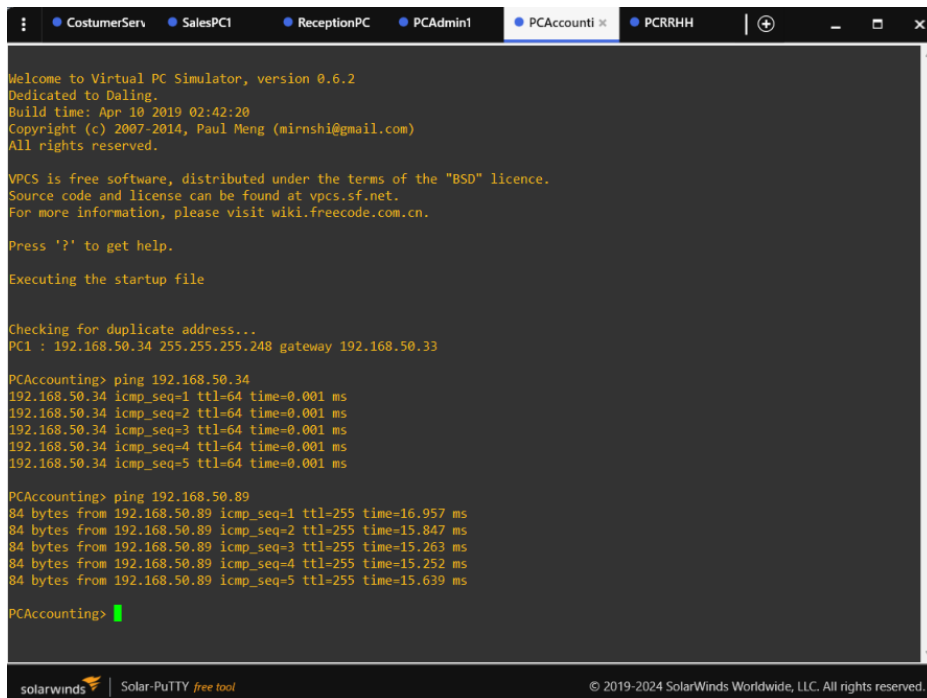

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for CostumerServ, SalesPC1, ReceptionPC, PCAdmin1, PCAccounting (active), and PCRRHH. The terminal output displays the Virtual PC Simulator welcome message, followed by a ping command from PCAccounting to 192.168.50.34, which succeeds with 5 successful pings. Then, a ping command is executed from PCAccounting to 192.168.50.89, also succeeding with 5 pings. The bottom status bar shows 'solarwinds Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.34 255.255.255.248 gateway 192.168.50.33

PCAccounting> ping 192.168.50.34
192.168.50.34 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.34 icmp_seq=5 ttl=64 time=0.001 ms

PCAccounting> ping 192.168.50.89
84 bytes from 192.168.50.89 icmp_seq=1 ttl=255 time=16.957 ms
84 bytes from 192.168.50.89 icmp_seq=2 ttl=255 time=15.847 ms
84 bytes from 192.168.50.89 icmp_seq=3 ttl=255 time=15.263 ms
84 bytes from 192.168.50.89 icmp_seq=4 ttl=255 time=15.252 ms
84 bytes from 192.168.50.89 icmp_seq=5 ttl=255 time=15.639 ms


PCAccounting>
```

NIVEL 3 — Área Estratégica / IT

Prueba 1 — Comunicación intra-departamento

Dispositivo origen → destino: IT PC1 → IT PC2

```
ping 192.168.50.2
```

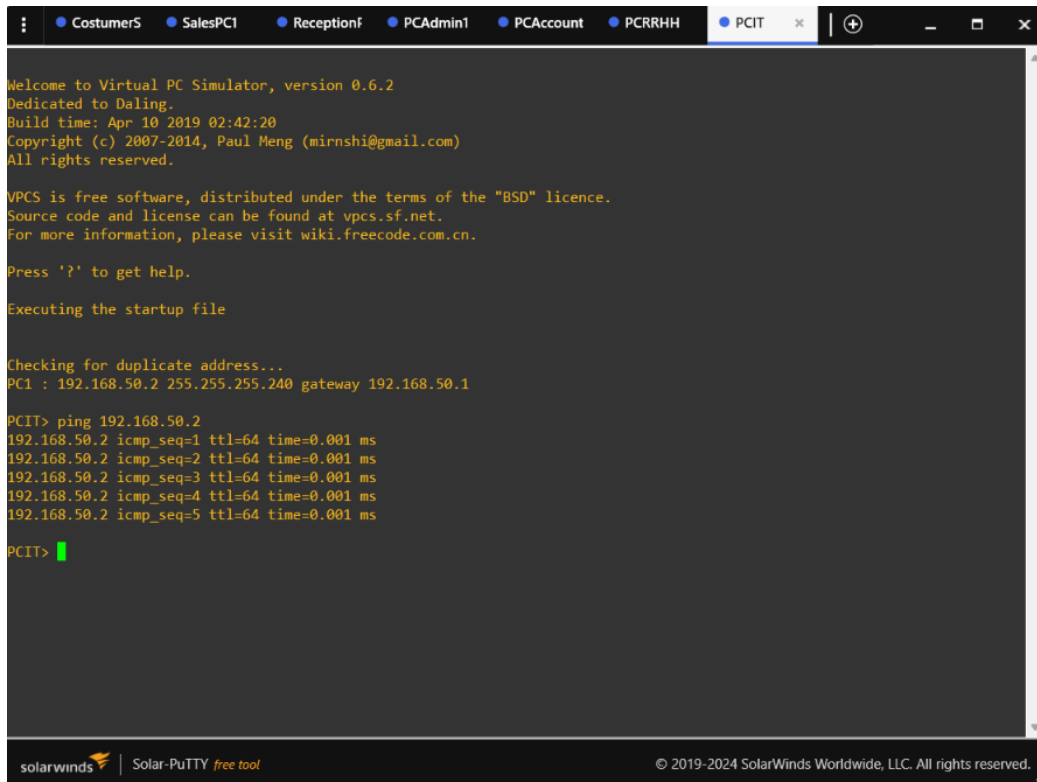

The screenshot shows a SolarWinds Solar-PuTTY terminal window. The title bar includes tabs for 'CostumerS', 'SalesPC1', 'Receptionf', 'PCAdmin1', 'PCAccount', 'PCRRHH', and 'PCIT'. The terminal output displays the Virtual PC Simulator version 0.6.2, build time, and copyright information. It then shows the execution of a startup file and a check for duplicate addresses. The IP address 192.168.50.2 is assigned to PC1. The user 'PCIT' enters the command 'ping 192.168.50.2', resulting in five successful ping responses with a TTL of 64 and a time of 0.001 ms each. The terminal footer shows 'solarwinds | Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file


Checking for duplicate address...
PC1 : 192.168.50.2 255.255.255.240 gateway 192.168.50.1

PCIT> ping 192.168.50.2
192.168.50.2 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=5 ttl=64 time=0.001 ms

PCIT>
```

Dispositivo origen → destino: Gerencia PC1 → Gerencia PC2

```
ping 192.168.50.50
```

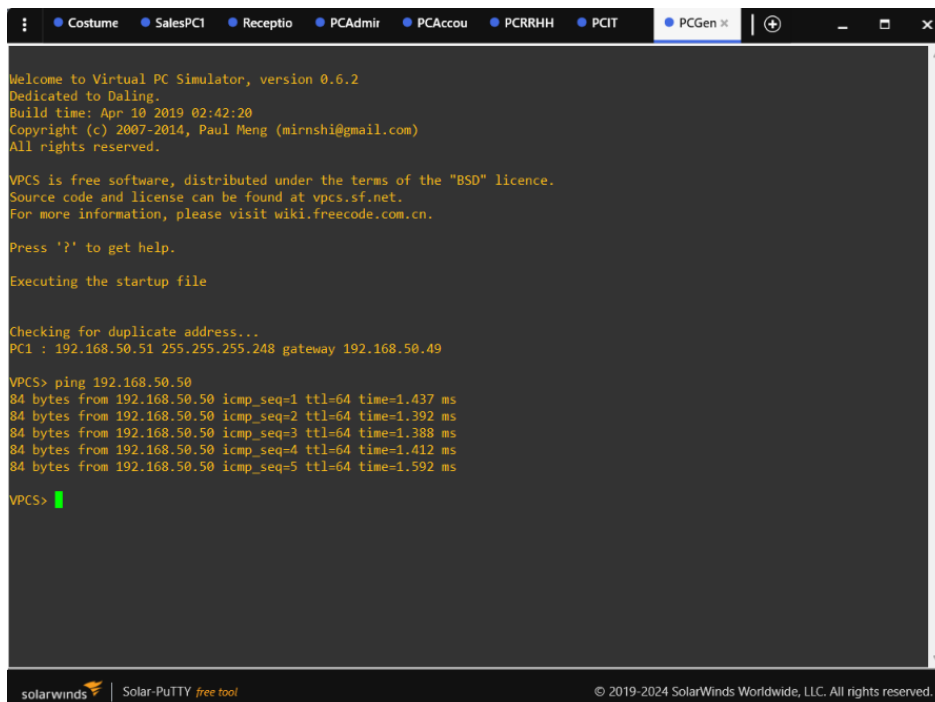

The screenshot shows a SolarWinds Solar-PuTTY terminal window. The title bar includes tabs for 'Costume', 'SalesPC1', 'Receptio', 'PCAdmir', 'PCAccou', 'PCRRHH', 'PCIT', and 'PCGen'. The terminal output displays the Virtual PC Simulator version 0.6.2, build time, and copyright information. It then shows the execution of a startup file and a check for duplicate addresses. The IP address 192.168.50.51 is assigned to PC1. The user 'VPCS' enters the command 'ping 192.168.50.50', resulting in five successful ping responses with a TTL of 64 and times ranging from 1.388 ms to 1.592 ms. The terminal footer shows 'solarwinds | Solar-PuTTY free tool' and '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.51 255.255.255.248 gateway 192.168.50.49

VPCS> ping 192.168.50.50
84 bytes from 192.168.50.50 icmp_seq=1 ttl=64 time=1.437 ms
84 bytes from 192.168.50.50 icmp_seq=2 ttl=64 time=1.392 ms
84 bytes from 192.168.50.50 icmp_seq=3 ttl=64 time=1.388 ms
84 bytes from 192.168.50.50 icmp_seq=4 ttl=64 time=1.412 ms
84 bytes from 192.168.50.50 icmp_seq=5 ttl=64 time=1.592 ms

VPCS>
```

Dispositivo origen → destino: Soporte PC1 → Soporte PC2

```
ping 192.168.51.1
```

```

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.51.2 255.255.255.248 gateway 192.168.51.1

PCSoporte> ping 192.168.51.1
84 bytes from 192.168.51.1 icmp_seq=1 ttl=255 time=15.954 ms
84 bytes from 192.168.51.1 icmp_seq=2 ttl=255 time=15.713 ms
84 bytes from 192.168.51.1 icmp_seq=3 ttl=255 time=15.918 ms
84 bytes from 192.168.51.1 icmp_seq=4 ttl=255 time=16.172 ms
84 bytes from 192.168.51.1 icmp_seq=5 ttl=255 time=16.522 ms

PCSoporte>

```

Prueba 2 — Comunicación entre departamentos diferentes (mismo nivel)

Dispositivo origen → destino: IT → Servidores

ping 192.168.50.41

```

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.2 255.255.255.240 gateway 192.168.50.1

PCIT> ping 192.168.50.2
192.168.50.2 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.2 icmp_seq=5 ttl=64 time=0.001 ms

PCIT> ping 192.168.50.41
84 bytes from 192.168.50.41 icmp_seq=1 ttl=255 time=16.232 ms
84 bytes from 192.168.50.41 icmp_seq=2 ttl=255 time=15.717 ms
84 bytes from 192.168.50.41 icmp_seq=3 ttl=255 time=15.645 ms
84 bytes from 192.168.50.41 icmp_seq=4 ttl=255 time=15.919 ms
84 bytes from 192.168.50.41 icmp_seq=5 ttl=255 time=16.114 ms

PCIT>

```


Dispositivo origen → destino: Gerencia → IT


ping 192.168.50.1

Comunicación entre niveles

Prueba 3: Entre niveles del edificio — N1 → N2 y N1 → N3

Dispositivo origen → destino: N1 Ventas → N2 Administración


```
ping 192.168.50.65
```

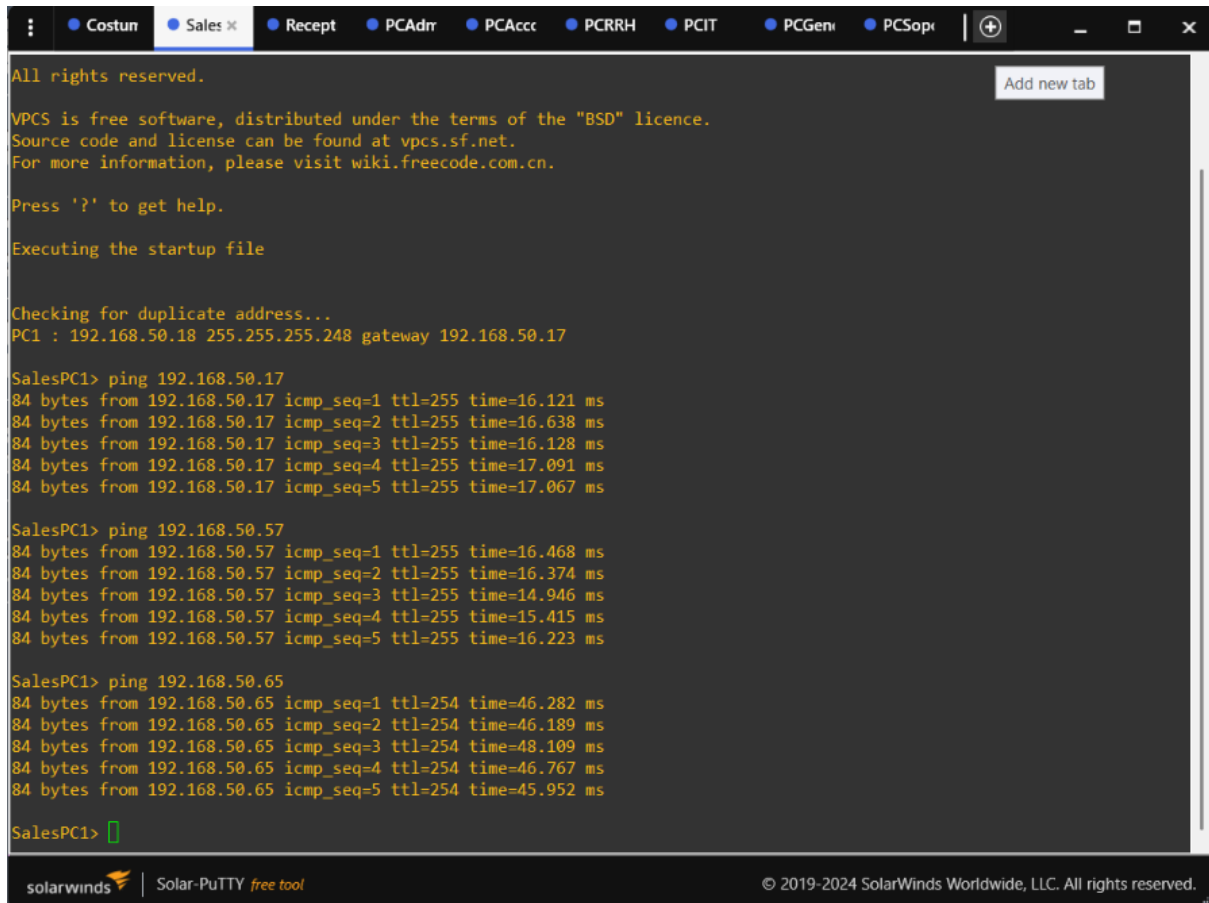

```
Costun Sales x Recept PCAdm PCAccc PCRRH PCIT PCGen PCSop | + - □ x
All rights reserved.
VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.
Press '?' to get help.
Executing the startup file
Checking for duplicate address...
PC1 : 192.168.50.18 255.255.255.248 gateway 192.168.50.17
SalesPC1> ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.121 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=16.638 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=16.128 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=17.091 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=17.067 ms
SalesPC1> ping 192.168.50.57
84 bytes from 192.168.50.57 icmp_seq=1 ttl=255 time=16.468 ms
84 bytes from 192.168.50.57 icmp_seq=2 ttl=255 time=16.374 ms
84 bytes from 192.168.50.57 icmp_seq=3 ttl=255 time=14.946 ms
84 bytes from 192.168.50.57 icmp_seq=4 ttl=255 time=15.415 ms
84 bytes from 192.168.50.57 icmp_seq=5 ttl=255 time=16.223 ms
SalesPC1> ping 192.168.50.65
84 bytes from 192.168.50.65 icmp_seq=1 ttl=254 time=46.282 ms
84 bytes from 192.168.50.65 icmp_seq=2 ttl=254 time=46.189 ms
84 bytes from 192.168.50.65 icmp_seq=3 ttl=254 time=48.109 ms
84 bytes from 192.168.50.65 icmp_seq=4 ttl=254 time=46.767 ms
84 bytes from 192.168.50.65 icmp_seq=5 ttl=254 time=45.952 ms
SalesPC1> █
solarwinds | Solar-PUTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.
```

Dispositivo origen → destino: N1 Recepción → N3 Gerencia

```
ping 192.168.50.49
```

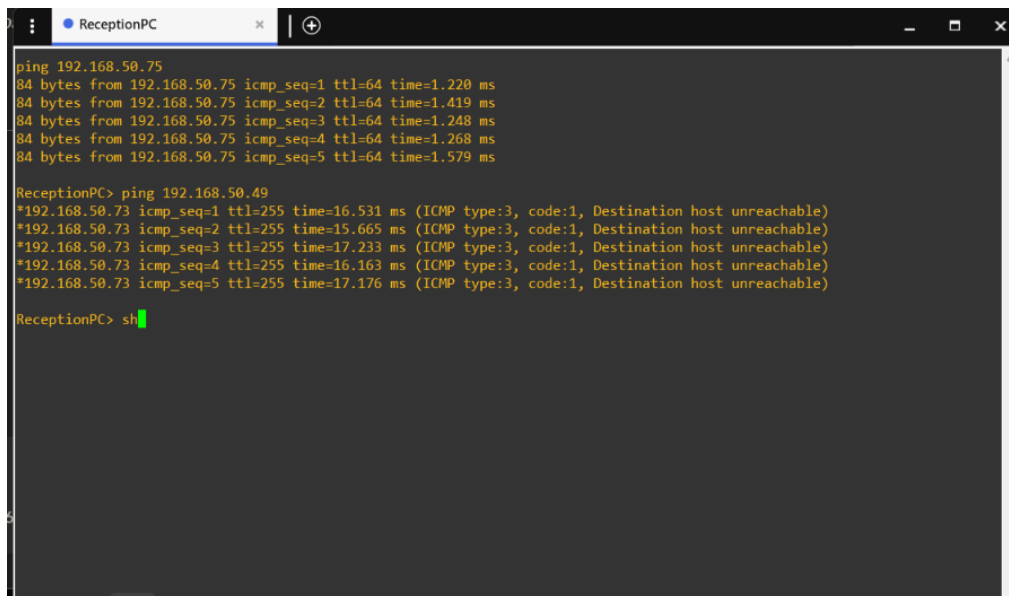


```
ReceptionPC x | + - □ x
ping 192.168.50.75
84 bytes from 192.168.50.75 icmp_seq=1 ttl=64 time=1.220 ms
84 bytes from 192.168.50.75 icmp_seq=2 ttl=64 time=1.419 ms
84 bytes from 192.168.50.75 icmp_seq=3 ttl=64 time=1.248 ms
84 bytes from 192.168.50.75 icmp_seq=4 ttl=64 time=1.268 ms
84 bytes from 192.168.50.75 icmp_seq=5 ttl=64 time=1.579 ms
ReceptionPC> ping 192.168.50.49
*192.168.50.73 icmp_seq=1 ttl=255 time=16.531 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.73 icmp_seq=2 ttl=255 time=15.665 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.73 icmp_seq=3 ttl=255 time=17.233 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.73 icmp_seq=4 ttl=255 time=16.163 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.73 icmp_seq=5 ttl=255 time=17.176 ms (ICMP type:3, code:1, Destination host unreachable)
ReceptionPC> sh █
```

El ping no fue exitoso debido a que el Router R3 no tenía configurada la red de enlace 192.168.51.0 en OSPF, por lo que las rutas hacia el Nivel 3 no se propagaban correctamente. Se identificó y corrigió el error durante las pruebas

Dispositivo origen → destino: N2 Contabilidad → N3 Servidores

ping 192.168.50.41

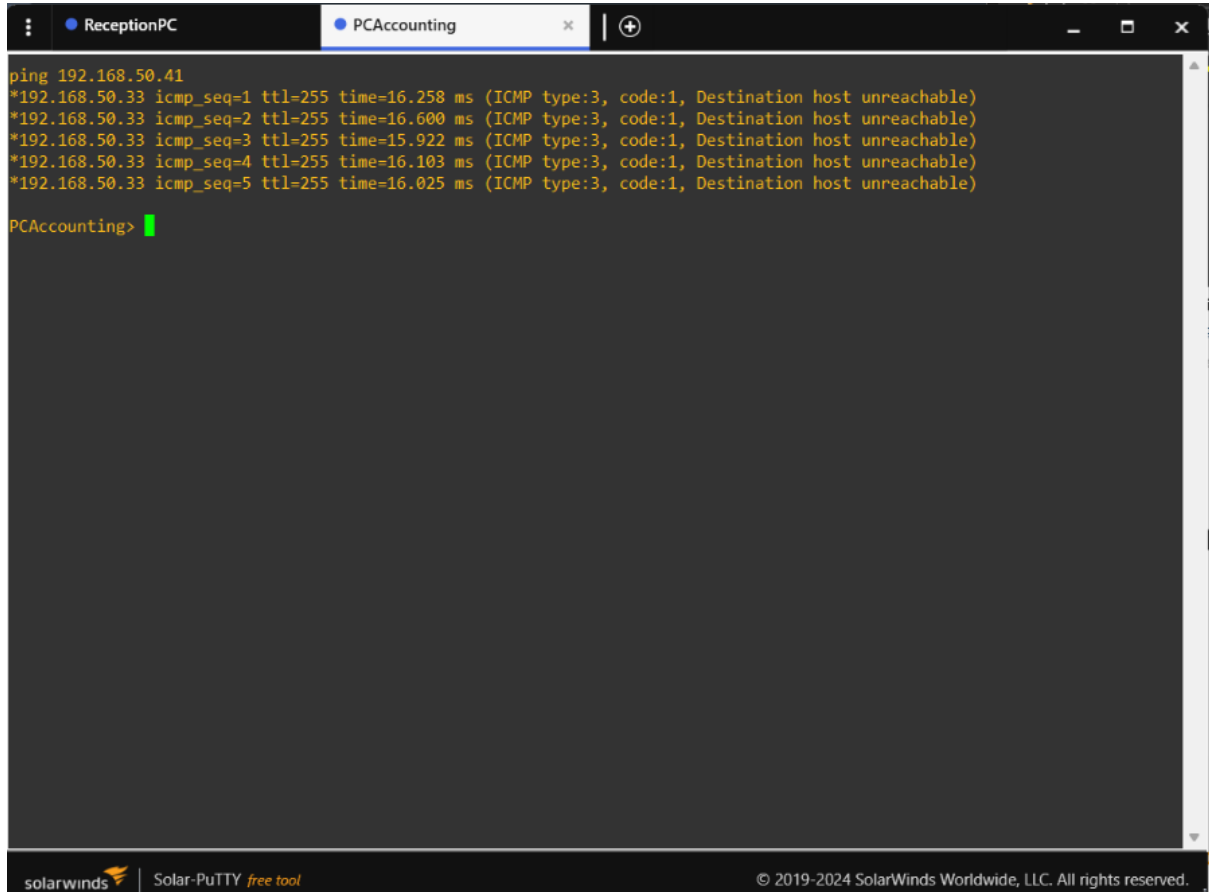

The screenshot shows a SolarWinds Solar-PuTTY terminal window with two tabs: 'ReceptionPC' and 'PcAccounting'. The 'PcAccounting' tab is active. The terminal output shows a ping command being executed from 192.168.50.33 to 192.168.50.41. Five ICMP echo requests were sent, all of which failed with the message 'Destination host unreachable'. The terminal text is as follows:

```
ping 192.168.50.41
*192.168.50.33 icmp_seq=1 ttl=255 time=16.258 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.33 icmp_seq=2 ttl=255 time=16.600 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.33 icmp_seq=3 ttl=255 time=15.922 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.33 icmp_seq=4 ttl=255 time=16.103 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.33 icmp_seq=5 ttl=255 time=16.025 ms (ICMP type:3, code:1, Destination host unreachable)
PcAccounting>
```


The bottom of the window shows the SolarWinds logo and the text 'Solar-PuTTY free tool' on the left, and the copyright notice '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.' on the right.

El ping no fue exitoso debido a que el Router R3 no tenía configurada la red de enlace 192.168.51.0 en OSPF, por lo que las rutas hacia el Nivel 3 no se propagaban correctamente. Se identificó y corrigió el error durante las pruebas

Pruebas OSPF y evidencia de rutas

Router R1:

show ip ospf neighbor

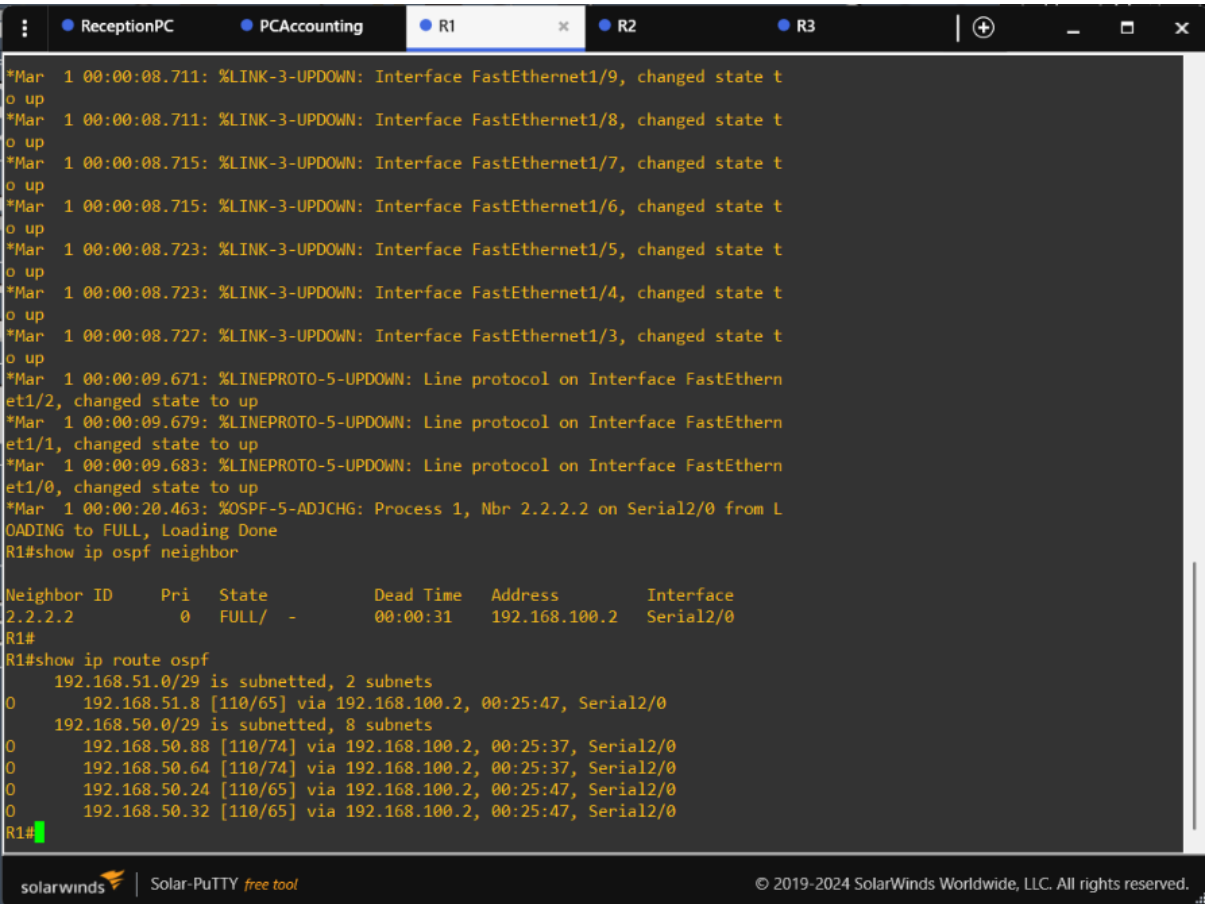

Router R2:

```
ReceptionPC  PCAccounting  R1  R2  R3
to up
*Mar 1 00:00:09.147: %LINK-3-UPDOWN: Interface FastEthernet1/11, changed state
to up
*Mar 1 00:00:09.151: %LINK-3-UPDOWN: Interface FastEthernet1/10, changed state
to up
*Mar 1 00:00:09.155: %LINK-3-UPDOWN: Interface FastEthernet1/9, changed state t
o up
*Mar 1 00:00:09.159: %LINK-3-UPDOWN: Interface FastEthernet1/8, changed state t
o up
*Mar 1 00:00:09.163: %LINK-3-UPDOWN: Interface FastEthernet1/7, changed state t
o up
*Mar 1 00:00:09.167: %LINK-3-UPDOWN: Interface FastEthernet1/6, changed state t
o up
*Mar 1 00:00:09.171: %LINK-3-UPDOWN: Interface FastEthernet1/5, changed state t
o up
*Mar 1 00:00:09.171: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state t
o up
*Mar 1 00:00:09.175: %LINK-3-UPDOWN: Interface FastEthernet1/3, changed state t
o up
*Mar 1 00:00:09.819: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/2,
changed state to down
*Mar 1 00:00:09.827: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/3,
changed state to down
*Mar 1 00:00:10.119: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/2, changed state to up
*Mar 1 00:00:10.127: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/1, changed state to up
*Mar 1 00:00:10.131: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
*Mar 1 00:00:33.723: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/1,
changed state to down
R2#show ip ospf neighbor

Neighbor ID    Pri   State           Dead Time   Address        Interface
1.1.1.1        0     FULL/ -         00:00:38    192.168.100.1  Serial2/0
R2#
```

solarwinds | Solar-PuTTY free tool | © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
ReceptionPC PAccounting R1 R2 R3
o up
*Mar 1 00:00:09.163: %LINK-3-UPDOWN: Interface FastEthernet1/7, changed state t
o up
*Mar 1 00:00:09.167: %LINK-3-UPDOWN: Interface FastEthernet1/6, changed state t
o up
*Mar 1 00:00:09.171: %LINK-3-UPDOWN: Interface FastEthernet1/5, changed state t
o up
*Mar 1 00:00:09.171: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state t
o up
*Mar 1 00:00:09.175: %LINK-3-UPDOWN: Interface FastEthernet1/3, changed state t
o up
*Mar 1 00:00:09.819: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/2,
changed state to down
*Mar 1 00:00:09.827: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/3,
changed state to down
*Mar 1 00:00:10.119: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/2, changed state to up
*Mar 1 00:00:10.127: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/1, changed state to up
*Mar 1 00:00:10.131: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
*Mar 1 00:00:33.723: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/1,
changed state to down
R2#show ip ospf neighbor
Neighbor ID Pri State Dead Time Address Interface
1.1.1.1 0 FULL/ - 00:00:38 192.168.100.1 Serial2/0
R2#show ip route ospf
192.168.51.0/29 is subnetted, 2 subnets
0 192.168.51.32 [110/74] via 192.168.100.1, 00:26:23, Serial2/0
192.168.50.0/29 is subnetted, 8 subnets
0 192.168.50.80 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
0 192.168.50.72 [110/74] via 192.168.100.1, 00:26:23, Serial2/0
0 192.168.50.16 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
0 192.168.50.56 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
R2#
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Router R3:

```
ReceptionPC PAccounting R1 R2 R3
to up
*Mar 1 00:00:09.407: %LINK-3-UPDOWN: Interface FastEthernet1/10, changed state
to up
*Mar 1 00:00:09.407: %LINK-3-UPDOWN: Interface FastEthernet1/9, changed state t
o up
*Mar 1 00:00:09.411: %LINK-3-UPDOWN: Interface FastEthernet1/8, changed state t
o up
*Mar 1 00:00:09.415: %LINK-3-UPDOWN: Interface FastEthernet1/7, changed state t
o up
*Mar 1 00:00:09.415: %LINK-3-UPDOWN: Interface FastEthernet1/6, changed state t
o up
*Mar 1 00:00:09.419: %LINK-3-UPDOWN: Interface FastEthernet1/5, changed state t
o up
*Mar 1 00:00:09.419: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state t
o up
*Mar 1 00:00:10.119: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to down
*Mar 1 00:00:10.155: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/1,
changed state to down
*Mar 1 00:00:10.159: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/2,
changed state to down
*Mar 1 00:00:10.159: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/3,
changed state to down
*Mar 1 00:00:10.367: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/3, changed state to up
*Mar 1 00:00:10.375: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/2, changed state to up
*Mar 1 00:00:10.379: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/1, changed state to up
*Mar 1 00:00:10.383: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
R3#show ip ospf neighbor
R3#show ip ospf neighbor
R3#
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

show ip

```
to up
*Mar 1 00:00:09.407: %LINK-3-UPDOWN: Interface FastEthernet1/9, changed state t
o up
*Mar 1 00:00:09.411: %LINK-3-UPDOWN: Interface FastEthernet1/8, changed state t
o up
*Mar 1 00:00:09.415: %LINK-3-UPDOWN: Interface FastEthernet1/7, changed state t
o up
*Mar 1 00:00:09.415: %LINK-3-UPDOWN: Interface FastEthernet1/6, changed state t
o up
*Mar 1 00:00:09.419: %LINK-3-UPDOWN: Interface FastEthernet1/5, changed state t
o up
*Mar 1 00:00:09.419: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state t
o up
*Mar 1 00:00:10.119: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to down
*Mar 1 00:00:10.155: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/1,
changed state to down
*Mar 1 00:00:10.159: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/2,
changed state to down
*Mar 1 00:00:10.159: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/3,
changed state to down
*Mar 1 00:00:10.367: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/3, changed state to up
*Mar 1 00:00:10.375: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/2, changed state to up
*Mar 1 00:00:10.379: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/1, changed state to up
*Mar 1 00:00:10.383: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
R3#show ip ospf neighbor
R3#show ip ospf neighbor
R3#show ip route ospf
R3#
```

Prueba 6 — Evidencia de conectividad exitosa (0% loss)

Comando: ping 192.168.50.17 -c 5

Comando: ping 192.168.50.49 -c 5

Comando: ping 192.168.50.65 -c 5

```
ping 192.168.50.17 -c 5
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.497 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=16.391 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=16.535 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=16.924 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=15.845 ms

VPCS> ping 192.168.50.49 -c 5
*192.168.50.57 icmp_seq=1 ttl=255 time=16.065 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.57 icmp_seq=2 ttl=255 time=16.701 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.57 icmp_seq=3 ttl=255 time=16.532 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.57 icmp_seq=4 ttl=255 time=16.244 ms (ICMP type:3, code:1, Destination host unreachable)
*192.168.50.57 icmp_seq=5 ttl=255 time=15.738 ms (ICMP type:3, code:1, Destination host unreachable)

VPCS> ping 192.168.50.65 -c 5
84 bytes from 192.168.50.65 icmp_seq=1 ttl=254 time=48.152 ms
84 bytes from 192.168.50.65 icmp_seq=2 ttl=254 time=46.511 ms
84 bytes from 192.168.50.65 icmp_seq=3 ttl=254 time=47.764 ms
84 bytes from 192.168.50.65 icmp_seq=4 ttl=254 time=47.913 ms
84 bytes from 192.168.50.65 icmp_seq=5 ttl=254 time=46.793 ms

VPCS>
```

Prueba de viaje de paquetes e identificación de routers

Desde N1 hacia N3 (R1 → R2 → R3):

```
trace 192.168.50.49
```

```
R1#
R1#trace 192.168.50.49

Type escape sequence to abort.
Tracing the route to 192.168.50.49

 0  * * *
 1  * * *
 2  * * *
 3  * * *
 4  * * *
 5  * * *
 6  * * *
 7  * * *
 8  * * *
 9  * * *
10  * * *
11  * * *
12  * * *
13  * * *
14  * * *
15  * * *
16  * * *
17  * * *
18  * * *
19  * * *
20  * * *
21  * * *
22  * * *
23  * * *
24  * * *
25  * * *
26  * * *
27  * * *
28  * * *
29  * * *
30  * * *
```

Desde N1 hacia N2:


```
o up
*Mar 1 00:00:09.171: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state t
o up
*Mar 1 00:00:09.175: %LINK-3-UPDOWN: Interface FastEthernet1/3, changed state t
o up
*Mar 1 00:00:09.819: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/2,
changed state to down
*Mar 1 00:00:09.827: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/3,
changed state to down
*Mar 1 00:00:10.119: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/2, changed state to up
*Mar 1 00:00:10.127: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/1, changed state to up
*Mar 1 00:00:10.131: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
*Mar 1 00:00:33.723: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/1,
changed state to down
R2#show ip ospf neighbor

Neighbor ID    Pri  State           Dead Time   Address        Interface
1.1.1.1        0    FULL/ -         00:00:38    192.168.100.1  Serial2/0
R2#show ip route ospf
      192.168.51.0/29 is subnetted, 2 subnets
0       192.168.51.32 [110/74] via 192.168.100.1, 00:26:23, Serial2/0
      192.168.50.0/29 is subnetted, 8 subnets
0       192.168.50.80 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
0       192.168.50.72 [110/74] via 192.168.100.1, 00:26:23, Serial2/0
0       192.168.50.16 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
0       192.168.50.56 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
R2#trace 192.168.50.65

Type escape sequence to abort.
Tracing the route to 192.168.50.65

  1 192.168.50.65 0 msec 0 msec 0 msec
R2#
```

Interfaces de cada router:

```
*Mar 1 00:00:10.131: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
*Mar 1 00:00:33.723: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/1,
changed state to down
R2#show ip ospf neighbor

Neighbor ID    Pri  State           Dead Time   Address        Interface
1.1.1.1        0    FULL/ -         00:00:38    192.168.100.1  Serial2/0
R2#show ip route ospf
      192.168.51.0/29 is subnetted, 2 subnets
0       192.168.51.32 [110/74] via 192.168.100.1, 00:26:23, Serial2/0
      192.168.50.0/29 is subnetted, 8 subnets
0       192.168.50.80 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
0       192.168.50.72 [110/74] via 192.168.100.1, 00:26:23, Serial2/0
0       192.168.50.16 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
0       192.168.50.56 [110/65] via 192.168.100.1, 00:26:23, Serial2/0
R2#trace 192.168.50.65

Type escape sequence to abort.
Tracing the route to 192.168.50.65

  1 192.168.50.65 0 msec 0 msec 0 msec
R2#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 192.168.50.89   YES NVRAM  up          up
FastEthernet0/1 192.168.50.65   YES NVRAM  up          up
FastEthernet1/0 192.168.50.25   YES NVRAM  up          up
FastEthernet1/1 192.168.50.33   YES NVRAM  up          up
FastEthernet1/2 192.168.51.9    YES NVRAM  up          up
FastEthernet1/3 unassigned      YES unset  up          down
FastEthernet1/4 unassigned      YES unset  up          down
FastEthernet1/5 unassigned      YES unset  up          down
FastEthernet1/6 unassigned      YES unset  up          down
FastEthernet1/7 unassigned      YES unset  up          down
FastEthernet1/8 unassigned      YES unset  up          down
--More--
```

```
ReceptionPC  PCAccounting  R1  R2  R3  CostumerServ
FastEthernet1/3      192.168.51.25  YES NVRAM up      up
FastEthernet1/4      unassigned     YES unset up      down
FastEthernet1/5      unassigned     YES unset up      down
FastEthernet1/6      unassigned     YES unset up      down
FastEthernet1/7      unassigned     YES unset up      down
FastEthernet1/8      unassigned     YES unset up      down

R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#router ospf 1
R3(config-router)#network 192.168.51.0 0.0.0.255 area 0
R3(config-router)#end
R3#
*Mar  1 00:31:38.507: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip ospf neighbor
^
% Invalid input detected at '^' marker.

R3#show ip ospf neighbor

R3#show ip ospf neighbor

R3#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 192.168.50.49   YES NVRAM up          up
FastEthernet0/1 192.168.50.1    YES NVRAM up          up
FastEthernet1/0 192.168.50.41   YES NVRAM up          up
FastEthernet1/1 192.168.51.1    YES NVRAM up          up
FastEthernet1/2 192.168.51.17   YES NVRAM up          up
FastEthernet1/3 192.168.51.25   YES NVRAM up          up
FastEthernet1/4 unassigned      YES unset up          down
FastEthernet1/5 unassigned      YES unset up          down
FastEthernet1/6 unassigned      YES unset up          down
FastEthernet1/7 unassigned      YES unset up          down
FastEthernet1/8 unassigned      YES unset up          down
--More--
```

Posibles fallos y limitaciones del diseño

Descripción de limitaciones identificadas:

Durante las pruebas de conectividad se identificaron las siguientes limitaciones en el diseño de red: En primer lugar, se detectó que el Router R3 no tenía configurada la red de enlace 192.168.51.0/29 dentro del proceso OSPF, lo que impedía que las rutas hacia el Nivel 3 se propagaran correctamente hacia R1 y R2. Esto causó que los pings entre dispositivos de diferentes niveles fallaran con 'Destination host unreachable'. El error fue identificado durante las pruebas y corregido agregando la red faltante al proceso OSPF de R3. En segundo lugar, si el Router R2 cae, los niveles N1 y N3 pierden comunicación entre sí hasta que OSPF recalcula la ruta, lo cual puede tomar entre 10 y 40 segundos. En tercer lugar, los Access Points no cuentan con redundancia; si uno falla, el área inalámbrica correspondiente queda sin cobertura WiFi. Finalmente, las interfaces seriales entre routers representan un punto único de falla, ya que no existe un enlace de respaldo entre niveles.

Prueba 10 — Verificación del subneteo VLSM

Departamento	Subred	Rango válido	IP mostrada (show ip)
IT / Soporte	192.168.50.0/28	.1 — .14	Soporte 192.168.51.3 IT 192.168.50.2 192.168.50.3 192.168.50.2
Ventas	192.168.50.16/29	.17 — .22	192.168.50.18 192.168.50.19
Recursos Humanos	192.168.50.24/29	.25 — .30	192.168.50.26 192.168.50.27
Contabilidad	192.168.50.32/29	.33 — .38	192.168.50.34
Servidores	192.168.50.40/29	.41 — .46	192.168.50.45
Gerencia	192.168.50.48/29	.49 — .54	192.168.50.50 192.168.50.51
Atención al Cliente	192.168.50.56/29	.57 — .62	192.168.50.58 192.168.50.59
Administración	192.168.50.64/29	.65 — .70	192.168.50.67 192.168.50.66
Recepción	192.168.50.72/29	.73 — .78	192.168.50.74
Cámaras de Seguridad	192.168.50.80/29	.81 — .86	192.168.50.82 192.168.51.10 192.168.51.18
Sala de Reuniones	192.168.50.88/29	.89 — .94	192.168.50.90

```
PCGeneralManagment1 PCGeneralManagment PCRRHH1
show ip
NAME      : PCRRHH1[1]
IP/MASK    : 192.168.50.27/29
GATEWAY    : 192.168.50.25
DNS        :
MAC        : 00:50:79:66:68:0f
LPORT     : 10192
RHOST:PORT : 127.0.0.1:10193
MTU        : 1500
PCRRHH1>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCGeni PCGeni PCRRH PCMee SalesPC SalesPC Costun Costu Recept
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.59 255.255.255.248 gateway 192.168.50.57

VPCS> show ip
NAME      : VPCS[1]
IP/MASK    : 192.168.50.59/29
GATEWAY    : 192.168.50.57
DNS        :
MAC        : 00:50:79:66:68:0d
LPORT     : 10188
RHOST:PORT : 127.0.0.1:10189
MTU        : 1500
VPCS>
VPCS>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCGeni PCGeni PCRRH PCMee SalesPC SalesPC Costun Costun Recept
show ip
NAME      : SalesPC2[1]
IP/MASK    : 192.168.50.19/29
GATEWAY    : 192.168.50.17
DNS        :
MAC        : 00:50:79:66:68:00
LPORT      : 10164
RHOST:PORT : 127.0.0.1:10165
MTU        : 1500
SalesPC2>
```

```
PCGeni PCGeni PCRRH PCMee SalesPC SalesPC Costun Costun Recept
show ip
NAME      : SalesPC1[1]
IP/MASK    : 192.168.50.18/29
GATEWAY    : 192.168.50.17
DNS        :
MAC        : 00:50:79:66:68:01
LPORT      : 10162
RHOST:PORT : 127.0.0.1:10163
MTU        : 1500
SalesPC1>
SalesPC1>
SalesPC1>
```

```

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.90 255.255.255.248 gateway 192.168.50.89

VPCS> show ip

NAME      : VPCS[1]
IP/MASK    : 192.168.50.90/29
GATEWAY    : 192.168.50.89
DNS        :
MAC        : 00:50:79:66:68:18
LPORT     : 10210
RHOST:PORT : 127.0.0.1:10211
MTU        : 1500

VPCS>
VPCS>
VPCS> 
```

```
show ip

NAME       : PAccounting[1]
IP/MASK    : 192.168.50.34/29
GATEWAY    : 192.168.50.33
DNS        :
MAC        : 00:50:79:66:68:14
LPORT      : 10202
RHOST:PORT : 127.0.0.1:10203
MTU        : 1500

PAccounting>
PAccounting>
PAccounting>
```

```
show ip

NAME       : VPCS[1]
IP/MASK    : 192.168.50.51/29
GATEWAY    : 192.168.50.49
DNS        :
MAC        : 00:50:79:66:68:27
LPORT      : 10240
RHOST:PORT : 127.0.0.1:10241
MTU        : 1500

VPCS>
VPCS>
VPCS>
```

```
PCGeneralManagment1 PCGeneralManagmen x PCRRHH PCRRHH1
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.50 255.255.255.248 gateway 192.168.50.49

VPCS> show ip

NAME      : VPCS[1]
IP/MASK    : 192.168.50.50/29
GATEWAY    : 192.168.50.49
DNS        :
MAC        : 00:50:79:66:68:28
LPORT     : 10242
RHOST:PORT : 127.0.0.1:10243
MTU        : 1500

VPCS>
VPCS>
VPCS> █
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCIT PCSoporte
show ip

NAME      : PCIT[1]
IP/MASK    : 192.168.50.2/28
GATEWAY    : 192.168.50.1
DNS        :
MAC        : 00:50:79:66:68:24
LPORT     : 10234
RHOST:PORT : 127.0.0.1:10235
MTU        : 1500

PCIT> █
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.


```
PCIT  PCSoport
```

```
show ip
```

```
NAME      : PCSoport[1]
IP/MASK    : 192.168.51.2/29
GATEWAY    : 192.168.51.1
DNS        :
MAC        : 00:50:79:66:68:1d
LPORT      : 10220
RHOST:PORT : 127.0.0.1:10221
MTU        : 1500

PCSoporte>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCSoporte  PCSoport1  PCIT2  PCIT
```

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.3 255.255.255.240 gateway 192.168.50.1

PCIT2> show ip
```

```
NAME      : PCIT2[1]
IP/MASK    : 192.168.50.3/28
GATEWAY    : 192.168.50.1
DNS        :
MAC        : 00:50:79:66:68:25
LPORT      : 10236
RHOST:PORT : 127.0.0.1:10237
MTU        : 1500

PCIT2>
PCIT2>
PCIT2>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCServer PCGeneralManagi PCGeneralManagi PCRRHH PCRRHH1
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.45 255.255.255.248 gateway 192.168.50.41

PCServer> show ip

NAME      : PCServer[1]
IP/MASK    : 192.168.50.45/29
GATEWAY    : 192.168.50.41
DNS        :
MAC        : 00:50:79:66:68:1f
LPORT     : 10224
RHOST:PORT : 127.0.0.1:10225
MTU        : 1500

PCServer>
PCServer>
PCServer> 
```

```
PCIT PCIT2 PCSopi PCSopi PCServ PCGeni PCGeni PCRRH PCRRH
show ip

NAME      : PCIT3[1]
IP/MASK    : 192.168.50.4/28
GATEWAY    : 192.168.50.1
DNS        :
MAC        : 00:50:79:66:68:26
LPORT     : 10238
RHOST:PORT : 127.0.0.1:10239
MTU        : 1500

PCIT3> 
```