

Comprobación de conectividad en GNS3

Proyecto de Redes: Interlink Solutions

Equipo: Protocolo Osi Osi

Fecha: 26 de julio de 2026

Herramienta: GNS3 — Routers Cisco c3725 Red base: 192.168.50.0/24


Pruebas Realizadas:

NIVEL 1 — Área Operativa

Prueba 1— Comunicación intra-departamento

Dispositivo origen → **destino**: Ventas PC1 → Ventas PC2

```
ping 192.168.50.18
```

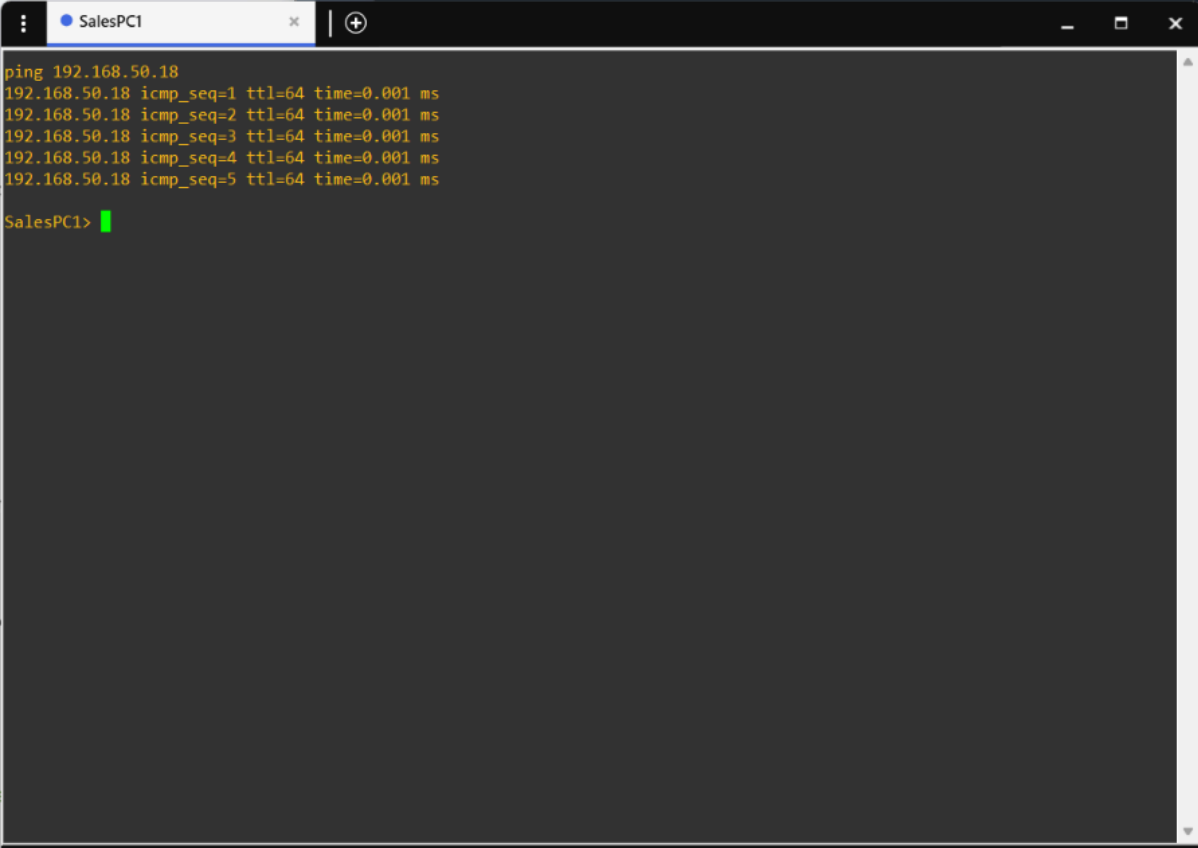


```
SalesPC1
ping 192.168.50.18
192.168.50.18 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=5 ttl=64 time=0.001 ms

SalesPC1>
```

The screenshot shows a terminal window titled 'SalesPC1' with a dark background. The output of the 'ping 192.168.50.18' command is displayed in yellow text, showing five successful pings with a time of 0.001 ms each. The prompt 'SalesPC1>' is shown at the bottom of the terminal area. The SolarWinds logo and 'Solar-PuTTY free tool' are visible in the bottom left corner, and the copyright notice '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.' is in the bottom right corner.

Dispositivo origen → destino: Recepción → Ventas (solo 1 PC en Recepción)

ping 192.168.50.17

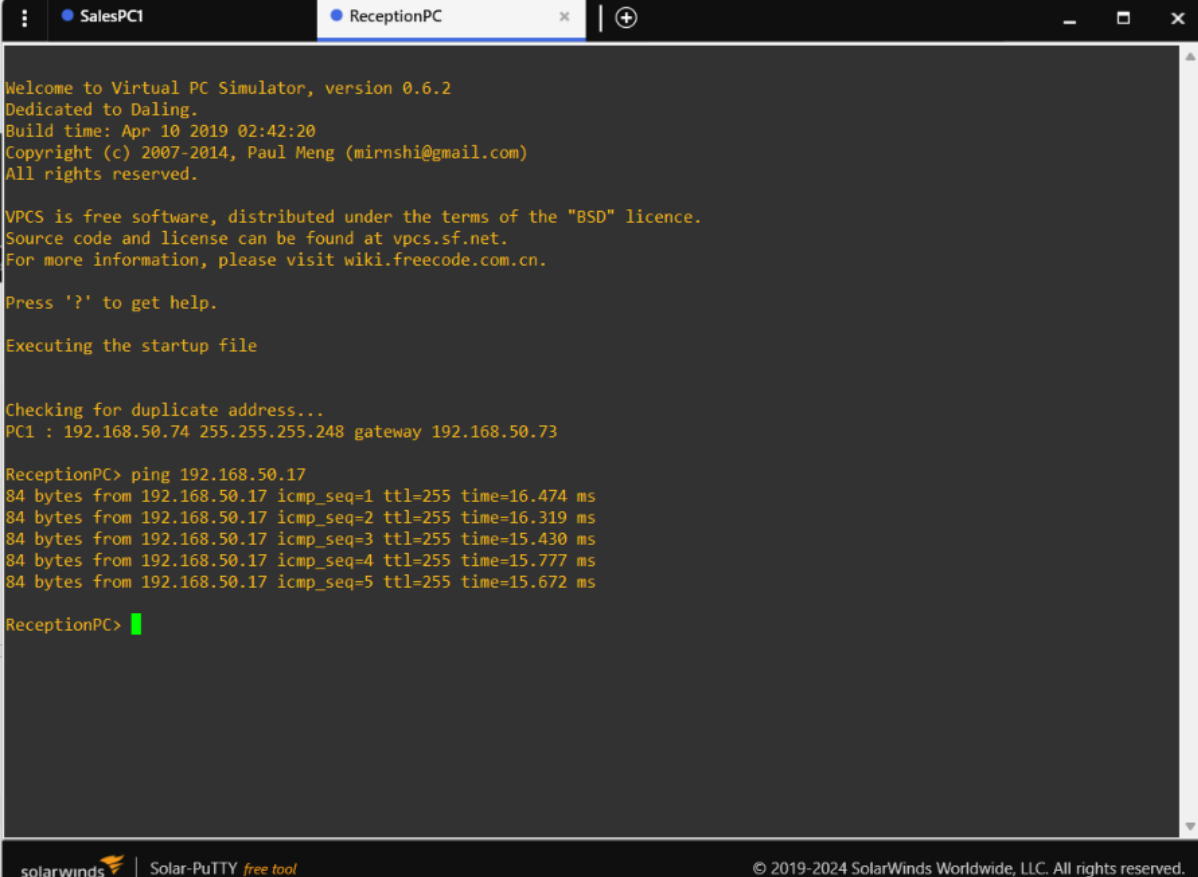

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file


Checking for duplicate address...
PC1 : 192.168.50.74 255.255.255.248 gateway 192.168.50.73

ReceptionPC> ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.474 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=16.319 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=15.430 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=15.777 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=15.672 ms

ReceptionPC> 
```

Dispositivo origen → destino: Atención al Cliente → Ventas (solo 1 PC)

ping 192.168.50.17

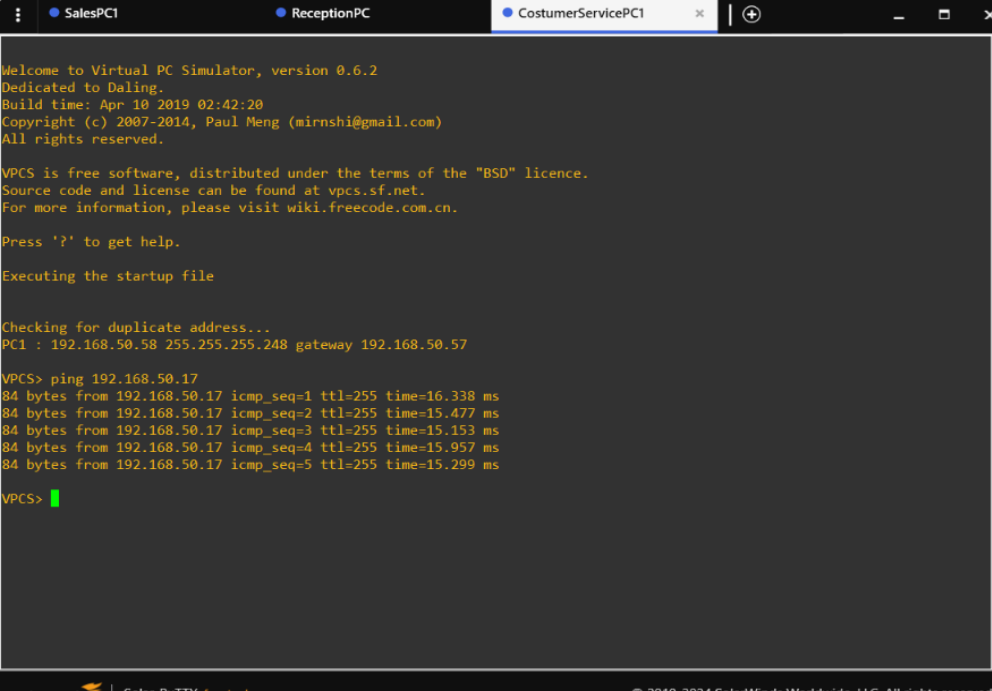

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.58 255.255.255.248 gateway 192.168.50.57


VPCS> ping 192.168.50.17
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=16.338 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=15.477 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=15.153 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=15.957 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=15.299 ms

VPCS> 
```

Prueba 2— Comunicación entre departamentos diferentes (mismo nivel)

Dispositivo origen → destino: Ventas → Atención al Cliente

```
ping 192.168.50.57
```

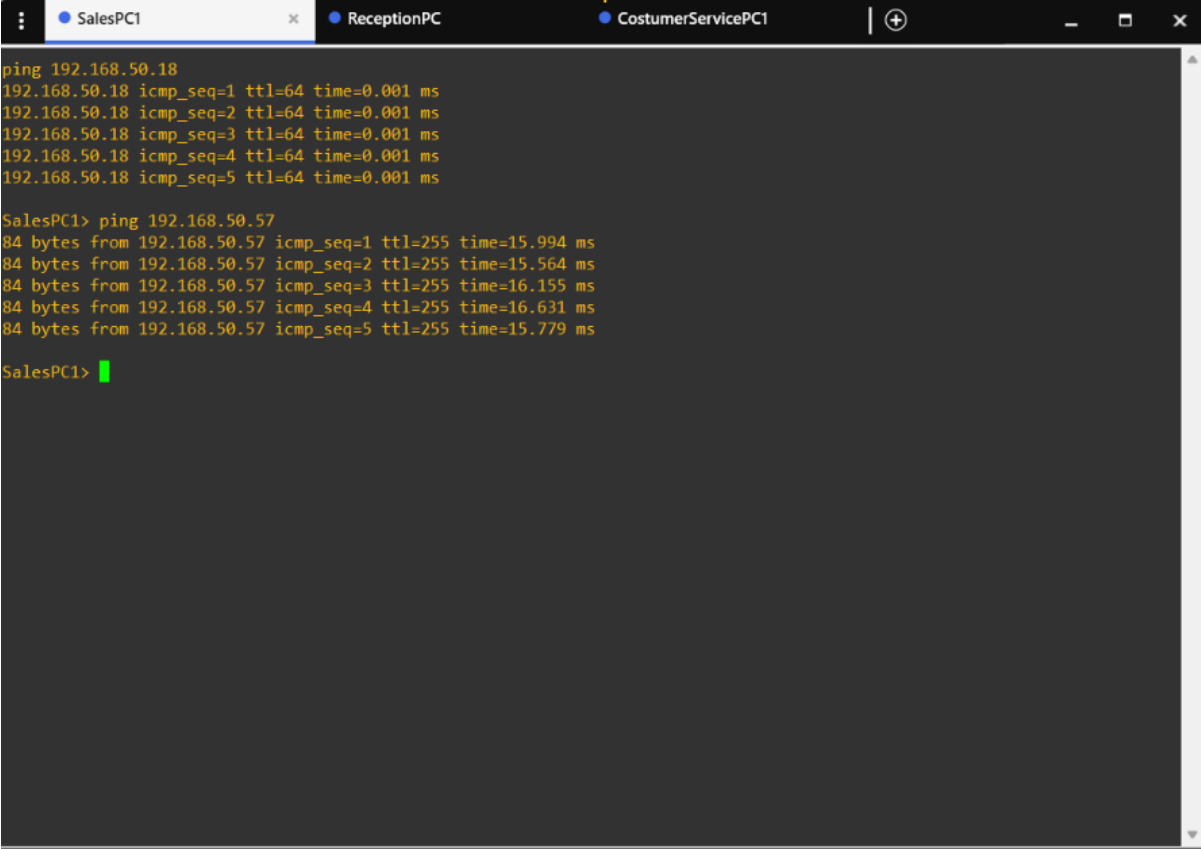

The screenshot shows a SolarWinds Solar-PuTTY terminal window with three tabs: SalesPC1, ReceptionPC, and CustomerServicePC1. The SalesPC1 tab is active, displaying the output of a ping command to 192.168.50.18 and 192.168.50.57. The output shows successful pings with TTL values of 64 and 255 respectively. The terminal window has a dark background and a status bar at the bottom.

```
ping 192.168.50.18
192.168.50.18 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.18 icmp_seq=5 ttl=64 time=0.001 ms

SalesPC1> ping 192.168.50.57
84 bytes from 192.168.50.57 icmp_seq=1 ttl=255 time=15.994 ms
84 bytes from 192.168.50.57 icmp_seq=2 ttl=255 time=15.564 ms
84 bytes from 192.168.50.57 icmp_seq=3 ttl=255 time=16.155 ms
84 bytes from 192.168.50.57 icmp_seq=4 ttl=255 time=16.631 ms
84 bytes from 192.168.50.57 icmp_seq=5 ttl=255 time=15.779 ms

SalesPC1>
```


solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

NIVEL 2 — Área Administrativa

Prueba 1 — Comunicación intra-departamento

Dispositivo origen → destino: Administración PC1 → Administración PC2

ping 192.168.50.66

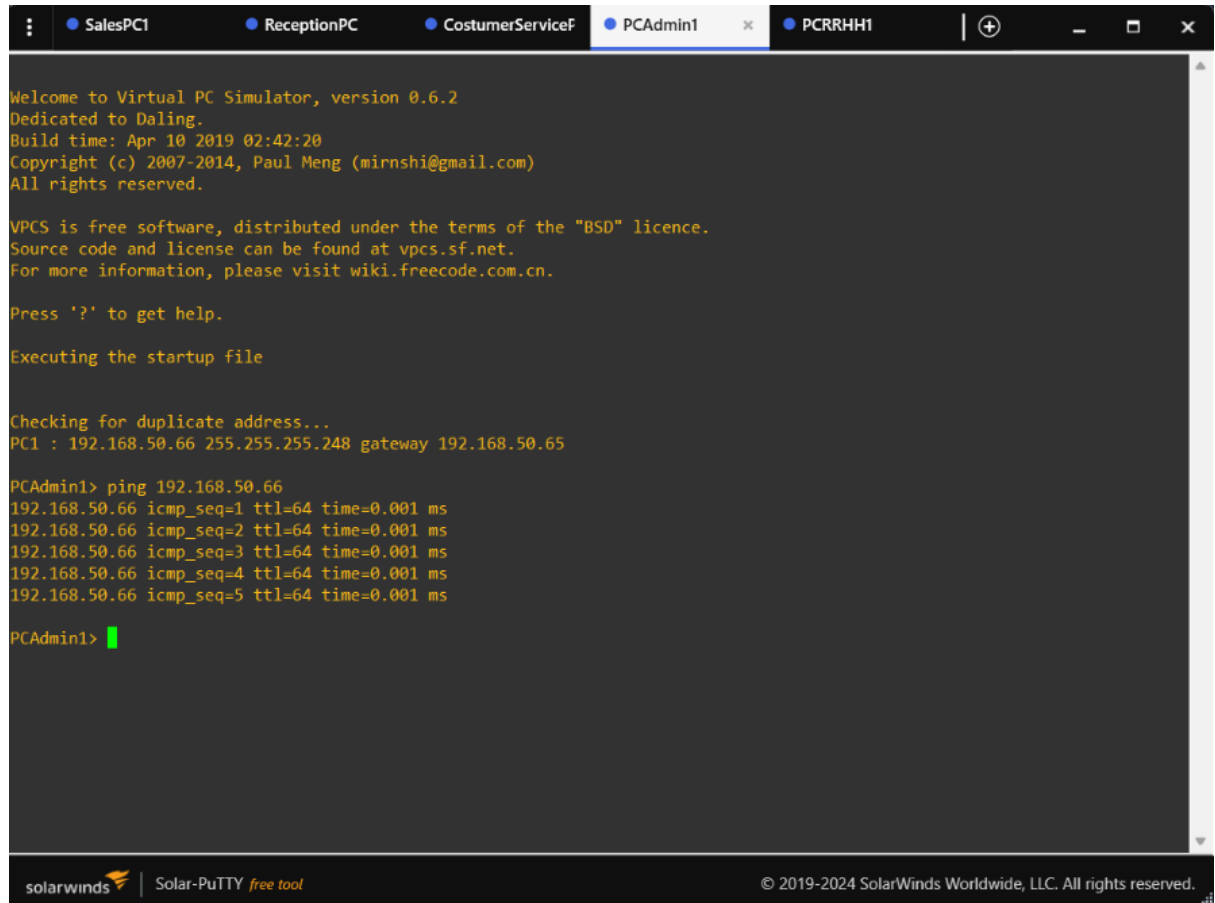

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the following content:

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.66 255.255.255.248 gateway 192.168.50.65


PCAdmin1> ping 192.168.50.66
192.168.50.66 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=5 ttl=64 time=0.001 ms

PCAdmin1>
```

The terminal window has tabs for SalesPC1, ReceptionPC, CostumerServiceF, PCAdmin1 (active), and PCRRHH1. The footer shows the SolarWinds logo and copyright information: © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Dispositivo origen → destino: Recursos Humanos PC1 → PC2

ping 192.168.50.26

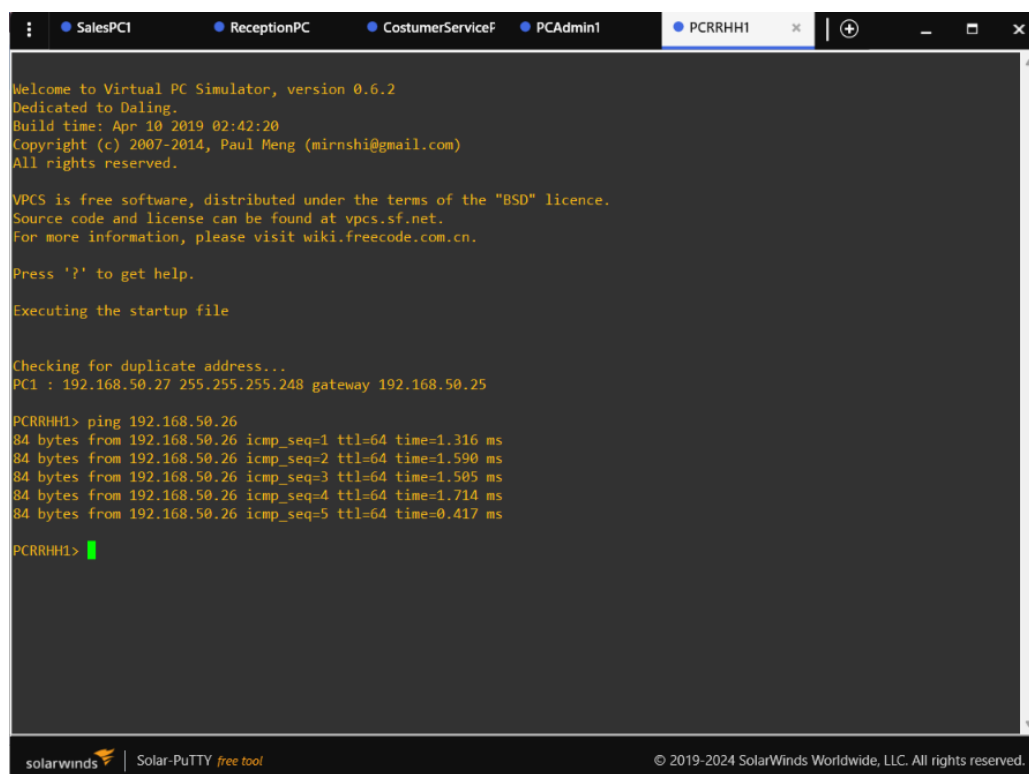

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the following content:

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.27 255.255.255.248 gateway 192.168.50.25

PCRRHH1> ping 192.168.50.26
84 bytes from 192.168.50.26 icmp_seq=1 ttl=64 time=1.316 ms
84 bytes from 192.168.50.26 icmp_seq=2 ttl=64 time=1.590 ms
84 bytes from 192.168.50.26 icmp_seq=3 ttl=64 time=1.505 ms
84 bytes from 192.168.50.26 icmp_seq=4 ttl=64 time=1.714 ms
84 bytes from 192.168.50.26 icmp_seq=5 ttl=64 time=0.417 ms


PCRRHH1>
```

The terminal window has tabs for SalesPC1, ReceptionPC, CostumerServiceF, PCAdmin1, and PCRRHH1 (active). The footer shows the SolarWinds logo and copyright information: © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Prueba 2 — Comunicación entre departamentos diferentes (mismo nivel)

Dispositivo origen → destino: Administración → Recursos Humanos

ping 192.168.50.25

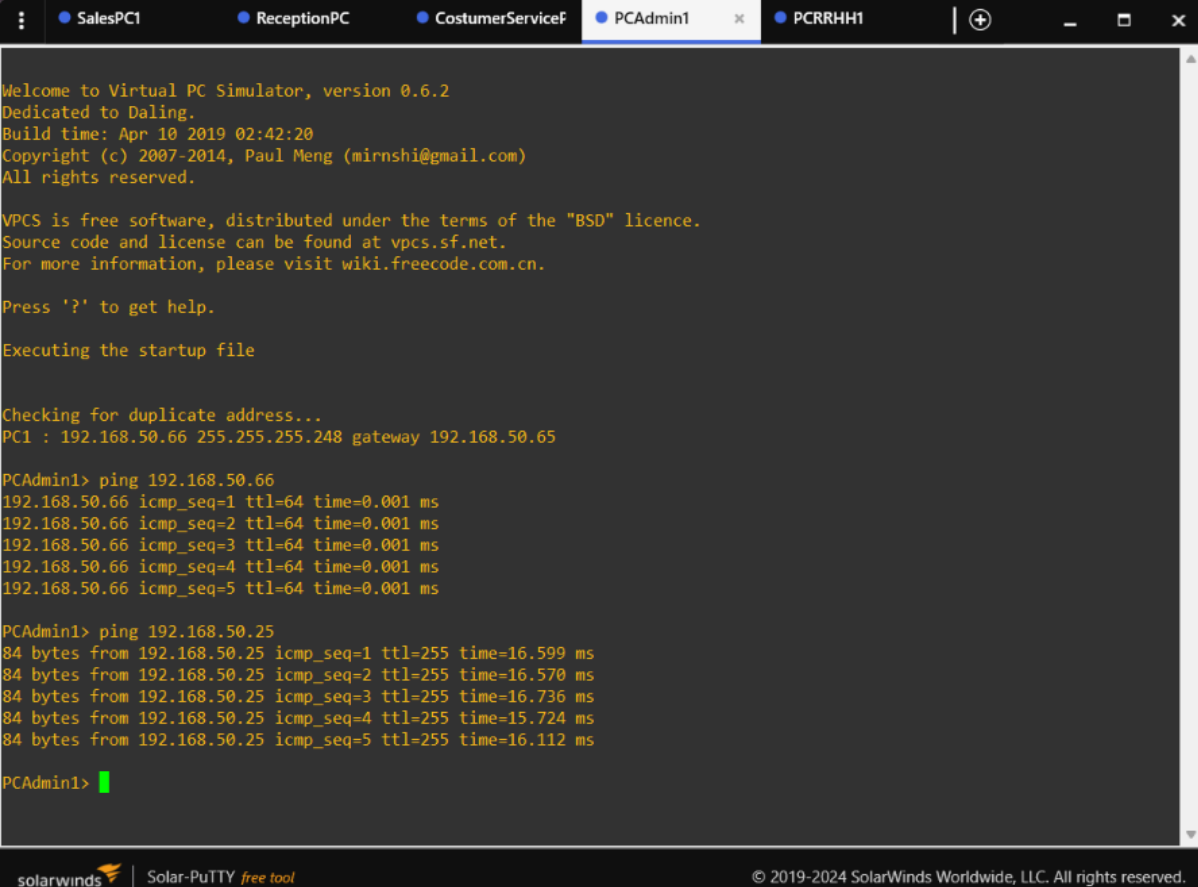

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for SalesPC1, ReceptionPC, CostumerServiceF, PCAdmin1 (active), and PCRRHH1. The terminal output displays the Virtual PC Simulator version 0.6.2 startup sequence, including a welcome message, build time (Apr 10 2019 02:42:20), and copyright information. It then shows the execution of a startup file and a check for duplicate addresses. The IP configuration for PC1 is 192.168.50.66 with a gateway of 192.168.50.65. The user PCAdmin1 enters the command 'ping 192.168.50.25'. The output shows five successful ping requests to 192.168.50.25, each with a TTL of 255 and response times ranging from 15.724 ms to 16.599 ms. The terminal ends with a green cursor on the PCAdmin1 prompt.

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.66 255.255.255.248 gateway 192.168.50.65


PCAdmin1> ping 192.168.50.25
192.168.50.66 icmp_seq=1 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=2 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=3 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=4 ttl=64 time=0.001 ms
192.168.50.66 icmp_seq=5 ttl=64 time=0.001 ms

PCAdmin1> ping 192.168.50.25
84 bytes from 192.168.50.25 icmp_seq=1 ttl=255 time=16.599 ms
84 bytes from 192.168.50.25 icmp_seq=2 ttl=255 time=16.570 ms
84 bytes from 192.168.50.25 icmp_seq=3 ttl=255 time=16.736 ms
84 bytes from 192.168.50.25 icmp_seq=4 ttl=255 time=15.724 ms
84 bytes from 192.168.50.25 icmp_seq=5 ttl=255 time=16.112 ms

PCAdmin1>
```

Dispositivo origen → destino: → Sala de Reuniones

ping 192.168.50.89

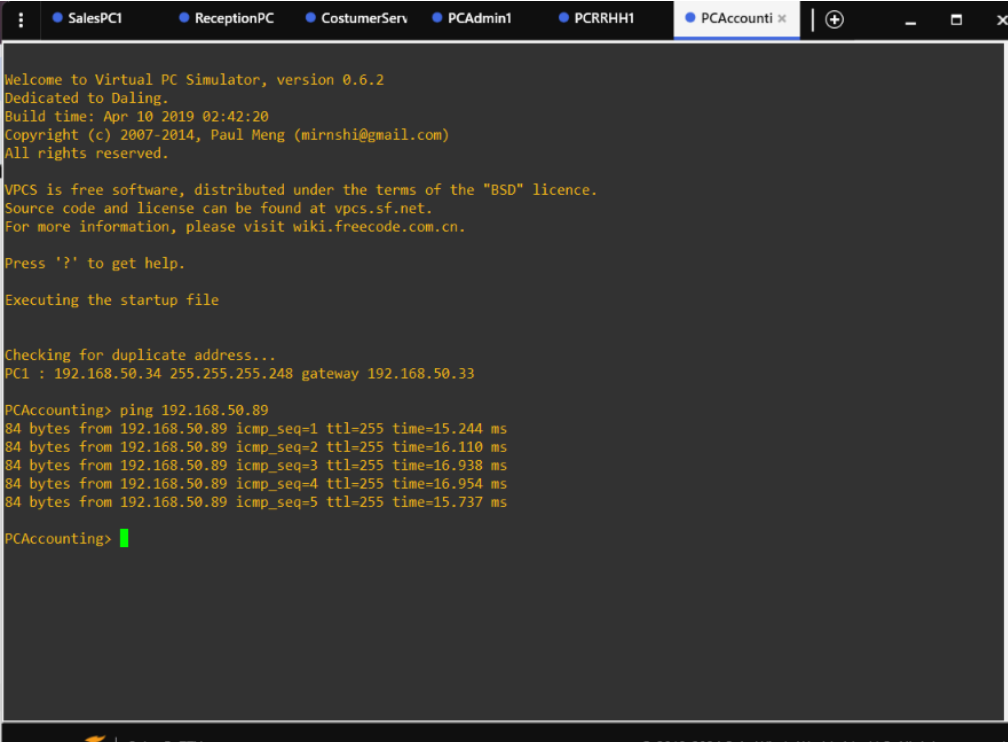

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for SalesPC1, ReceptionPC, CostumerServ, PCAdmin1, PCRRHH1, and PCAccounting (active). The terminal output displays the Virtual PC Simulator version 0.6.2 startup sequence, including a welcome message, build time (Apr 10 2019 02:42:20), and copyright information. It then shows the execution of a startup file and a check for duplicate addresses. The IP configuration for PC1 is 192.168.50.34 with a gateway of 192.168.50.33. The user PCAccounting enters the command 'ping 192.168.50.89'. The output shows five successful ping requests to 192.168.50.89, each with a TTL of 255 and response times ranging from 15.737 ms to 16.938 ms. The terminal ends with a green cursor on the PCAccounting prompt.

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.34 255.255.255.248 gateway 192.168.50.33

PCAccounting> ping 192.168.50.89
84 bytes from 192.168.50.89 icmp_seq=1 ttl=255 time=15.244 ms
84 bytes from 192.168.50.89 icmp_seq=2 ttl=255 time=16.110 ms
84 bytes from 192.168.50.89 icmp_seq=3 ttl=255 time=16.938 ms
84 bytes from 192.168.50.89 icmp_seq=4 ttl=255 time=16.954 ms
84 bytes from 192.168.50.89 icmp_seq=5 ttl=255 time=15.737 ms

PCAccounting>
```

3 NIVEL — Área Estratégica / IT


Prueba 1 — Comunicación intra-departamento

Dispositivo origen → destino: IT PC1 → IT PC2

```
ping 192.168.50.2
```

Dispositivo origen → destino: Gerencia PC1 → Gerencia PC2

ping 192.168.50.50

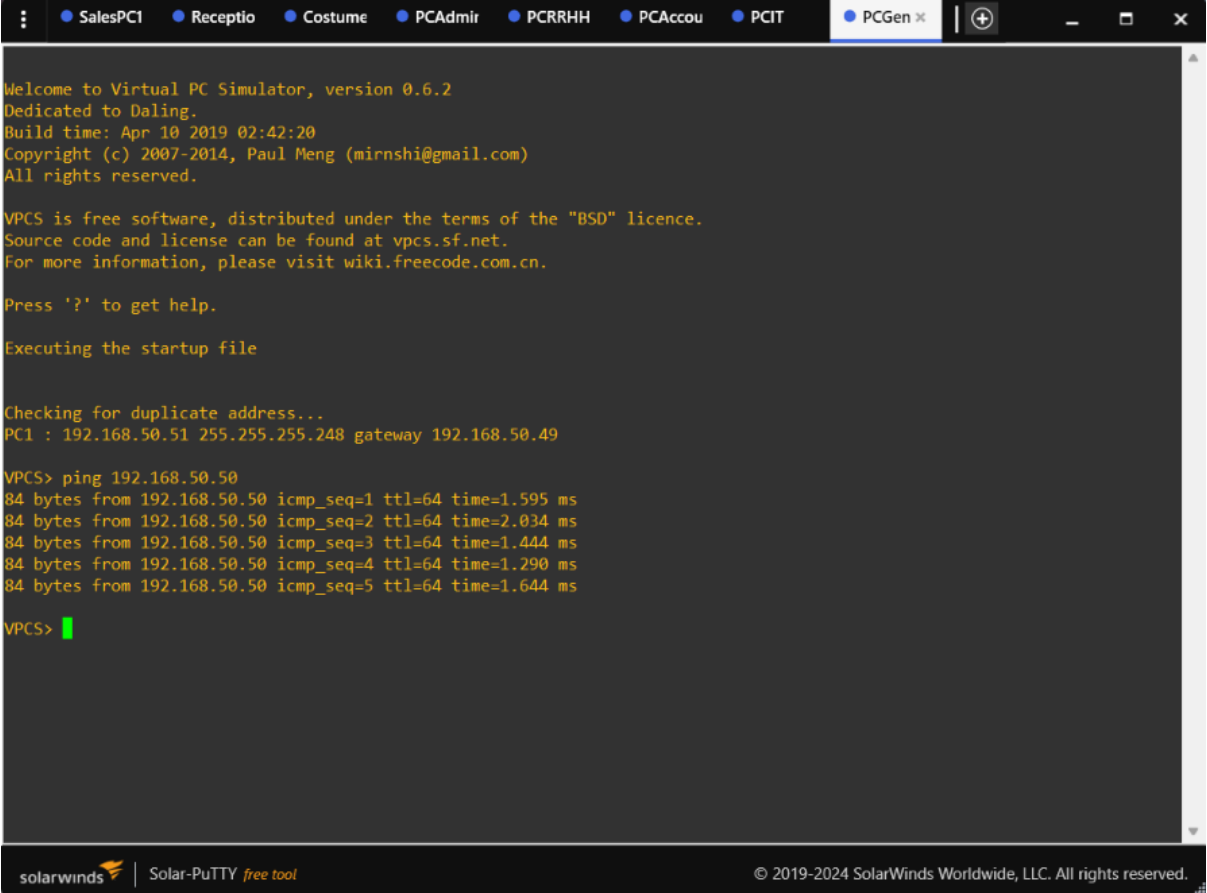

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.51 255.255.255.248 gateway 192.168.50.49


VPCS> ping 192.168.50.50
84 bytes from 192.168.50.50 icmp_seq=1 ttl=64 time=1.595 ms
84 bytes from 192.168.50.50 icmp_seq=2 ttl=64 time=2.034 ms
84 bytes from 192.168.50.50 icmp_seq=3 ttl=64 time=1.444 ms
84 bytes from 192.168.50.50 icmp_seq=4 ttl=64 time=1.290 ms
84 bytes from 192.168.50.50 icmp_seq=5 ttl=64 time=1.644 ms

VPCS> 
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Dispositivo origen → destino: Soporte PC1 → Soporte PC2

ping 192.168.50.6

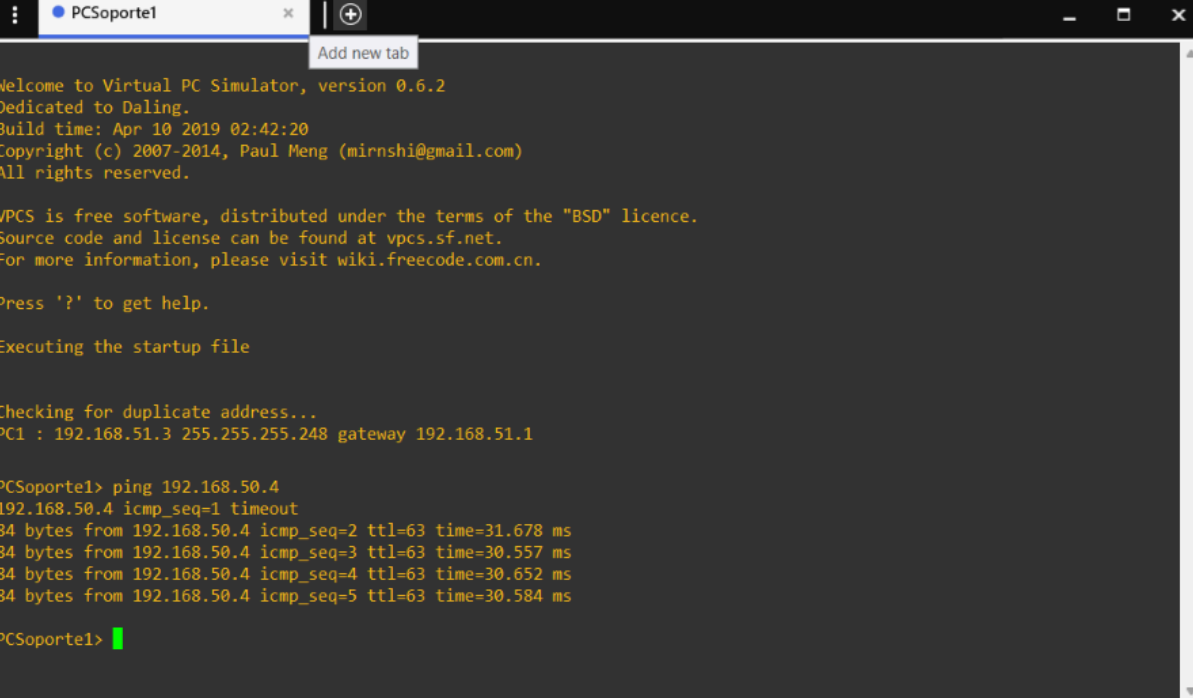

```
PCSoporte1
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.


Executing the startup file

Checking for duplicate address...
PC1 : 192.168.51.3 255.255.255.248 gateway 192.168.51.1

PCSoporte1> ping 192.168.50.4
192.168.50.4 icmp_seq=1 timeout
84 bytes from 192.168.50.4 icmp_seq=2 ttl=63 time=31.678 ms
84 bytes from 192.168.50.4 icmp_seq=3 ttl=63 time=30.557 ms
84 bytes from 192.168.50.4 icmp_seq=4 ttl=63 time=30.652 ms
84 bytes from 192.168.50.4 icmp_seq=5 ttl=63 time=30.584 ms

PCSoporte1>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

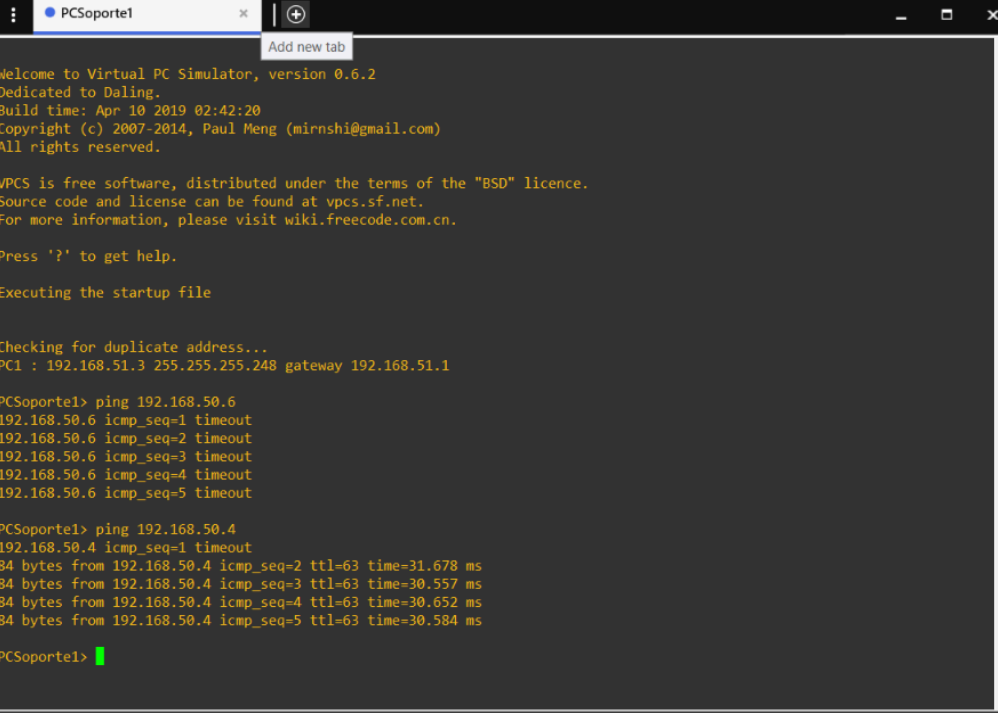

```
PCSoporte1
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.51.3 255.255.255.248 gateway 192.168.51.1

PCSoporte1> ping 192.168.50.6
192.168.50.6 icmp_seq=1 timeout
192.168.50.6 icmp_seq=2 timeout
192.168.50.6 icmp_seq=3 timeout
192.168.50.6 icmp_seq=4 timeout
192.168.50.6 icmp_seq=5 timeout

PCSoporte1> ping 192.168.50.4
192.168.50.4 icmp_seq=1 timeout
84 bytes from 192.168.50.4 icmp_seq=2 ttl=63 time=31.678 ms
84 bytes from 192.168.50.4 icmp_seq=3 ttl=63 time=30.557 ms
84 bytes from 192.168.50.4 icmp_seq=4 ttl=63 time=30.652 ms
84 bytes from 192.168.50.4 icmp_seq=5 ttl=63 time=30.584 ms


PCSoporte1>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Prueba 2 — Comunicación entre departamentos diferentes (mismo nivel)

Dispositivo origen → destino: IT → Servidores

```
ping 192.168.50.41
```

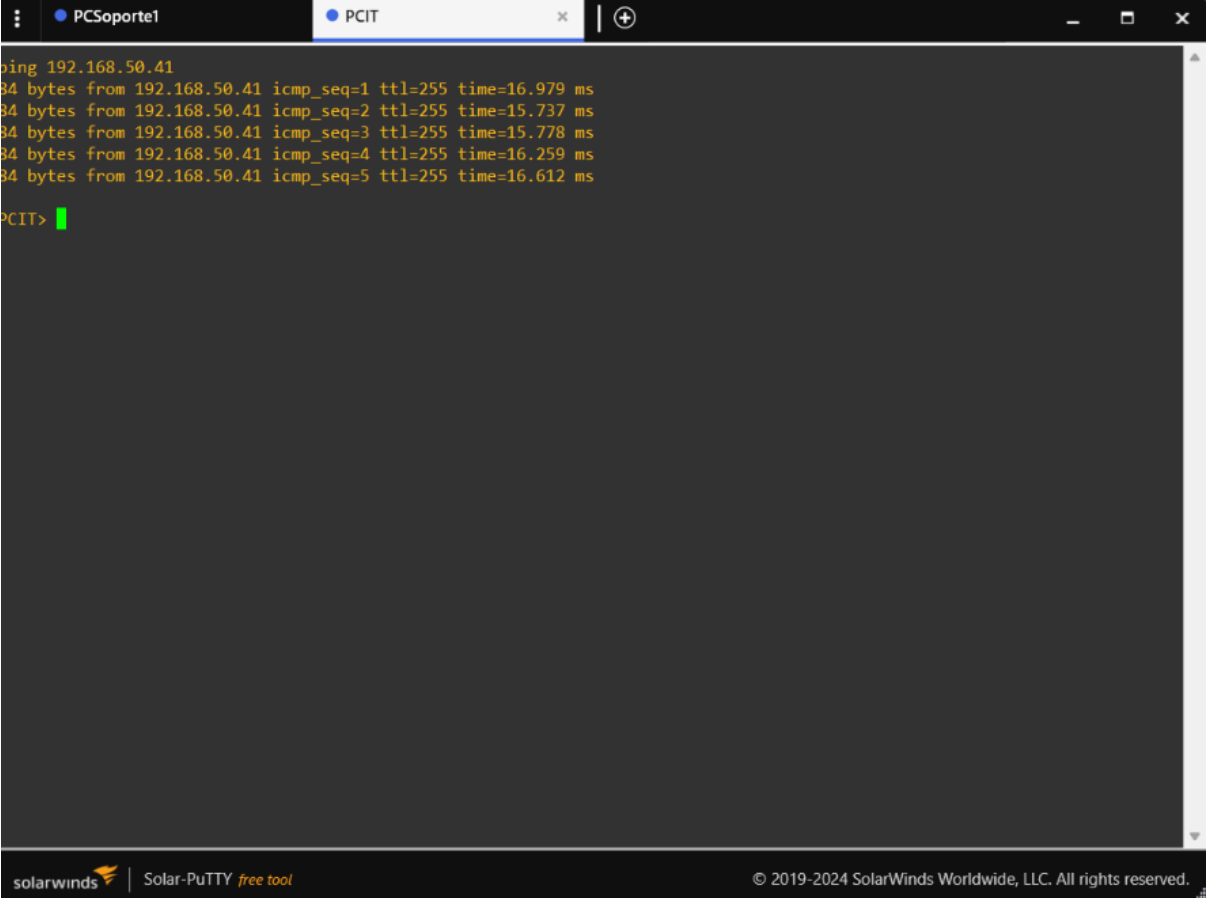

The screenshot shows a SolarWinds Solar-PuTTY terminal window with two tabs: 'PCSoporte1' and 'PCIT'. The 'PCIT' tab is active. The terminal output shows a successful ping command to 192.168.50.41. The output includes five lines of results, each showing 84 bytes from the source IP with increasing ICMP sequence numbers and round-trip times. The prompt 'PCIT>' is visible at the bottom of the terminal area.

```
ping 192.168.50.41
84 bytes from 192.168.50.41 icmp_seq=1 ttl=255 time=16.979 ms
84 bytes from 192.168.50.41 icmp_seq=2 ttl=255 time=15.737 ms
84 bytes from 192.168.50.41 icmp_seq=3 ttl=255 time=15.778 ms
84 bytes from 192.168.50.41 icmp_seq=4 ttl=255 time=16.259 ms
84 bytes from 192.168.50.41 icmp_seq=5 ttl=255 time=16.612 ms

PCIT>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Dispositivo origen → destino: Gerencia → IT

```
ping 192.168.50.1
```

```
PCSoporte1 PCIT PCGeneralManagment1 x + - □ x
ping 192.168.50.1
84 bytes from 192.168.50.1 icmp_seq=1 ttl=255 time=16.324 ms
84 bytes from 192.168.50.1 icmp_seq=2 ttl=255 time=15.799 ms
84 bytes from 192.168.50.1 icmp_seq=3 ttl=255 time=16.125 ms
84 bytes from 192.168.50.1 icmp_seq=4 ttl=255 time=15.294 ms
84 bytes from 192.168.50.1 icmp_seq=5 ttl=255 time=16.116 ms
VPCS> |
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Prueba 35 — Comunicación entre niveles

Prueba 3: Entre niveles del edificio — N1 → N2 y N1 → N3

Dispositivo origen → destino: N1 Ventas → N2 Administración

```
ping 192.168.50.65
```

```
PCSoporte1 PCIT PCGeneralManagi SalesPC1 ReceptionPC + - □ x
ping 192.168.50.65
84 bytes from 192.168.50.65 icmp_seq=1 ttl=254 time=46.182 ms
84 bytes from 192.168.50.65 icmp_seq=2 ttl=254 time=47.407 ms
84 bytes from 192.168.50.65 icmp_seq=3 ttl=254 time=46.100 ms
84 bytes from 192.168.50.65 icmp_seq=4 ttl=254 time=47.448 ms
84 bytes from 192.168.50.65 icmp_seq=5 ttl=254 time=47.002 ms
SalesPC1> |
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Dispositivo origen → destino: N1 Recepción → N3 Gerencia

ping 192.168.50.49



The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for PCSoporte1, PCIT, PCGeneralManagi, SalesPC1, and ReceptionPC. The terminal displays the output of a ping command to 192.168.50.49, showing five successful responses with varying times. The prompt is ReceptionPC>.


```
ping 192.168.50.49
84 bytes from 192.168.50.49 icmp_seq=1 ttl=253 time=77.929 ms
84 bytes from 192.168.50.49 icmp_seq=2 ttl=253 time=76.431 ms
84 bytes from 192.168.50.49 icmp_seq=3 ttl=253 time=76.188 ms
84 bytes from 192.168.50.49 icmp_seq=4 ttl=253 time=76.434 ms
84 bytes from 192.168.50.49 icmp_seq=5 ttl=253 time=76.707 ms

ReceptionPC>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Dispositivo origen → destino: N2 Contabilidad → N3 Servidores

ping 192.168.50.41

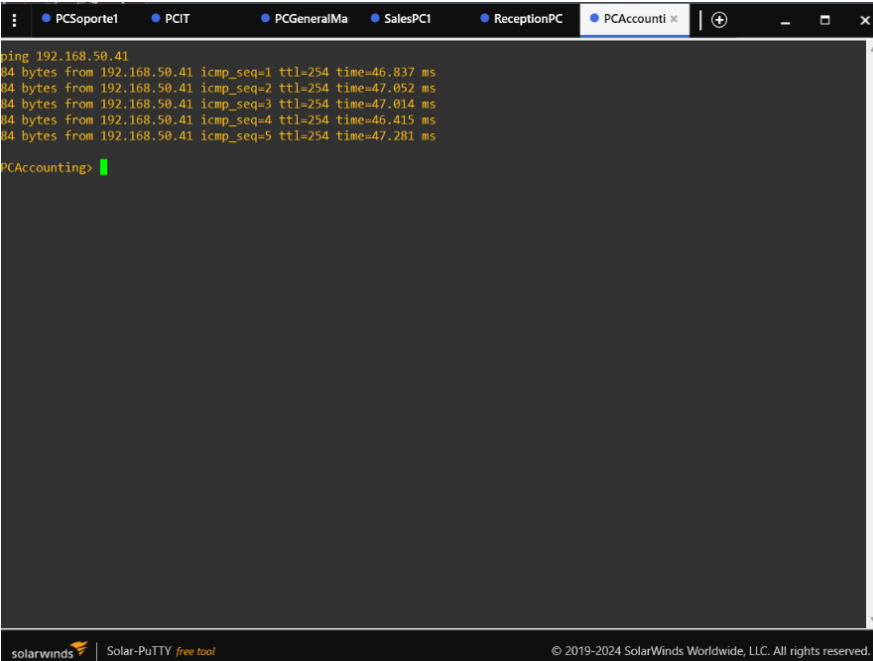

The screenshot shows a SolarWinds Solar-PuTTY terminal window with the title bar containing tabs for PCSoporte1, PCIT, PCGeneralMa, SalesPC1, ReceptionPC, and PCAccounti. The terminal displays the output of a ping command to 192.168.50.41, showing five successful responses with varying times. The prompt is PCAccounting>.

```
ping 192.168.50.41
84 bytes from 192.168.50.41 icmp_seq=1 ttl=254 time=46.837 ms
84 bytes from 192.168.50.41 icmp_seq=2 ttl=254 time=47.052 ms
84 bytes from 192.168.50.41 icmp_seq=3 ttl=254 time=47.014 ms
84 bytes from 192.168.50.41 icmp_seq=4 ttl=254 time=46.415 ms
84 bytes from 192.168.50.41 icmp_seq=5 ttl=254 time=47.281 ms


PCAccounting>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Pruebas 4 y 5 — OSPF y evidencia de rutas

En Router R1:

```
show ip ospf neighbor
```

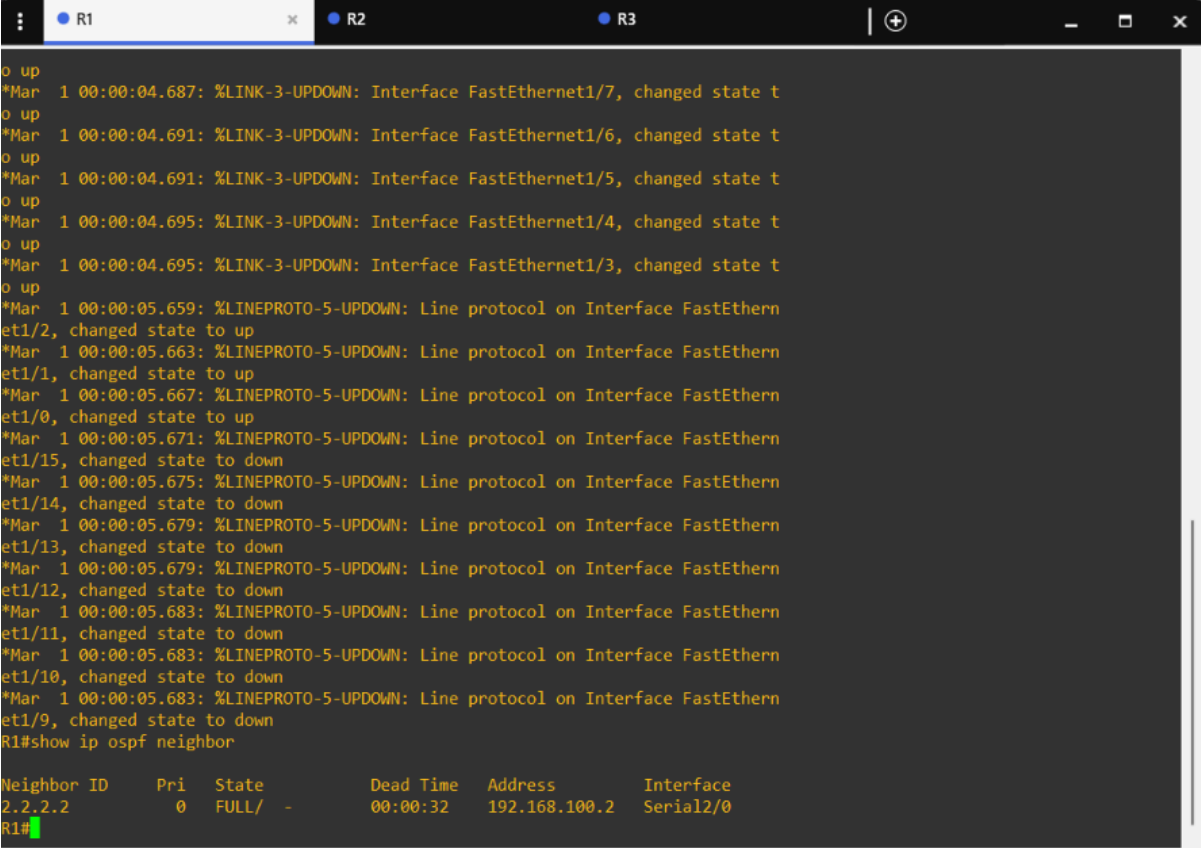

The screenshot shows a SolarWinds Solar-PuTTY terminal window with three tabs: R1, R2, and R3. The R1 tab is active, displaying a series of log messages indicating OSPF interface state changes. The messages are as follows:


- *Mar 1 00:00:04.687: %LINK-3-UPDOWN: Interface FastEthernet1/7, changed state to up
- *Mar 1 00:00:04.691: %LINK-3-UPDOWN: Interface FastEthernet1/6, changed state to up
- *Mar 1 00:00:04.691: %LINK-3-UPDOWN: Interface FastEthernet1/5, changed state to up
- *Mar 1 00:00:04.695: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state to up
- *Mar 1 00:00:04.695: %LINK-3-UPDOWN: Interface FastEthernet1/3, changed state to up
- *Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/2, changed state to up
- *Mar 1 00:00:05.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/1, changed state to up
- *Mar 1 00:00:05.667: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
- *Mar 1 00:00:05.671: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/15, changed state to down
- *Mar 1 00:00:05.675: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/14, changed state to down
- *Mar 1 00:00:05.679: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/13, changed state to down
- *Mar 1 00:00:05.679: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/12, changed state to down
- *Mar 1 00:00:05.683: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/11, changed state to down
- *Mar 1 00:00:05.683: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/10, changed state to down
- *Mar 1 00:00:05.683: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/9, changed state to down

Following the log messages, the user enters the command `R1#show ip ospf neighbor`, which produces the following output:

Neighbor ID	Pri	State	Dead Time	Address	Interface
2.2.2.2	0	FULL/ -	00:00:32	192.168.100.2	Serial2/0

The terminal window footer includes the SolarWinds logo, the text "Solar-PuTTY free tool", and the copyright notice "© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved."

```
show ip route ospf
```

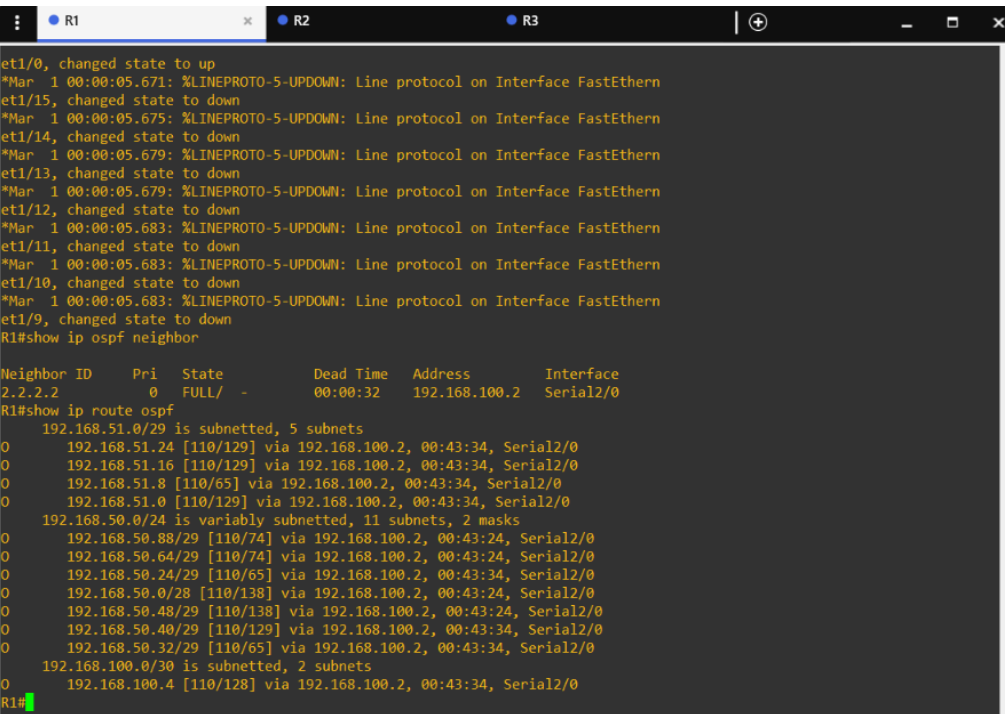


The screenshot shows the same SolarWinds Solar-PuTTY terminal window. The R1 tab is active, displaying the same log messages as the previous screenshot. The user enters the command `R1#show ip ospf neighbor`, which produces the same output as before. Then, the user enters the command `R1#show ip route ospf`, which produces the following output:

```
192.168.51.0/29 is subnetted, 5 subnets
0   192.168.51.24 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0   192.168.51.16 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0   192.168.51.8 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
0   192.168.51.0 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
192.168.50.0/24 is variably subnetted, 11 subnets, 2 masks
0   192.168.50.88/29 [110/74] via 192.168.100.2, 00:43:24, Serial2/0
0   192.168.50.64/29 [110/74] via 192.168.100.2, 00:43:24, Serial2/0
0   192.168.50.24/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
0   192.168.50.0/28 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
0   192.168.50.48/29 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
0   192.168.50.40/29 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0   192.168.50.32/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
192.168.100.0/30 is subnetted, 2 subnets
0   192.168.100.4 [110/128] via 192.168.100.2, 00:43:34, Serial2/0
```

The terminal window footer includes the SolarWinds logo, the text "Solar-PuTTY free tool", and the copyright notice "© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved."

En Router R2:

```
show ip ospf neighbor
```

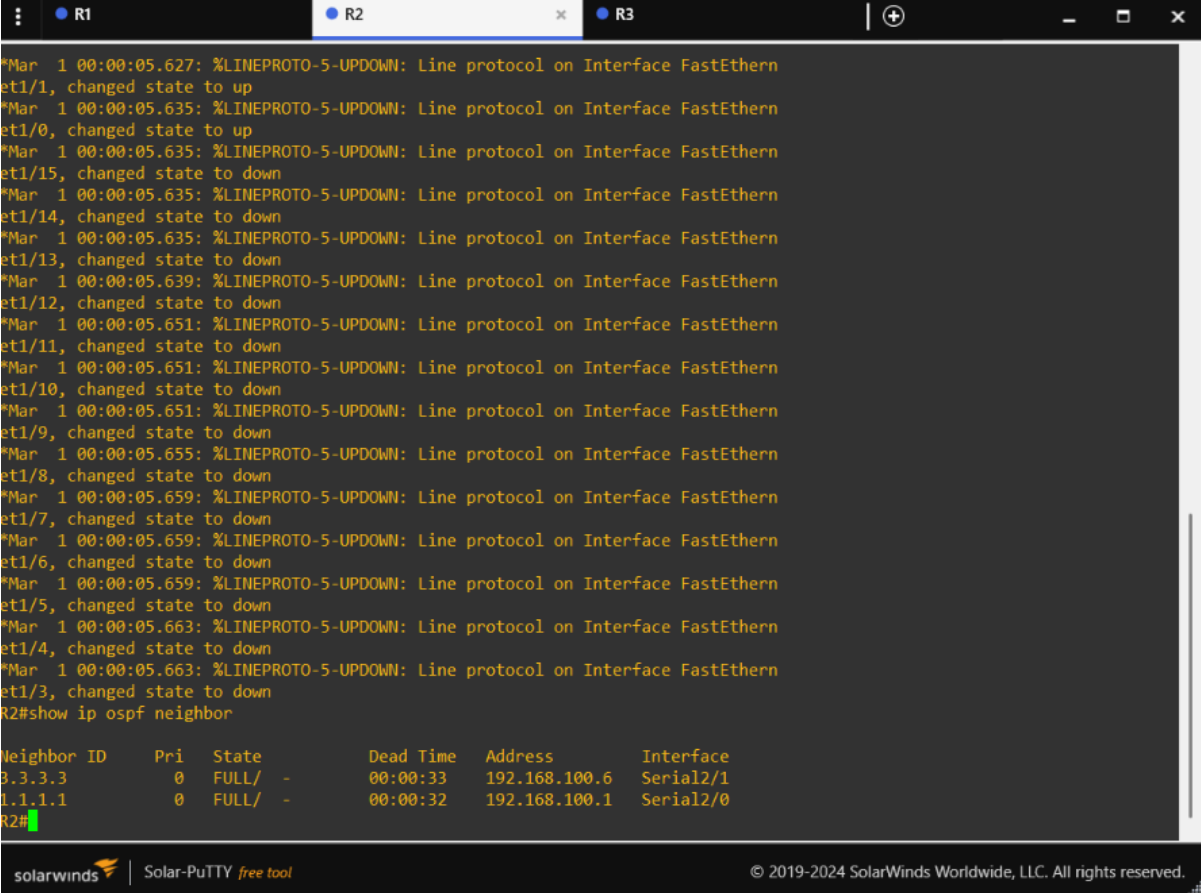

The screenshot shows a SolarWinds Solar-PuTTY terminal window with three tabs: R1, R2 (active), and R3. The terminal displays a series of log messages indicating OSPF line protocol state changes on various interfaces (FastEthernet0/1 through FastEthernet0/15). The messages are timestamped with the date and time (Mar 1 00:00:05.627 to 00:00:05.663). The messages indicate that the line protocol on these interfaces has changed state to up or down.

```
*Mar 1 00:00:05.627: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
*Mar 1 00:00:05.635: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
*Mar 1 00:00:05.635: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/15, changed state to down
*Mar 1 00:00:05.635: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/14, changed state to down
*Mar 1 00:00:05.635: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/13, changed state to down
*Mar 1 00:00:05.639: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/12, changed state to down
*Mar 1 00:00:05.651: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/11, changed state to down
*Mar 1 00:00:05.651: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/10, changed state to down
*Mar 1 00:00:05.651: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/9, changed state to down
*Mar 1 00:00:05.655: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/8, changed state to down
*Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to down
*Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/6, changed state to down
*Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to down
*Mar 1 00:00:05.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to down
*Mar 1 00:00:05.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
R2#show ip ospf neighbor
```

Neighbor ID	Pri	State	Dead Time	Address	Interface
3.3.3.3	0	FULL/ -	00:00:33	192.168.100.6	Serial2/1
1.1.1.1	0	FULL/ -	00:00:32	192.168.100.1	Serial2/0

R2#

The terminal window footer shows the SolarWinds logo, the text "Solar-PuTTY free tool", and the copyright notice "© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved."

```
show ip route ospf
```


```
R1 R2 R3
*Mar 1 00:00:05.651: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/10, changed state to down
*Mar 1 00:00:05.651: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/9, changed state to down
*Mar 1 00:00:05.655: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/8, changed state to down
*Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/7, changed state to down
*Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/6, changed state to down
*Mar 1 00:00:05.659: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/5, changed state to down
*Mar 1 00:00:05.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/4, changed state to down
*Mar 1 00:00:05.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/3, changed state to down
R2#show ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address        Interface
3.3.3.3          0     FULL/ -         00:00:33    192.168.100.6   Serial2/1
1.1.1.1          0     FULL/ -         00:00:32    192.168.100.1   Serial2/0
R2#show ip route ospf
    192.168.51.0/29 is subnetted, 5 subnets
0       192.168.51.24 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
0       192.168.51.16 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
0       192.168.51.0 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
0       192.168.51.32 [110/74] via 192.168.100.1, 00:46:35, Serial2/0
    192.168.50.0/24 is variably subnetted, 11 subnets, 2 masks
0       192.168.50.80/29 [110/65] via 192.168.100.1, 00:46:35, Serial2/0
0       192.168.50.72/29 [110/74] via 192.168.100.1, 00:46:35, Serial2/0
0       192.168.50.16/29 [110/65] via 192.168.100.1, 00:46:35, Serial2/0
0       192.168.50.0/28 [110/74] via 192.168.100.6, 00:46:35, Serial2/1
0       192.168.50.56/29 [110/65] via 192.168.100.1, 00:46:35, Serial2/0
0       192.168.50.48/29 [110/74] via 192.168.100.6, 00:46:35, Serial2/1
0       192.168.50.40/29 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
R2#
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

En Router R3:

```
show ip ospf neighbor
```

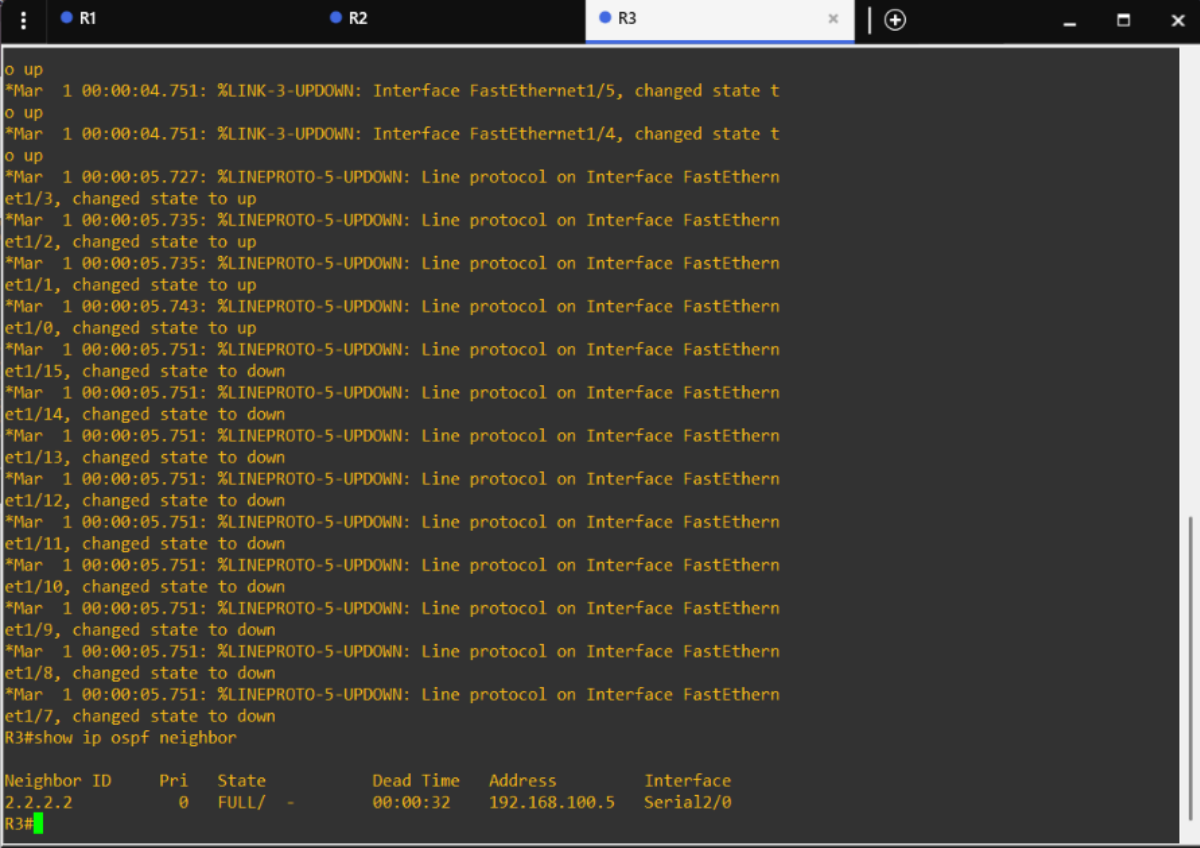

The screenshot shows a SolarWinds Solar-PuTTY terminal window with three tabs labeled R1, R2, and R3. The R3 tab is active. The terminal displays a series of log messages indicating OSPF interface state changes for various FastEthernet interfaces (FastEthernet1/5 through 1/15). The messages are timestamped with 'Mar 1 00:00:04.751' and 'Mar 1 00:00:05.727' through 'Mar 1 00:00:05.751'. The messages indicate that the line protocol on these interfaces has changed state to up or down. Below the log messages, the user has entered the command 'show ip ospf neighbor'. The output of this command is displayed as a table with the following columns: Neighbor ID, Pri, State, Dead Time, Address, and Interface. The output shows a single neighbor with ID 2.2.2, priority 0, state FULL/-, dead time 00:00:32, address 192.168.100.5, and interface Serial12/0. The terminal window has a dark background and a light-colored text. The SolarWinds logo and 'Solar-PuTTY free tool' are visible in the bottom left corner, and the copyright notice '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.' is in the bottom right corner.

```
o up
*Mar 1 00:00:04.751: %LINK-3-UPDOWN: Interface FastEthernet1/5, changed state t
o up
*Mar 1 00:00:04.751: %LINK-3-UPDOWN: Interface FastEthernet1/4, changed state t
o up
*Mar 1 00:00:05.727: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/3, changed state to up
*Mar 1 00:00:05.735: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/2, changed state to up
*Mar 1 00:00:05.735: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/1, changed state to up
*Mar 1 00:00:05.743: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/0, changed state to up
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/15, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/14, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/13, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/12, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/11, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/10, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/9, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/8, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthern
et1/7, changed state to down
R3#show ip ospf neighbor

Neighbor ID    Pri   State           Dead Time   Address        Interface
2.2.2.2        0     FULL/-          00:00:32    192.168.100.5  Serial12/0
R3#
```

```
show ip route ospf
```

```
R1 R2 R3
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/14, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/13, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/12, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/11, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/10, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/9, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/8, changed state to down
*Mar 1 00:00:05.751: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/7, changed state to down
R3#show ip ospf neighbor

Neighbor ID      Pri   State           Dead Time   Address        Interface
2.2.2.2          0    FULL/ -         00:00:32    192.168.100.5  Serial2/0
R3#show ip route ospf
    192.168.51.0/29 is subnetted, 5 subnets
O       192.168.51.8 [110/65] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.51.32 [110/138] via 192.168.100.5, 00:47:17, Serial2/0
    192.168.50.0/24 is variably subnetted, 11 subnets, 2 masks
O       192.168.50.88/29 [110/74] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.50.80/29 [110/129] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.50.72/29 [110/138] via 192.168.100.5, 00:47:17, Serial2/0
O       192.168.50.64/29 [110/74] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.50.24/29 [110/65] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.50.16/29 [110/129] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.50.56/29 [110/129] via 192.168.100.5, 00:47:27, Serial2/0
O       192.168.50.32/29 [110/65] via 192.168.100.5, 00:47:27, Serial2/0
    192.168.100.0/30 is subnetted, 2 subnets
O       192.168.100.0 [110/128] via 192.168.100.5, 00:47:27, Serial2/0
R3#
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.


Prueba 6 — Evidencia de conectividad exitosa (0% loss)

Comando: ping 192.168.50.17 -c 5

```
ping 192.168.50.17 -c 5
```

```
ping 192.168.50.65 -c 5
```

```
ping 192.168.50.49 -c 5
```

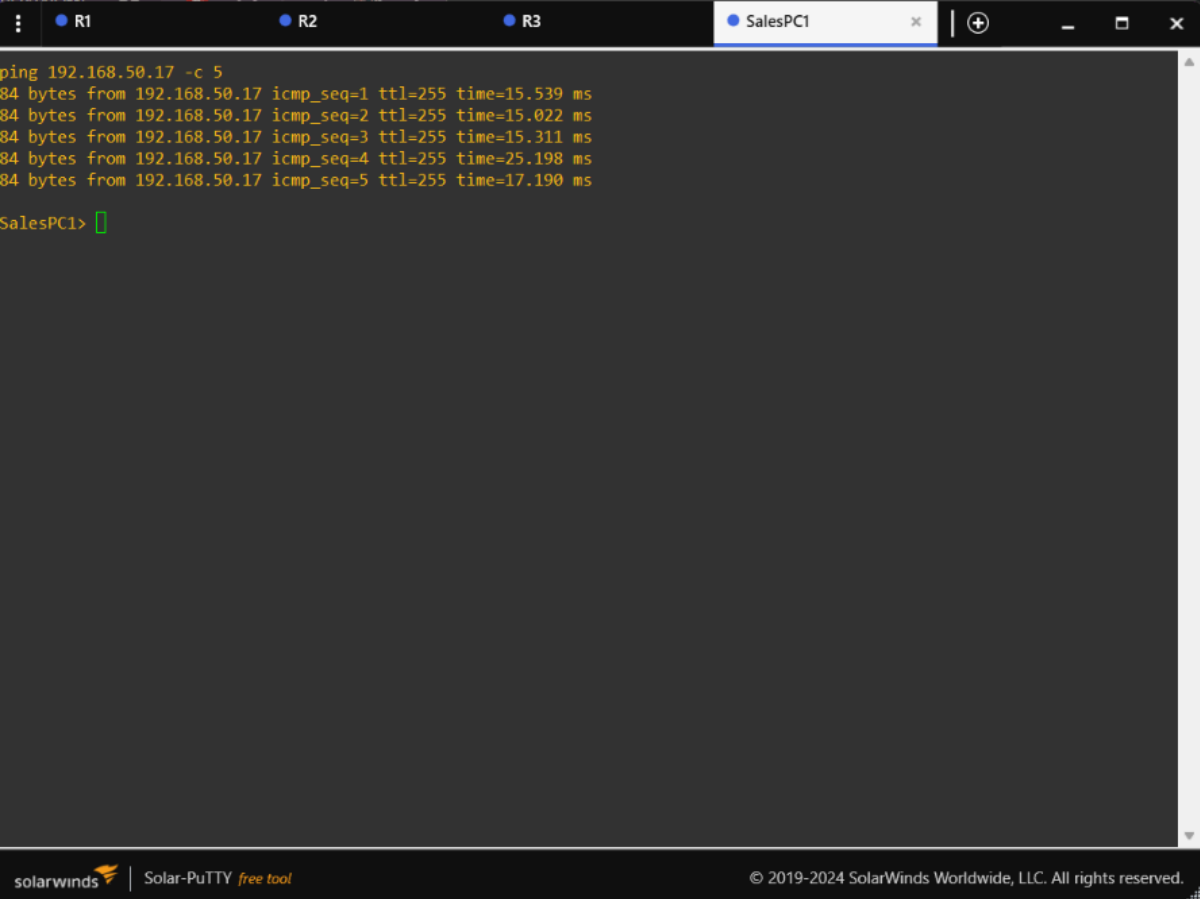

The screenshot shows a SolarWinds Solar-PuTTY terminal window with a dark background. The window title bar includes tabs for 'R1', 'R2', 'R3', and 'SalesPC1'. The terminal content shows the execution of the command 'ping 192.168.50.17 -c 5'. The output displays five successful ping responses, each showing '84 bytes from 192.168.50.17' followed by 'icmp_seq=1' through 'icmp_seq=5', 'ttl=255', and a time value. The prompt 'SalesPC1>' is visible at the bottom of the terminal area. The footer of the window contains the SolarWinds logo, the text 'Solar-PuTTY free tool', and the copyright notice '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
ping 192.168.50.17 -c 5
84 bytes from 192.168.50.17 icmp_seq=1 ttl=255 time=15.539 ms
84 bytes from 192.168.50.17 icmp_seq=2 ttl=255 time=15.022 ms
84 bytes from 192.168.50.17 icmp_seq=3 ttl=255 time=15.311 ms
84 bytes from 192.168.50.17 icmp_seq=4 ttl=255 time=25.198 ms
84 bytes from 192.168.50.17 icmp_seq=5 ttl=255 time=17.190 ms
SalesPC1>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```

R1 R2 R3 SalesPC1 PCAdmin1
ping 192.168.50.65 -c 5
84 bytes from 192.168.50.65 icmp_seq=1 ttl=255 time=15.813 ms
84 bytes from 192.168.50.65 icmp_seq=2 ttl=255 time=16.294 ms
84 bytes from 192.168.50.65 icmp_seq=3 ttl=255 time=15.985 ms
84 bytes from 192.168.50.65 icmp_seq=4 ttl=255 time=15.513 ms
84 bytes from 192.168.50.65 icmp_seq=5 ttl=255 time=16.458 ms
PCAdmin1>
solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.
```

R1

R2

R3

SalesPC1

PCAdmin1

PCGeneralN

ping 192.168.50.49 -c 5

84 bytes from 192.168.50.49 icmp_seq=1 ttl=255 time=15.894 ms

84 bytes from 192.168.50.49 icmp_seq=2 ttl=255 time=16.296 ms

84 bytes from 192.168.50.49 icmp_seq=3 ttl=255 time=17.067 ms

84 bytes from 192.168.50.49 icmp_seq=4 ttl=255 time=15.283 ms

84 bytes from 192.168.50.49 icmp_seq=5 ttl=255 time=15.404 ms

PCS>

PCGeneralManagment1

solarwinds


Solar-PuTTY free tool

© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Pruebas 7 y 8 — Viaje de paquetes e identificación de routers

Desde N1 hacia N3 (debe pasar por R1 → R2 → R3):

```
trace 192.168.50.49
```

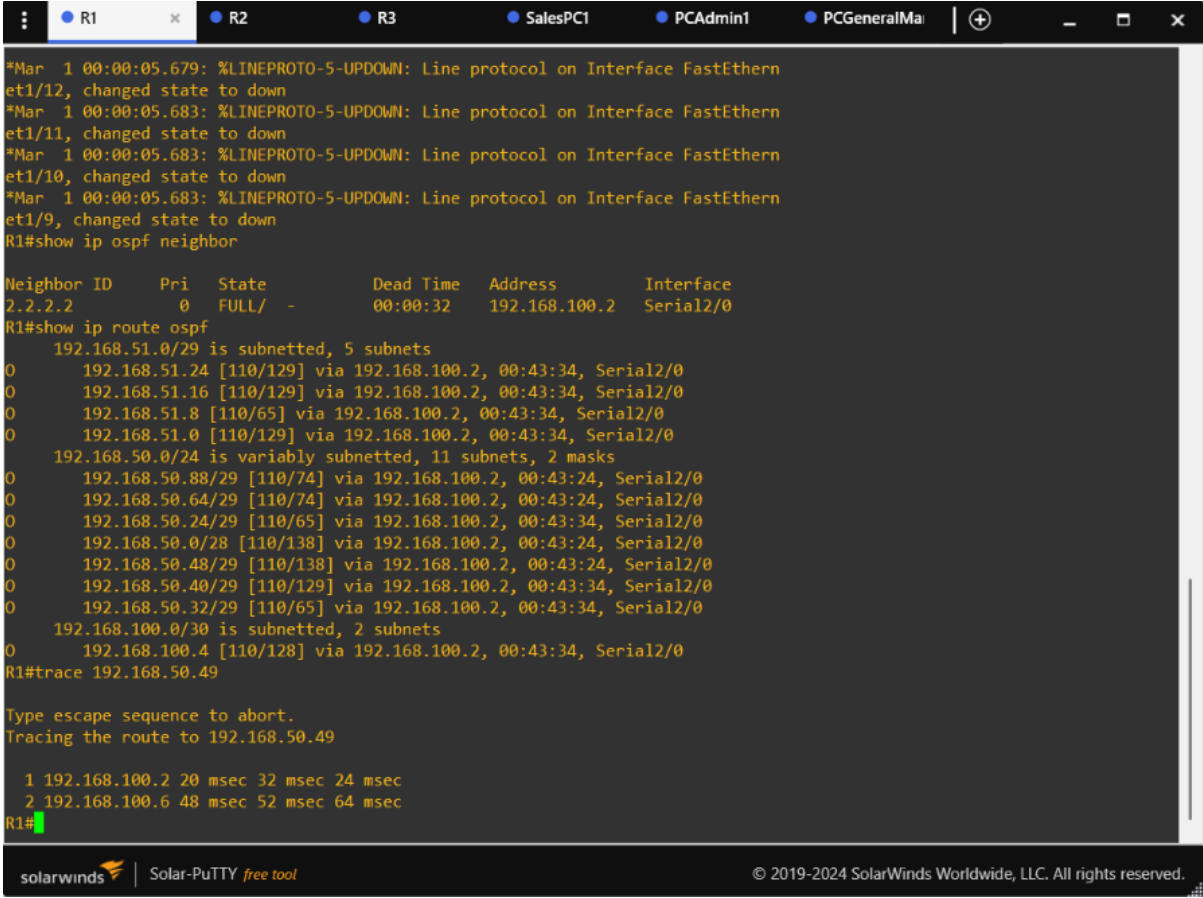

The screenshot shows a SolarWinds Solar-PuTTY terminal window with tabs for R1, R2, R3, SalesPC1, PCAdmin1, and PCGeneralMa. The terminal output on R1 shows several log messages about line protocol down events on interfaces FastEthernet et1/12, et1/11, et1/10, and et1/9. The user then enters the command 'show ip ospf neighbor', which displays a table of OSPF neighbors. The table has columns for Neighbor ID, Pri, State, Dead Time, Address, and Interface. The only neighbor listed is 2.2.2.2 with a state of FULL/- and a dead time of 00:00:32, connected via Serial2/0. The user then enters 'show ip route ospf', which displays the OSPF routing table. The table shows routes for 192.168.51.0/29 (5 subnets) and 192.168.50.0/24 (11 subnets, 2 masks). The routes are listed with their next hops and interfaces. The user then enters 'trace 192.168.50.49', which starts a trace of the route to 192.168.50.49. The trace shows two hops: 1. 192.168.100.2 (20 msec, 32 msec, 24 msec) and 2. 192.168.100.6 (48 msec, 52 msec, 64 msec). The terminal window has a footer with the SolarWinds logo, 'Solar-PuTTY free tool', and the copyright notice '© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.'

```
*Mar 1 00:00:05.679: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/12, changed state to down
*Mar 1 00:00:05.683: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/11, changed state to down
*Mar 1 00:00:05.683: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/10, changed state to down
*Mar 1 00:00:05.683: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet
et1/9, changed state to down
R1#show ip ospf neighbor

Neighbor ID    Pri   State           Dead Time   Address        Interface
2.2.2.2        0     FULL/-          00:00:32    192.168.100.2  Serial2/0
R1#show ip route ospf
 192.168.51.0/29 is subnetted, 5 subnets
O       192.168.51.24 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
O       192.168.51.16 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
O       192.168.51.8 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
O       192.168.51.0 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
 192.168.50.0/24 is variably subnetted, 11 subnets, 2 masks
O       192.168.50.88/29 [110/74] via 192.168.100.2, 00:43:24, Serial2/0
O       192.168.50.64/29 [110/74] via 192.168.100.2, 00:43:24, Serial2/0
O       192.168.50.24/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
O       192.168.50.0/28 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
O       192.168.50.48/29 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
O       192.168.50.40/29 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
O       192.168.50.32/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
 192.168.100.0/30 is subnetted, 2 subnets
O       192.168.100.4 [110/128] via 192.168.100.2, 00:43:34, Serial2/0
R1#trace 192.168.50.49

Type escape sequence to abort.
Tracing the route to 192.168.50.49

 0  192.168.100.2 [M/LL] via 192.168.100.2, 00:43:34, Serial2/0
  1 192.168.100.2 20 msec 32 msec 24 msec
  2 192.168.100.6 48 msec 52 msec 64 msec
R1#
```

Desde N1 hacia N2 (debe pasar por R1 → R2):

```
trace 192.168.50.65
```

```
R1 R2 R3 SalesPC1 PCAdmin1 PCGeneralMa
R1#show ip ospf neighbor
Neighbor ID Pri State Dead Time Address Interface
2.2.2.2 0 FULL/ - 00:00:32 192.168.100.2 Serial2/0
R1#show ip route ospf
192.168.51.0/29 is subnetted, 5 subnets
0 192.168.51.24 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.51.16 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.51.8 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.51.0 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
192.168.50.0/24 is variably subnetted, 11 subnets, 2 masks
0 192.168.50.88/29 [110/74] via 192.168.100.2, 00:43:24, Serial2/0
0 192.168.50.64/29 [110/74] via 192.168.100.2, 00:43:24, Serial2/0
0 192.168.50.24/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.50.0/28 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
0 192.168.50.48/29 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
0 192.168.50.40/29 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.50.32/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
192.168.100.0/30 is subnetted, 2 subnets
0 192.168.100.4 [110/128] via 192.168.100.2, 00:43:34, Serial2/0
R1#trace 192.168.50.49
Type escape sequence to abort.
Tracing the route to 192.168.50.49
 1 192.168.100.2 20 msec 32 msec 24 msec
 2 192.168.100.6 48 msec 52 msec 64 msec
R1#trace 192.168.50.65
Type escape sequence to abort.
Tracing the route to 192.168.50.65
 1 192.168.100.2 40 msec 32 msec 28 msec
R1#
R1#
R1#
```

Interfaces de cada router:

```
show ip interface brief
```

```
R1 R2 R3 SalesPC1 PCAdmin1 PCGeneralMa
0 192.168.50.24/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.50.0/28 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
0 192.168.50.48/29 [110/138] via 192.168.100.2, 00:43:24, Serial2/0
0 192.168.50.40/29 [110/129] via 192.168.100.2, 00:43:34, Serial2/0
0 192.168.50.32/29 [110/65] via 192.168.100.2, 00:43:34, Serial2/0
    192.168.100.0/30 is subnetted, 2 subnets
0 192.168.100.4 [110/128] via 192.168.100.2, 00:43:34, Serial2/0
R1#trace 192.168.50.49
Type escape sequence to abort.
Tracing the route to 192.168.50.49
    1 192.168.100.2 20 msec 32 msec 24 msec
    2 192.168.100.6 48 msec 52 msec 64 msec
R1#trace 192.168.50.65
Type escape sequence to abort.
Tracing the route to 192.168.50.65
    1 192.168.100.2 40 msec 32 msec 28 msec
R1#
R1#
R1#show ip interface brief
Interface IP-Address OK? Method Status Protocol
FastEthernet0/0 192.168.51.33 YES NVRAM up up
FastEthernet0/1 192.168.50.73 YES NVRAM up up
FastEthernet1/0 192.168.50.17 YES NVRAM up up
FastEthernet1/1 192.168.50.57 YES NVRAM up up
FastEthernet1/2 192.168.50.81 YES NVRAM up up
FastEthernet1/3 unassigned YES unset up down
FastEthernet1/4 unassigned YES unset up down
FastEthernet1/5 unassigned YES unset up down
FastEthernet1/6 unassigned YES unset up down
FastEthernet1/7 unassigned YES unset up down
FastEthernet1/8 unassigned YES unset up down
--More--
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
R1 R2 R3 SalesPC1 PCAdmin1 PCGeneralMa
et1/4, changed state to down
*Mar 1 00:00:05.663: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/3, changed state to down
R2#show ip ospf neighbor
Neighbor ID Pri State Dead Time Address Interface
3.3.3.3 0 FULL/- 00:00:33 192.168.100.6 Serial2/1
1.1.1.1 0 FULL/- 00:00:32 192.168.100.1 Serial2/0
R2#show ip route ospf
    192.168.51.0/29 is subnetted, 5 subnets
0 192.168.51.24 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
0 192.168.51.16 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
0 192.168.51.0 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
0 192.168.51.32 [110/74] via 192.168.100.1, 00:46:35, Serial2/0
    192.168.50.0/24 is variably subnetted, 11 subnets, 2 masks
0 192.168.50.80/29 [110/65] via 192.168.100.1, 00:46:35, Serial2/0
0 192.168.50.72/29 [110/74] via 192.168.100.1, 00:46:35, Serial2/0
0 192.168.50.16/29 [110/65] via 192.168.100.1, 00:46:35, Serial2/0
0 192.168.50.0/28 [110/74] via 192.168.100.6, 00:46:35, Serial2/1
0 192.168.50.56/29 [110/65] via 192.168.100.1, 00:46:35, Serial2/0
0 192.168.50.48/29 [110/74] via 192.168.100.6, 00:46:35, Serial2/1
0 192.168.50.40/29 [110/65] via 192.168.100.6, 00:46:35, Serial2/1
R2#show ip interface brief
Interface IP-Address OK? Method Status Protocol
FastEthernet0/0 192.168.50.89 YES NVRAM up up
FastEthernet0/1 192.168.50.65 YES NVRAM up up
FastEthernet1/0 192.168.50.25 YES NVRAM up up
FastEthernet1/1 192.168.50.33 YES NVRAM up up
FastEthernet1/2 192.168.51.9 YES NVRAM up up
FastEthernet1/3 unassigned YES unset up down
FastEthernet1/4 unassigned YES unset up down
FastEthernet1/5 unassigned YES unset up down
FastEthernet1/6 unassigned YES unset up down
FastEthernet1/7 unassigned YES unset up down
FastEthernet1/8 unassigned YES unset up down
--More--
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Prueba 9 — Posibles fallos y limitaciones del diseño


Descripción de limitaciones identificadas:

- Si el Router R2 cae, los niveles N1 y N3 pierden comunicación entre sí hasta que OSPF recalcula la ruta (10-40 segundos).
- Los Access Points no tienen redundancia; si uno falla, el área inalámbrica correspondiente queda sin cobertura.

Prueba 10 — Verificación del subneteo VLSM

Departamento	Subred	Rango válido	IP mostrada (show ip)
IT / Soporte	192.168.50.0/28	.1 — .14	Soporte: 192.168.51.3/29 192.168.51.2/29 IT: 192.168.50.2/28 192.168.50.3/28 192.168.50.4/28
Ventas	192.168.50.16/29	.17 — .22	192.168.50.18/29 192.168.50.19/29
Recursos Humanos	192.168.50.24/29	.25 — .30	192.168.50.26/29 192.168.50.27/29
Contabilidad	192.168.50.32/29	.33 — .38	192.168.50.34/29
Servidores	192.168.50.40/29	.41 — .46	192.168.50.45/29
Gerencia	192.168.50.48/29	.49 — .54	192.168.50.50/29 192.168.50.51/29
Atención al Cliente	192.168.50.56/29	.57 — .62	192.168.50.58/29 192.168.50.59/29
Administración	192.168.50.64/29	.65 — .70	192.168.50.66/29 192.168.50.67/29
Recepción	192.168.50.72/29	.73 — .78	192.168.50.74/29
Cámaras de Seguridad	192.168.50.80/29	.81 — .86	192.168.50.82/29 192.168.51.10/29 192.168.51.18/29
Sala de Reuniones	192.168.50.88/29	.89 — .94	192.168.50.90/29
Red Invitados (WiFi)	192.168.50.96/29	.97 — .102	_____

IT/Soporte:

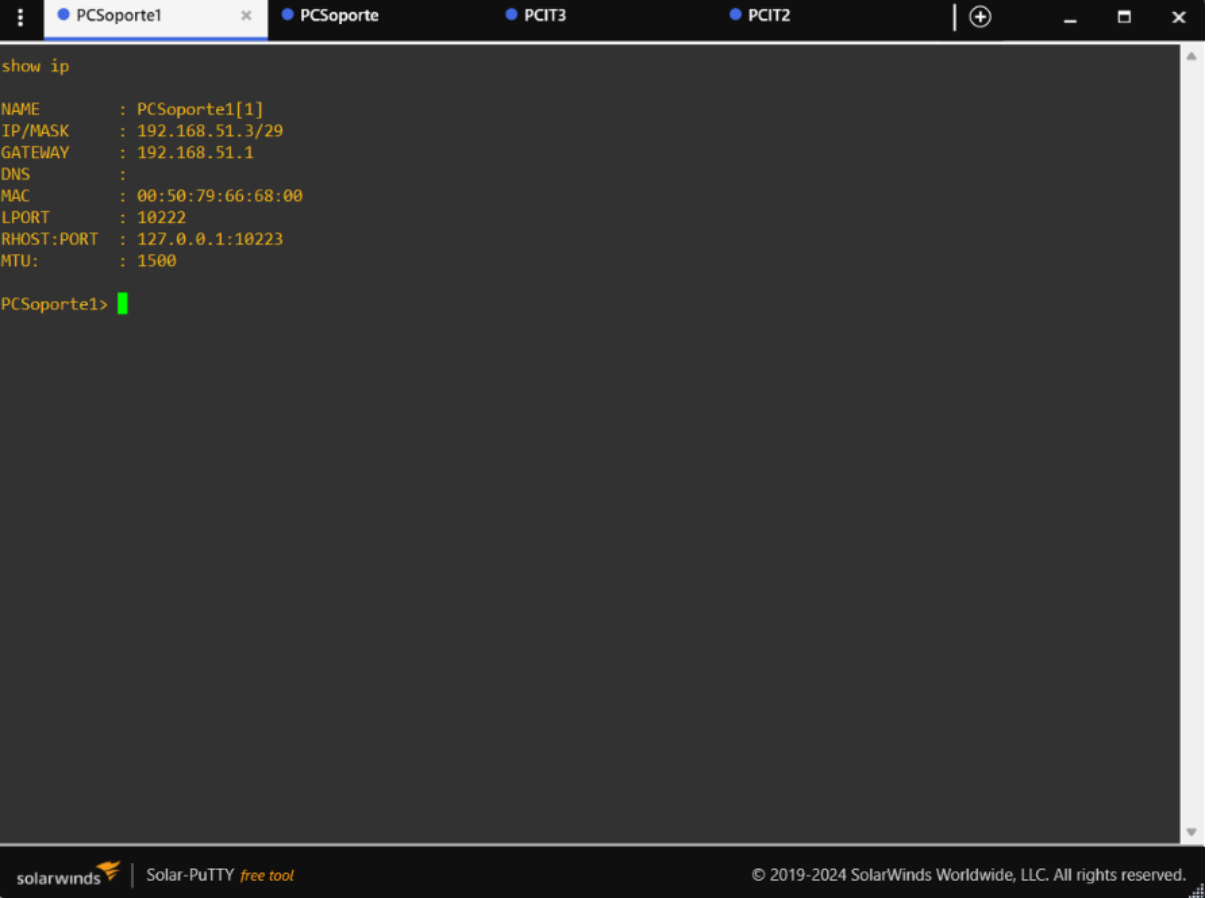

The image shows a SolarWinds Solar-PuTTY terminal window with four tabs: PCSoporte1, PCSoporte, PCIT3, and PCIT2. The PCSoporte1 tab is active and displays the output of the 'show ip' command. The output lists network details for PCSoporte1[1], including IP/MASK (192.168.51.3/29), GATEWAY (192.168.51.1), DNS, MAC (00:50:79:66:68:00), LPORT (10222), RHOST:PORT (127.0.0.1:10223), and MTU (1500). The prompt 'PCSoporte1>' is visible with a green cursor. The bottom status bar includes the SolarWinds logo, 'Solar-PuTTY free tool', and a copyright notice for 2019-2024 SolarWinds Worldwide, LLC.

```
show ip  
NAME      : PCSoporte1[1]  
IP/MASK    : 192.168.51.3/29  
GATEWAY    : 192.168.51.1  
DNS        :  
MAC        : 00:50:79:66:68:00  
LPORT      : 10222  
RHOST:PORT : 127.0.0.1:10223  
MTU        : 1500  
PCSoporte1>
```

solarwinds | Solar-PuTTY free tool | © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.


```
PCSoporte1 PCSoporte PCIT3 PCIT2
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.51.2 255.255.255.248 gateway 192.168.51.1

PCSoporte> show ip

NAME       : PCSoporte[1]
IP/MASK    : 192.168.51.2/29
GATEWAY    : 192.168.51.1
DNS        :
MAC        : 00:50:79:66:68:01
LPORT     : 10220
RHOST:PORT : 127.0.0.1:10221
MTU        : 1500

PCSoporte>
PCSoporte>
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCSoporte1 PCSoporte PCIT3 PCIT2
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.4 255.255.255.240 gateway 192.168.50.1

PCIT3> show ip

NAME       : PCIT3[1]
IP/MASK    : 192.168.50.4/28
GATEWAY    : 192.168.50.1
DNS        :
MAC        : 00:50:79:66:68:08
LPORT     : 10238
RHOST:PORT : 127.0.0.1:10239
MTU        : 1500

PCIT3>
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCSoporte1 PCSoporte PCIT3 PCIT2
show ip
NAME      : PCIT2[1]
IP/MASK    : 192.168.50.3/28
GATEWAY    : 192.168.50.1
DNS        :
MAC        : 00:50:79:66:68:24
LPORT     : 10236
RHOST:PORT : 127.0.0.1:10237
MTU        : 1500
PCIT2>
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCIT
show ip
NAME      : PCIT[1]
IP/MASK    : 192.168.50.2/28
GATEWAY    : 192.168.50.1
DNS        :
MAC        : 00:50:79:66:68:2a
LPORT     : 10234
RHOST:PORT : 127.0.0.1:10235
MTU        : 1500
PCIT>
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Ventas:



The image shows a SolarWinds Solar-PuTTY terminal window with two tabs: 'PCIT' and 'SalesPC1'. The 'SalesPC1' tab is active. The terminal displays the output of the 'show ip' command, showing network configuration details for SalesPC1. The configuration includes the device name, IP address, mask, gateway, DNS, MAC address, loopback port, remote host and port, and MTU. The prompt 'SalesPC1>' is visible at the bottom of the terminal area.

```
show ip  
NAME       : SalesPC1[1]  
IP/MASK    : 192.168.50.18/29  
GATEWAY    : 192.168.50.17  
DNS        :  
MAC        : 00:50:79:66:68:16  
LPORT      : 10162  
RHOST:PORT : 127.0.0.1:10163  
MTU        : 1500  
SalesPC1>
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.19 255.255.255.248 gateway 192.168.50.17

SalesPC2> show ip

NAME      : SalesPC2[1]
IP/MASK    : 192.168.50.19/29
GATEWAY    : 192.168.50.17
DNS        :
MAC        : 00:50:79:66:68:22
LPORT     : 10166
RHOST:PORT : 127.0.0.1:10167
MTU        : 1500

SalesPC2> 
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Recursos Humanos

```

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.26 255.255.255.248 gateway 192.168.50.25

PCRRHH> show ip

NAME       : PCRRHH[1]
IP/MASK     : 192.168.50.26/29
GATEWAY     : 192.168.50.25
DNS         :
MAC         : 00:50:79:66:68:21
LPORT      : 10190
RHOST:PORT  : 127.0.0.1:10191
MTU         : 1500

PCRRHH> █

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.
```

```
ps ip
Cannot resolve 192.168.50.25ps
PCRRHH1> show ip
NAME      : PCRRHH1[1]
IP/MASK    : 192.168.50.27/29
GATEWAY    : 192.168.50.25
DNS        :
MAC        : 00:50:79:66:68:15
LPORT      : 10192
RHOST:PORT : 127.0.0.1:10193
MTU:       : 1500
PCRRHH1> █
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Contabilidad

```
PCMeetingRoom  PCAccounting  +
show ip
NAME       : PCAccounting[1]
IP/MASK     : 192.168.50.34/29
GATEWAY     : 192.168.50.33
DNS         :
MAC         : 00:50:79:66:68:06
LPORT      : 10202
RHOST:PORT  : 127.0.0.1:10203
MTU         : 1500

PCAccounting>
PCAccounting> █
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Servidores

```
PCServer x | +

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.45 255.255.255.248 gateway 192.168.50.41

PCServer> show ip

NAME      : PCServer[1]
IP/MASK    : 192.168.50.45/29
GATEWAY    : 192.168.50.41
DNS        :
MAC        : 00:50:79:66:68:23
LPORT     : 10224
RHOST:PORT : 127.0.0.1:10225
MTU        : 1500

PCServer>
PCServer> █
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Gerencia


```
PCGeneralManagment1 PCGeneralManagment x + - □ x

Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.50 255.255.255.248 gateway 192.168.50.49

VPCS> show ip

NAME      : VPCS[1]
IP/MASK    : 192.168.50.50/29
GATEWAY    : 192.168.50.49
DNS        :
MAC        : 00:50:79:66:68:1b
LPORT     : 10242
RHOST:PORT : 127.0.0.1:10243
MTU        : 1500

VPCS>
VPCS> █
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCGeneralManagment1 x PCGeneralManagment +
show ip
NAME      : VPCS[1]
IP/MASK    : 192.168.50.51/29
GATEWAY    : 192.168.50.49
DNS        :
MAC        : 00:50:79:66:68:1f
LPORT     : 10240
RHOST:PORT : 127.0.0.1:10241
MTU        : 1500

VPCS>
VPCS> 
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Atención al Cliente

The image shows a SolarWinds Solar-PuTTY terminal window. The title bar at the top contains four tabs: 'CostumerServicePC1' (active), 'CostumerServicePC2', 'ReceptionPC', and 'PCRedRoom'. The terminal area has a dark background with yellow text. The command 'show ip' has been entered, and the output displays network details for VPCS[1]. At the bottom of the terminal, the prompt 'VPCS>' is followed by a green cursor. The footer of the window includes the SolarWinds logo, the text 'Solar-PuTTY free tool', and a copyright notice for SolarWinds Worldwide, LLC.

```
show ip  
NAME      : VPCS[1]  
IP/MASK    : 192.168.50.58/29  
GATEWAY    : 192.168.50.57  
DNS        :  
MAC        : 00:50:79:66:68:0f  
LPORT     : 10182  
RHOST:PORT : 127.0.0.1:10183  
MTU        : 1500  
  
VPCS> █
```

solarwinds | Solar-PuTTY *free tool* © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

The screenshot shows a SolarWinds Solar-PuTTY terminal window with four tabs: CostumerServicePC1, CostumerServicePC2 (active), ReceptionPC, and PCRedRoom. The terminal displays the following text:

```
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.59 255.255.255.248 gateway 192.168.50.57

VPCS> show ip

NAME      : VPCS[1]
IP/MASK    : 192.168.50.59/29
GATEWAY    : 192.168.50.57
DNS        :
MAC        : 00:50:79:66:68:12
LPORT     : 10188
RHOST:PORT : 127.0.0.1:10189
MTU        : 1500

VPCS> 
```

The bottom of the window features the SolarWinds logo, the text "Solar-PuTTY free tool", and a copyright notice: "© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved."

Administración

```
PCAdmin2 PCAdmin1 PCMeetingRoom PCAccounting
show ip
NAME      : PCAdmin1[1]
IP/MASK    : 192.168.50.66/29
GATEWAY    : 192.168.50.65
DNS        :
MAC        : 00:50:79:66:68:09
LPORT     : 10204
RHOST:PORT : 127.0.0.1:10205
MTU        : 1500
PCAdmin1>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
PCAdmin2 PCAdmin1 PCMeetingRoom PCAccounting
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.


Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.67 255.255.255.248 gateway 192.168.50.65

PCAdmin2> show ip
NAME      : PCAdmin2[1]
IP/MASK    : 192.168.50.67/29
GATEWAY    : 192.168.50.65
DNS        :
MAC        : 00:50:79:66:68:0e
LPORT     : 10206
RHOST:PORT : 127.0.0.1:10207
MTU        : 1500
PCAdmin2>
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Recepción

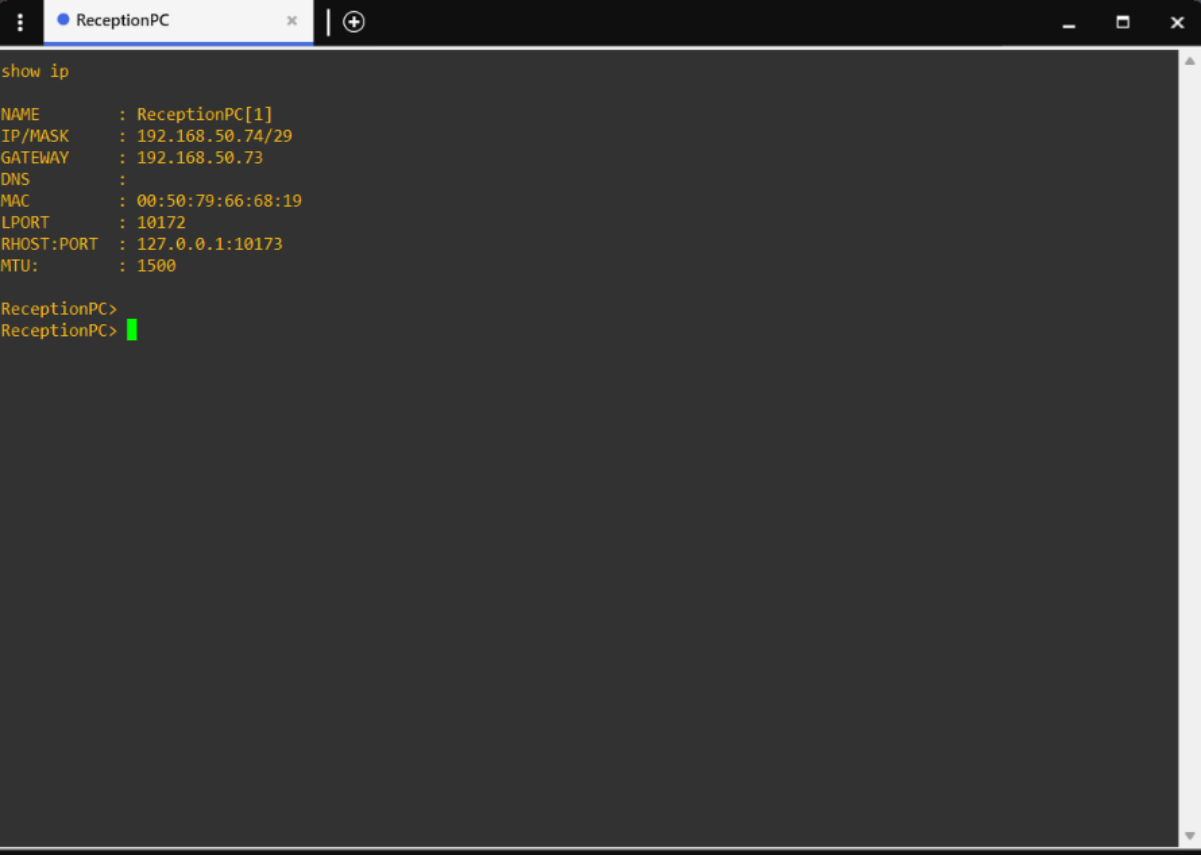

```
ReceptionPC
show ip
NAME      : ReceptionPC[1]
IP/MASK    : 192.168.50.74/29
GATEWAY    : 192.168.50.73
DNS        :
MAC        : 00:50:79:66:68:19
LPORT     : 10172
RHOST:PORT : 127.0.0.1:10173
MTU        : 1500
ReceptionPC>
ReceptionPC>
```

The screenshot shows a terminal window titled "ReceptionPC" with a dark background and light-colored text. The command "show ip" has been executed, displaying network configuration details. The output includes the device name, IP address and mask, gateway, DNS settings, MAC address, LPORT, RHOST:PORT, and MTU. The terminal window has a standard Windows-style title bar with minimize, maximize, and close buttons. At the bottom of the window, there is a footer with the SolarWinds logo, the text "Solar-PuTTY free tool", and a copyright notice: "© 2019-2024 SolarWinds Worldwide, LLC. All rights reserved."

Cámaras de Seguridad

```
Camera Camera2 Camera3
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.82 255.255.255.248 gateway 192.168.50.81

Camera> show ip

NAME      : Camera[1]
IP/MASK    : 192.168.50.82/29
GATEWAY    : 192.168.50.81
DNS        :
MAC        : 00:50:79:66:68:02
LPORT     : 10180
RHOST:PORT : 127.0.0.1:10181
MTU        : 1500

Camera> 
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
Camera Camera2 Camera3
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.51.10 255.255.255.248 gateway 192.168.51.9

Camera2> show ip

NAME      : Camera2[1]
IP/MASK    : 192.168.51.10/29
GATEWAY    : 192.168.51.9
DNS        :
MAC        : 00:50:79:66:68:0a
LPORT     : 10214
RHOST:PORT : 127.0.0.1:10215
MTU        : 1500

Camera2> 
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

```
Camera Camera2 Camera3
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.51.18 255.255.255.248 gateway 192.168.51.17

Camera3> show ip

NAME      : Camera3[1]
IP/MASK    : 192.168.51.18/29
GATEWAY    : 192.168.51.17
DNS        :
MAC        : 00:50:79:66:68:20
LPORT     : 10216
RHOST:PORT : 127.0.0.1:10217
MTU        : 1500

Camera3> 
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Sala de Reuniones


```
PCMeetingRoom x PCAccounting +
Welcome to Virtual PC Simulator, version 0.6.2
Dedicated to Daling.
Build time: Apr 10 2019 02:42:20
Copyright (c) 2007-2014, Paul Meng (mirnshi@gmail.com)
All rights reserved.

VPCS is free software, distributed under the terms of the "BSD" licence.
Source code and license can be found at vpcs.sf.net.
For more information, please visit wiki.freecode.com.cn.

Press '?' to get help.

Executing the startup file

Checking for duplicate address...
PC1 : 192.168.50.90 255.255.255.248 gateway 192.168.50.89

VPCS> show ip

NAME      : VPCS[1]
IP/MASK    : 192.168.50.90/29
GATEWAY    : 192.168.50.89
DNS        :
MAC        : 00:50:79:66:68:1c
LPORT     : 10210
RHOST:PORT : 127.0.0.1:10211
MTU        : 1500

VPCS>
VPCS> █
```

solarwinds | Solar-PuTTY free tool © 2019-2024 SolarWinds Worldwide, LLC. All rights reserved.

Red Invitados (WiFi)