

# How To Install our Remote Kit?

## **IMPORTANT TIPS:**

After installation, Power on from the wall switch, 'Beep' from receiver, then the light turn on automatically, But the Fan will not spin. Pressing a fan speed button will active the fan.

# STEPS:

Step 1: connect the wires correctly

A, The inputs and outputs of the receiver must not be connected backwards, otherwise, The receiver will destroy immediately

B, Before connection, Please check the wires. Usually, there are 3 wires from your fan motor with BLUE/BLACK/WHITE. Please contact seller for technical support if the colors or number of wires do not match your ceiling fan motor.

Step 2: Do you hear a short 'BEEP' from receiver when you power on your ceiling fan?

YES: The receiver is good, and can work successfully

NO: The receiver is failed, please check your wire connection.

The correct action: Power on, 'BEEP' from receiver, then the lamp light on. Fan will not spin. Pressing a fan speed button in remote will active the fan.

Step 3: Does the indicator in remote light on when you press any button?

YES: Remote working well


NO: check battery, also check the battery case, the battery contacts maybe not a good connection for some battery brands.

Step 4: Do you hear a short 'BEEP' from receiver when you press any button in remote?


YES: The signal between receiver and remoter is correct

NO: Need rematch the signal between remote and receiver. And make sure keep the antenna outside the canopy

Rematch method: Connect seller.

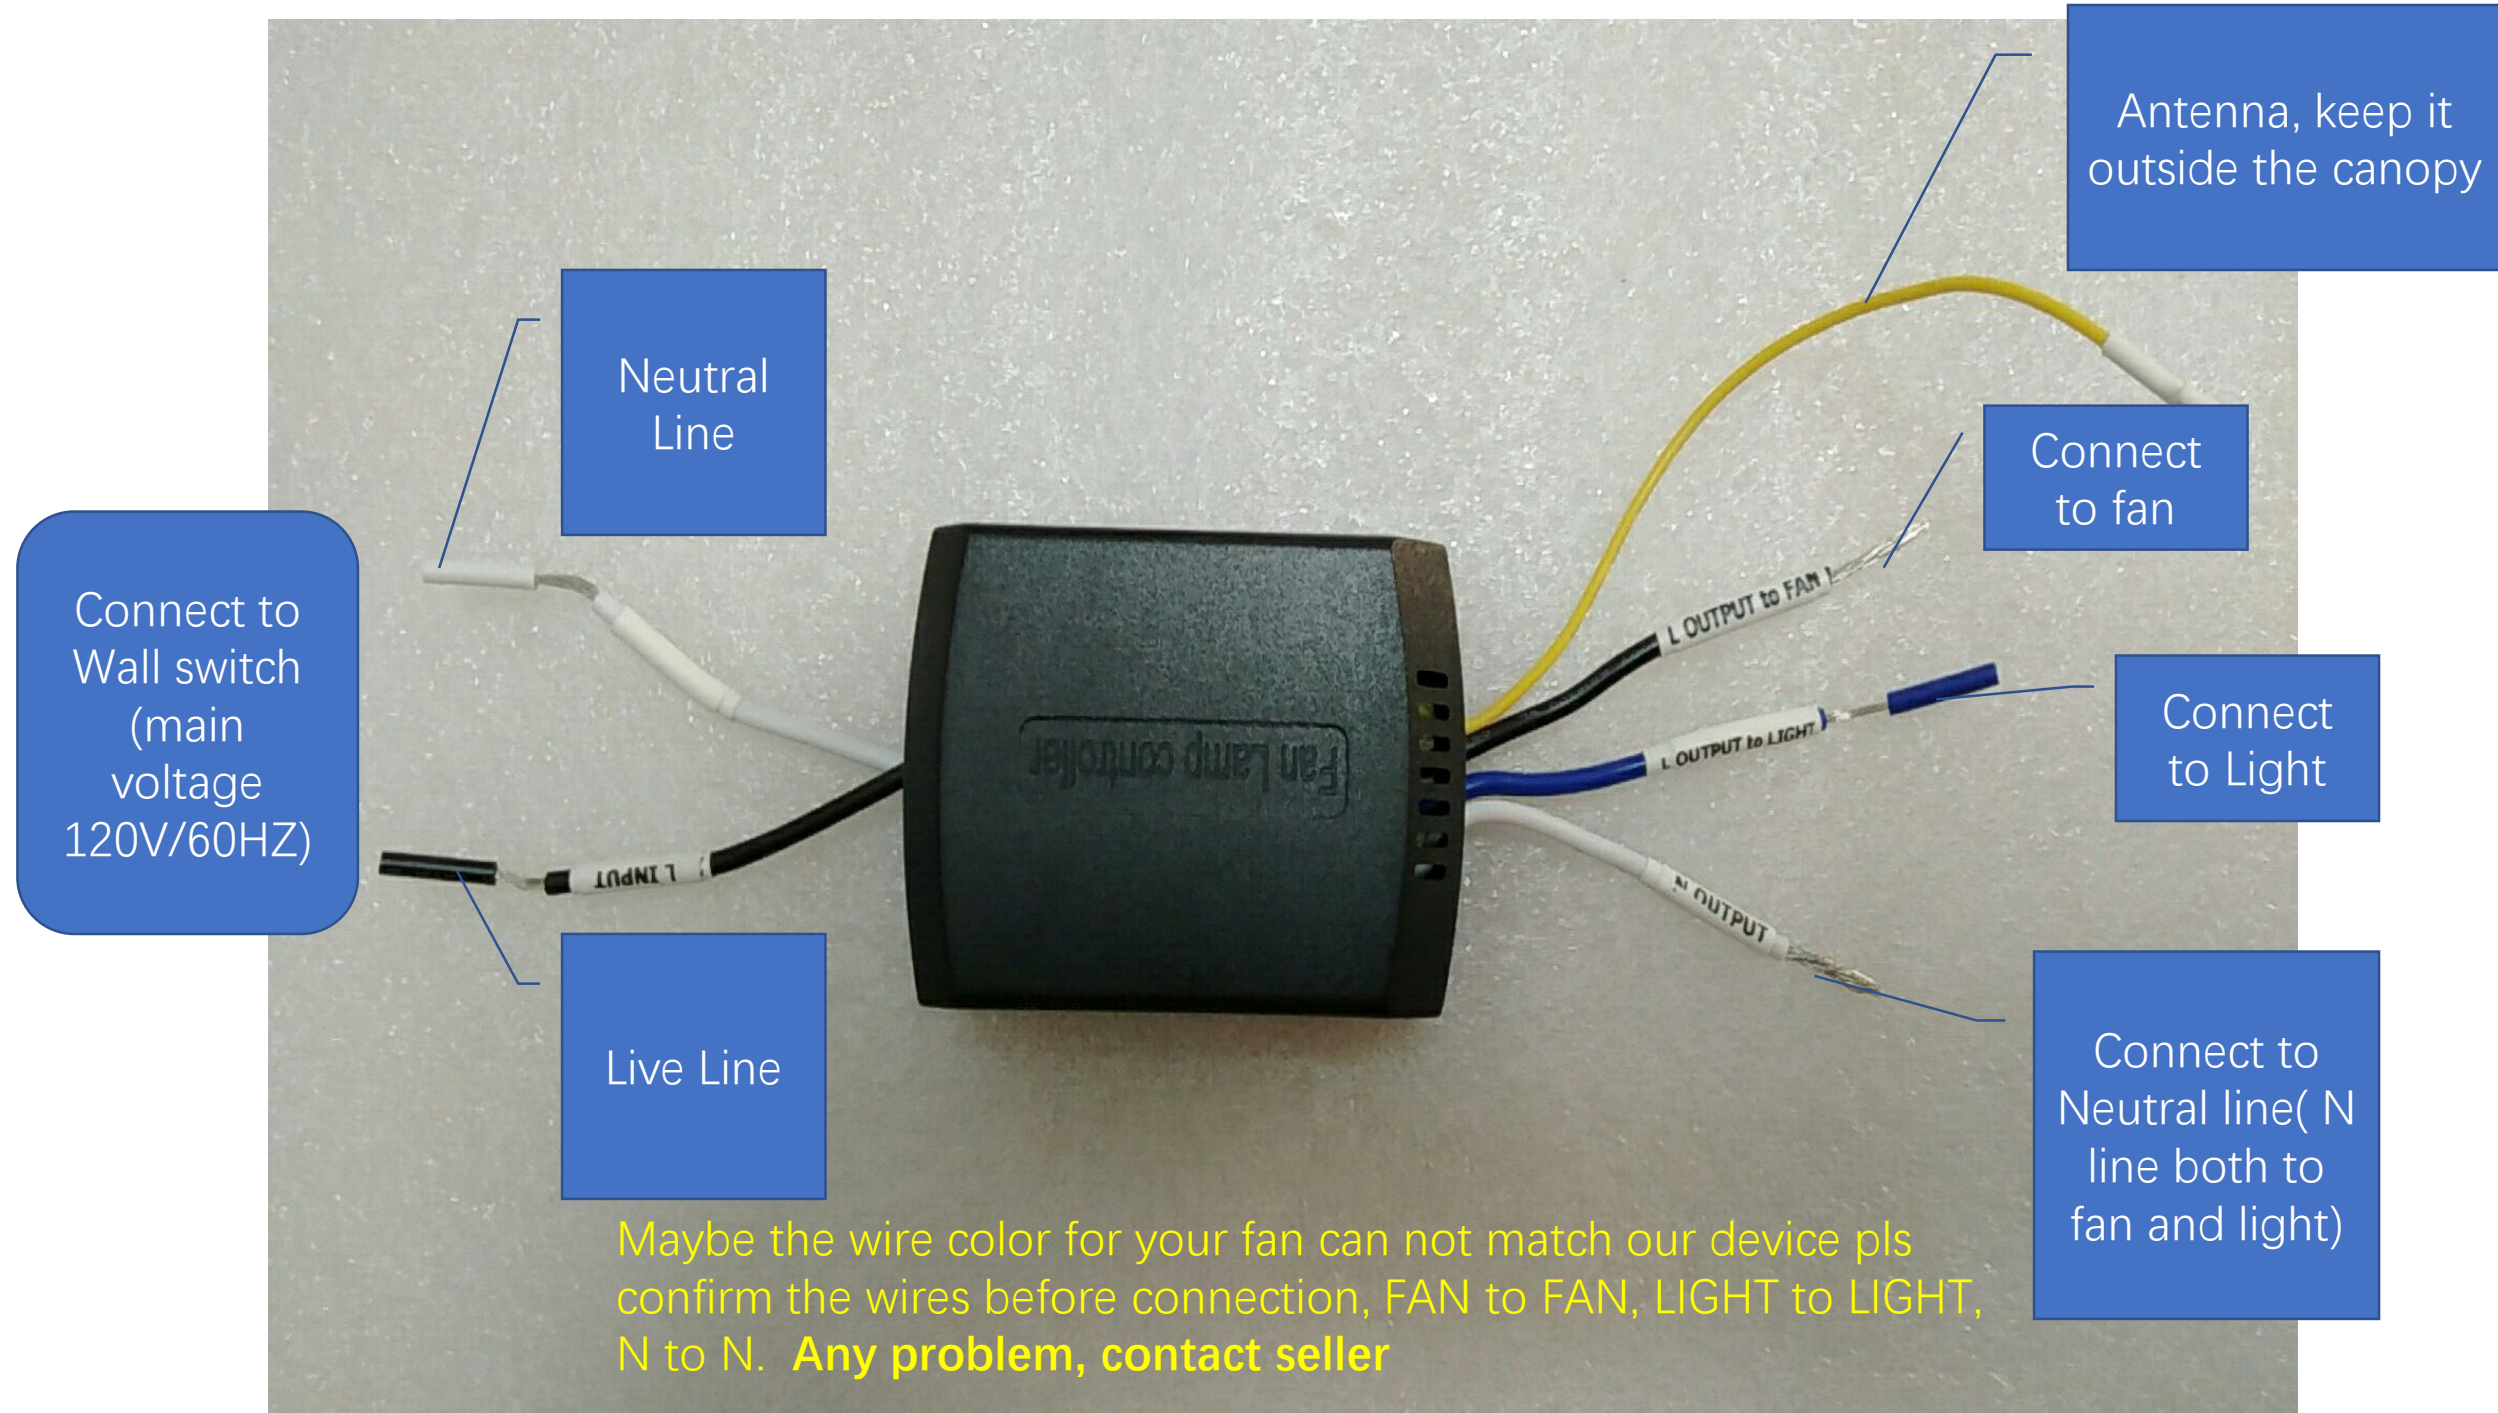



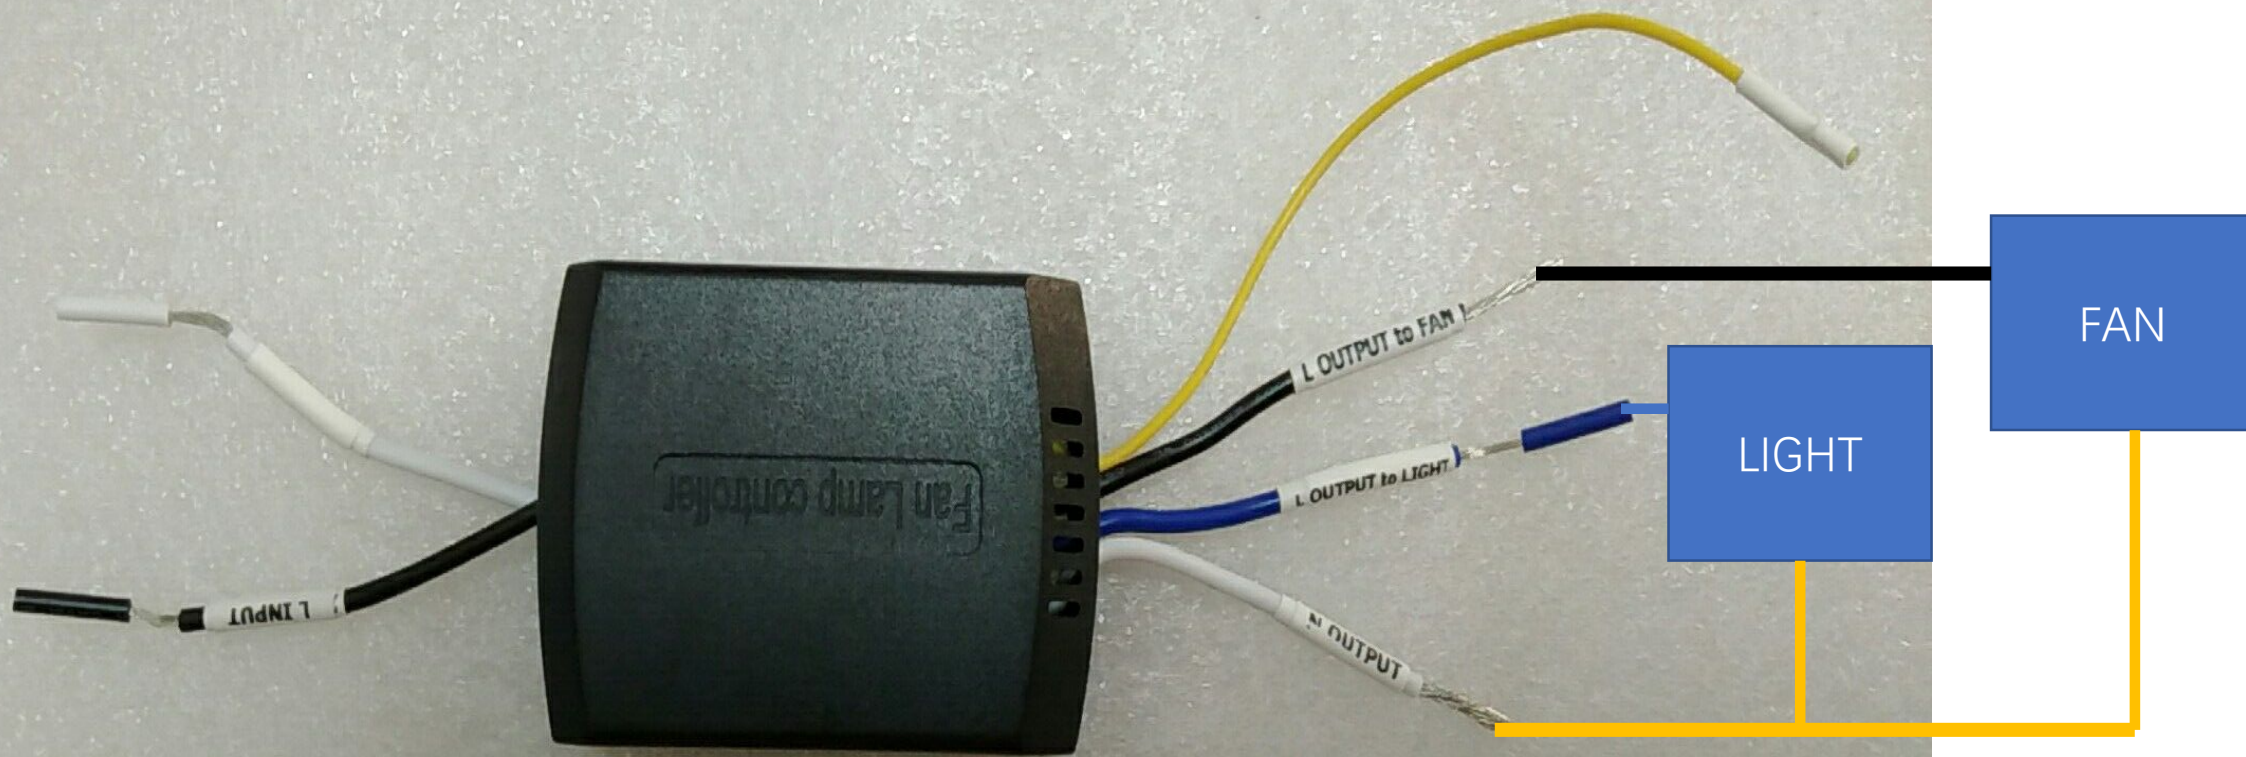


Ceiling fan brand:  
Hunter



22

Connect WHITE wire to NETURAL

Connect BLACK wire to LIVE

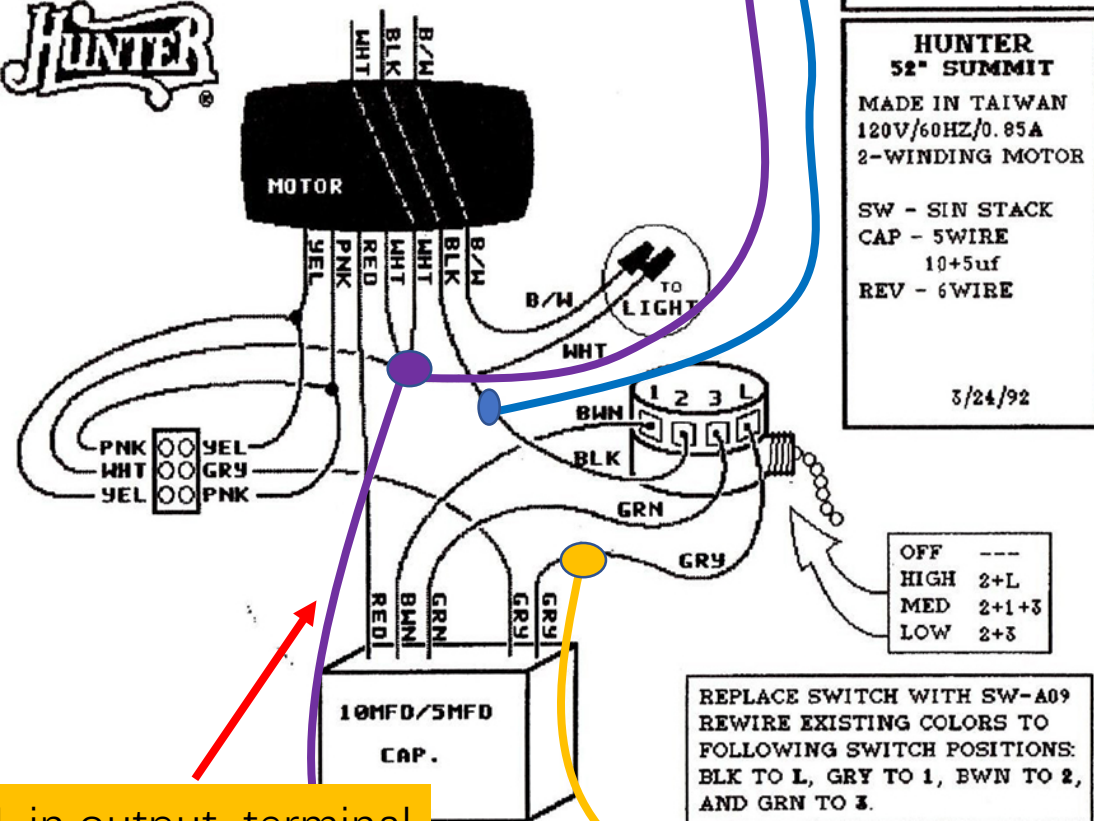

Connect WHITE wire to NETURAL in output terminal

Connect GREY wire from CAP to fan LIVE







Ceiling fan brand:  
HAMPTON BAY

