



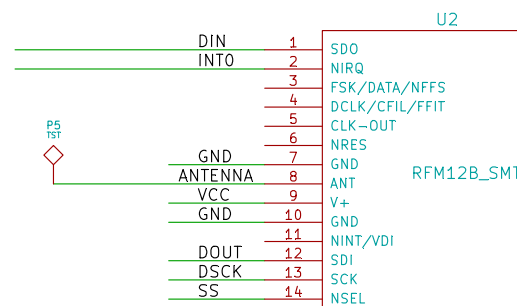


Primary use of board is as a remote temperature sensor using a RFM12 transceiver and a DS18B20 1-wire sensor



1-WIRE PORT

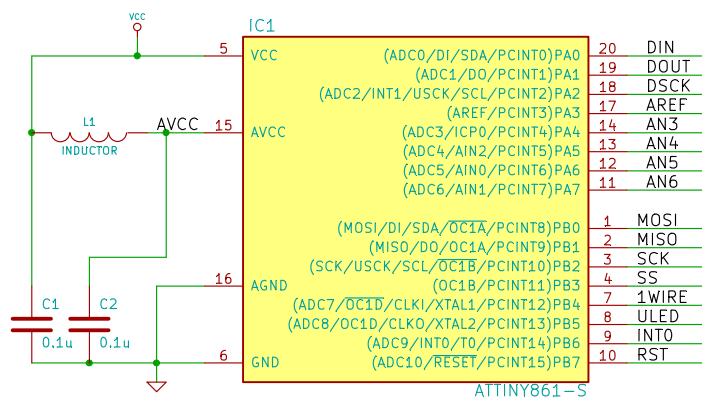

ATMEL 6-pin ICP header



PCB mounting holes

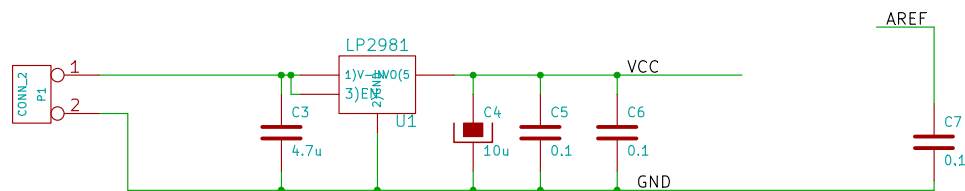

Open Hardware		
StewieTee		
File:		
Sheet: /		
Title: ATTiny461/861 RFM12 node		
Size: A4	Date: 19 jun 2013	Rev: 3
KiCad E.D.A. eeschema (2013-04-19 BZR 4011)-stable		Id: 1/1