1 Main technical data:

Display content:17numbers+21Prompts

Operating voltage: $5.0\pm0.2V$

Drive mode: 1/4BIAS, 1/8DUTY

View angle:12:00

Character high: 5.9mm, 14.7mm, 9.6mm


Display type:TN, Positive
Display mode:Reflective
Connection way:Metal Pin

Operating temperature:-10~+60°C

Environmental relative humidity: <85%


Storage temperature: -20~+70°C

2 LCD Outline Size:

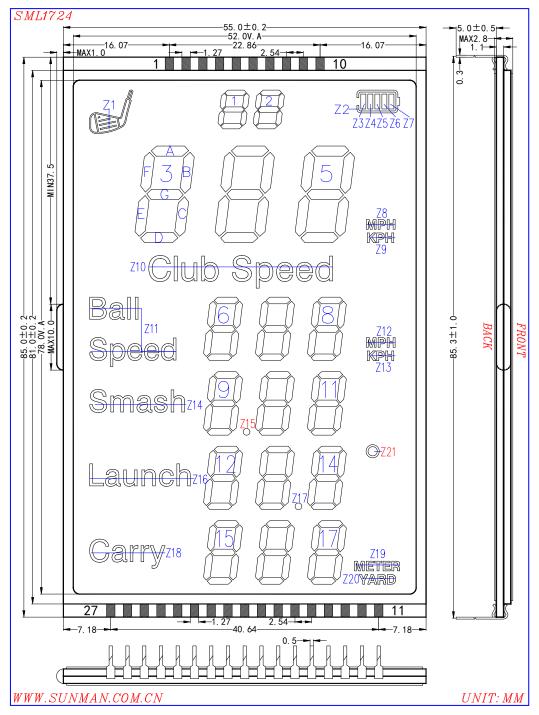



3 All display status:



4 Pin instructions:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
COM1	Z18	1A	2A	\	5A	4A	3 A	8A	7 A	6A	11A	10A	9A	14A	13A	12A	17A	16A	15A	\	\	\	\	\	\	\	COM1
COM2	Z16	1B	2B	Z2	5B	4B	3B	8B	7B	6B	11B	10B	9B	14B	13B	12B	17B	16B	15B	\	\	\	\	\	\	COM2	\
COM3	Z14	1F	2F	Z5	5F	4F	3F	8F	7F	6F	11F	10F	9F	14F	13F	12F	17F	16F	15F	\	\	\	\	\	сомз	\	
COM4	Z11	1G	2G	Z4	5G	4G	3G	8G	7G	6G	11G	10G	9G	14G	13G	12G	17G	16G	15G	\	\	\	\	COM4	\	\	\
COM5	Z10	1C	2C	Z3	5C	4C	3C	8C	7C	6C	11C	10C	90	14C	13C	12C	17C	16C	15C	\	\	\	COM5	\	\	\	\
COM6	Z1	1E	2E	Z6	5E	4E	3E	8E	7E	6E	11E	10E	9E	14E	13E	12E	17E	16E	15E	\	\	СОМ6	\	\	\	\	\
COM7	\	1D	2D	Z 7	5D	4D	3D	8D	7D	6D	11D	10D	9D	14D	13D	12D	17D	16D	15D	\	COM7	\	\	\	\	\	\
COM8	\	\	\	\	\	Z8	Z9	\	Z12	Z13	\	\	Z15	Z21	Z17	\	Z19	Z20	\	COM8	\	\	\	\	\	\	\