


Credit and Info: <https://www.jameco.com/Jameco/workshop/JamecoFavorites/radio-locator-beacon-for-flying-objects.html>  
**Radio Beacon Transmitter**

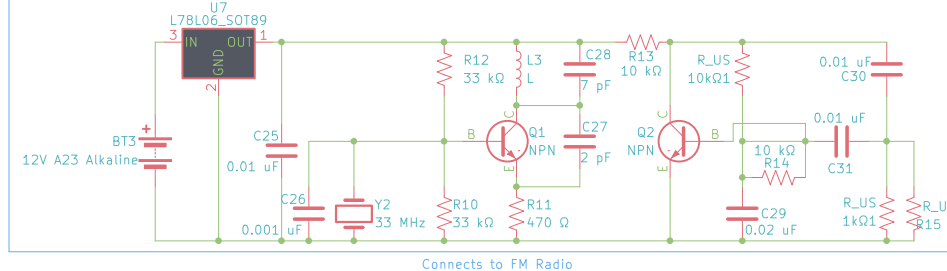

Optional resistor R8 to the twin-T audio oscillator schematic to represent a resistive sensor measuring light, humidity, temperature or some other condition of the rocket in flight. Changes in the resistance of this sensor will change the audio tone and provide data on what's happening on-board. For example, a cadmium-sulfide photoresistor pointing out the side of the rocket will give alternating high and low tones as the rocket spins during flight, providing an indication of its roll rate.





Sheet: /Positioning Subsystem/  
 File: Positioning\_BLSI\_BlackBoard.kicad\_sch

**Title:**

Size: A4  
 KiCad E.D.A. 8.0.0

Date:

**Rev:**  
 Id: 6/5

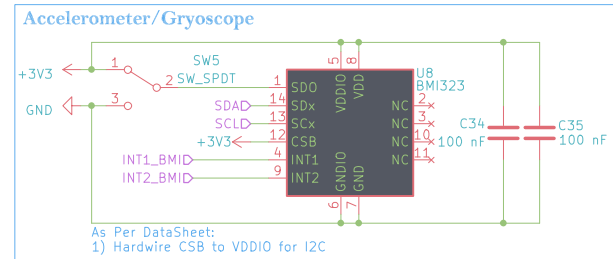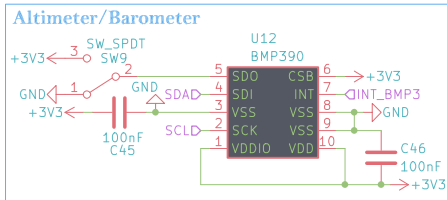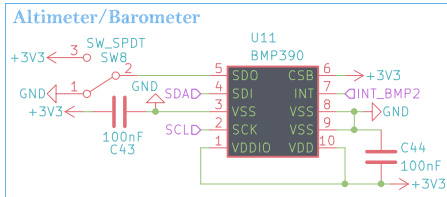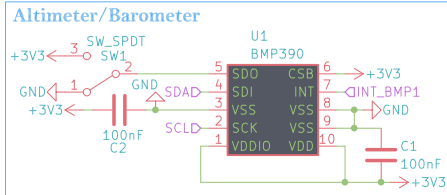

Sheet: /Sensor Subsystem/  
File: Sensor\_BLSI\_BlackBoard.kicad\_sch

**Title:**






Size: A4  
KiCad E.D.A. 8.0.0

Date:

**Rev:**

Id: 11/5

Sheet: /Power Subsystem/ File: Power_BLSI_BlackBoard.kicad_sch		
<b>Title:</b>		
Size: A4	Date:	<b>Rev:</b>
KiCad E.D.A. 8.0.0		Id: 13/5

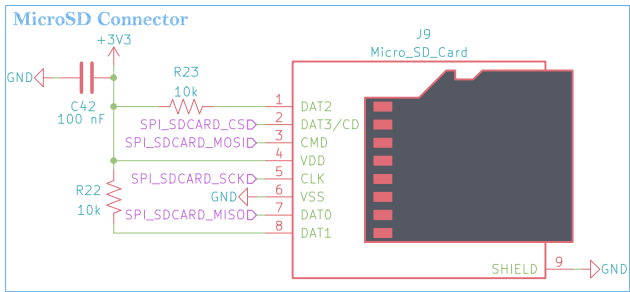

Sheet: /User Interface Subsystem/  
File: UserInterface\_BLSI\_BlackBoard.kicad\_sch

**Title:**

Size: A4  
KiCad E.D.A. 8.0.0

Date:

**Rev:**

Id: 14/5