

TOP SECRET

Parametric Modeling of 3D Printed Rockets in Fusion 360

Create designs that can be easily scaled from shoulder fired to mobile launched rockets.

Written by Mr. Barbetta




TOP SECRET

Contents

Using this Document	3
Introduction to Parametric Modelling	4
Starting a Design in Fusion 360	5
Creating the Fin Tube (Sketch and Extrude)	6
Saving Your Fusion 360 Project	8
Creating a Circular Pattern	15
Using the Chamfer Tool	18
Using the Fillet Tool	19
Using the Trim Tool	26
Adding Text to a Flat Surface	31
Setting Materials and Colors	36
Creating a Test Print	39
Using a Construction Plane	40
Using the Split Body tube	41
Exporting a STL file for printing	42
Using the Slicing Program Cura	43
Creating a New Component for the Nose Cone	46
Creating a Construction Axis	47
Creating a Construction Plane	47
Using the Revolve Tool	53
Adding Text to a Curved Surface	66
Using a Joint	71
Create a New Component for the Body Tube	73

Using this Document


The best way to follow this document is to **reduce the width of the Fusion 360 window** and have this pdf document open in Chrome browser as shown below. This document can be **downloaded from Schoology and then dragged into Chrome and scaled down to 80%**.

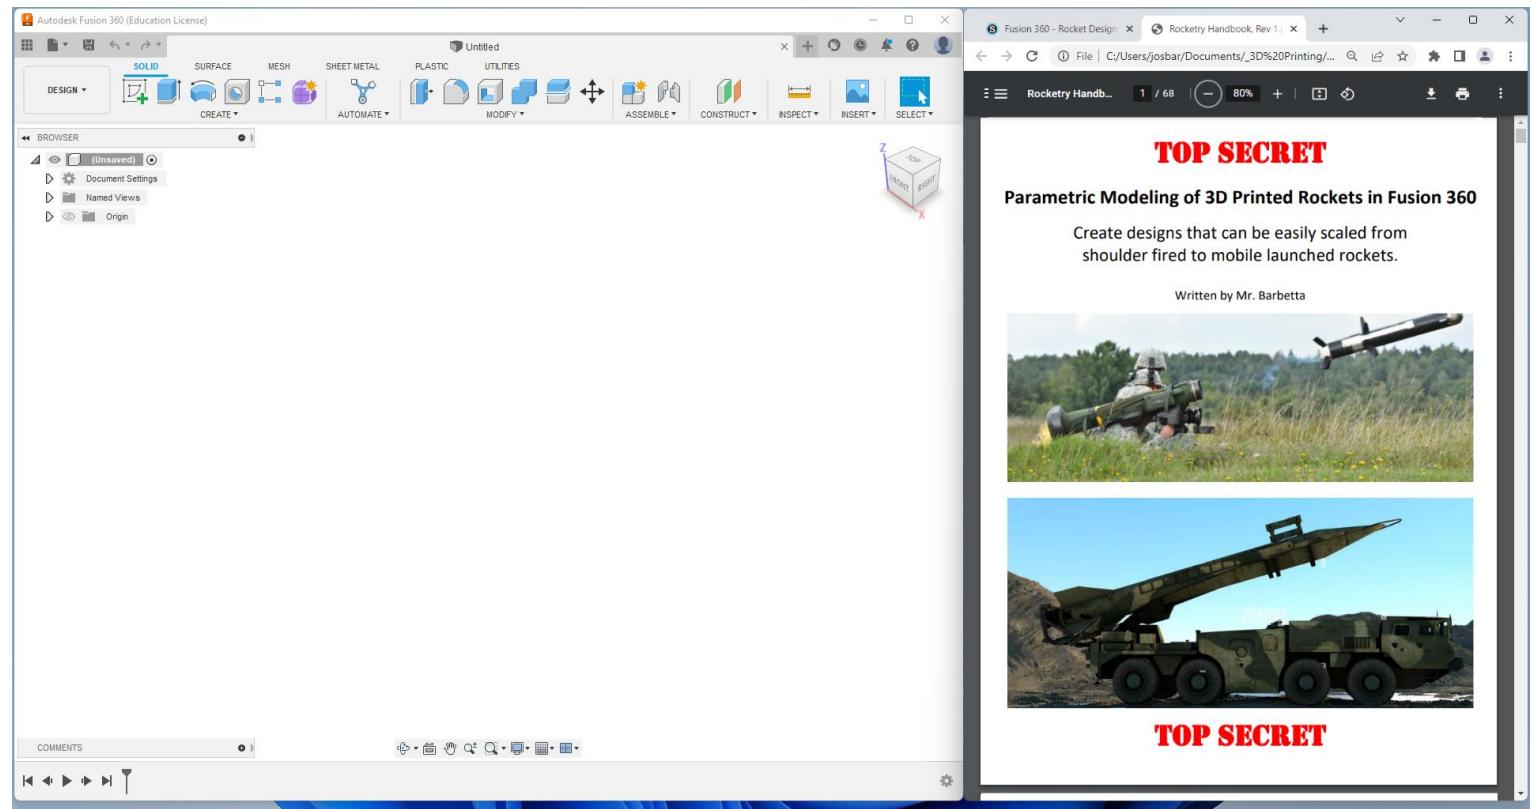

Introduction to Parametric Modelling

It is common with CAD (Computer Aided Design) work to set dimensions directly as one is creating the various features of a design. If a dimension needs to be later changed then one can find the feature and edit its dimension.

Parametric modelling is a feature of many CAD programs, wherein dimensions are stored in a "database" of parameters. One advantage allows a parameter to be correlated with multiple features. For example, if a design has many holes of the same size, it helps to use a parameter for the hole diameter. If the size of the holes needs to be changed, a single parameter can be updated, which will change all the holes at once. This is much more convenient compared to having to change the dimension for each hole individually. The advantages of using parameters also extend to feature dimensions that are based on others.

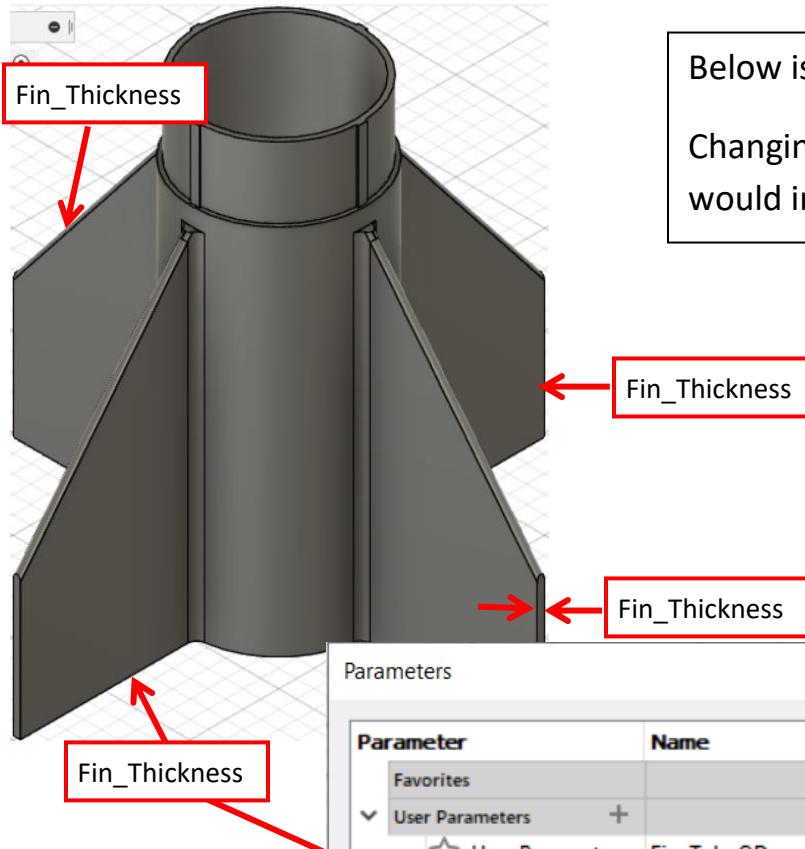


Below is an example parameter list for a fin set. Changing Fin_Thickness from 0.040in to 0.060in would increase the thickness of each fin.

Note that a parameter can be a value or a function of other parameters.

Parameter	Name	Unit	Expression	Value
User Parameters				
User Parameter	Fin_TubeOD	in	0.977 in	0.977
User Parameter	Fin_TubelD	in	0.870 in	0.87
User Parameter	Fin_TubeThickness	in	(Fin_TubeOD - Fin_TubelD) / 2	0.054
User Parameter	Fin_TubeLength	in	2.100 in	2.10
User Parameter	Fin_Thickness	in	0.040 in	0.04
User Parameter	Fin_Height	in	1.000 in	1.00
User Parameter	Fin_Count		4	4
User Parameter	Fin_RootChord	in	2.000 in	2.00
User Parameter	Fin_SweepLength	in	1.200 in	1.20
User Parameter	Fin_FilletRadius	in	0.050 in	0.05
User Parameter	Fin_CouplingOD	in	0.930 in	0.93
User Parameter	Fin_CouplingLength	in	0.400 in	0.40
User Parameter	Fin_CouplingRibOD	in	0.950 in	0.95
Model Parameters				
FinAssembly (ver 2.0.1...)				

Starting a Design in Fusion 360

- open Fusion 360
- from top **File** icon select **Save** and name file
 - as you work you may want to occasionally save your work in case Fusion 360 crashes or an asteroid hits Earth
- in the left "BROWSER" click on the **arrow next to Document Settings**
- click on the **edit icon** that appears to the left when you hover over Units
- change **Unit Type** to **Inch**

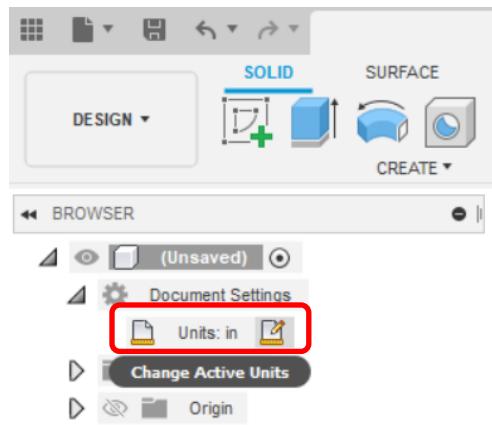

- from top **CREATE > New Component** Name: <your first name and last name initial> FinSet e.g. **JoeB_FinSet**

First, we will set some parameters that can be used to set dimensions to easily change dimensions after the design is completed. We can thus use this model for shoulder-fired rockets up to long range missiles.

- from the top **MODIFY** menu select **Change Parameters** near the bottom of the list
- next to **User Parameters** click on + and enter the **Name** and **Expression** for each item in the below list. Note that you will need to click + for each item. **Don't forget to click OK when done!**

Name	Expression	OD is a common abbreviation for Outer Diameter or Outer Dimension .
Fin_TubeOD	0.977	0.977 is the OD for a common model rocket body tube BT-50
Fin_TubeThickness	0.050	
Fin_TubeLength	2.100	Note that values are specified with 3 digits after the decimal point, i.e. 0.050, 2.100. This use of significant digits conveys the tolerance of the dimensions. A common manufacturing tolerance could be +/- 0.005".

Note the underscores in the names.

After entries you can always reopen the **Parameters** window to **add more parameters or edit any** by clicking on a name or expression. For parameters that may be frequently used, its star can be clicked to have it also appear in Favorites. For future reference the below link covers the use of parameters:

<https://productdesignonline.com/user-parameters-in-autodesk-fusion-360/>

**Many complicated steps will follow. Being a rocket scientist is not easy.
If you find this too complicated, you may want to consider an easier career,
such as that of a brain surgeon.**

Creating the Fin Tube (Sketch and Extrude)

- CREATE > Create Sketch


- hover over bottom orange parallelogram in center to cause the bottom plane to show
- left-click on the bottom parallelogram
- the plane should turn and the top right view cube at the upper right should show "Top"

- select the Circle tool over CREATE

- place the center point where the axes cross and left-click

At this point the circle size will change with mouse moves and the dimension box will show with a blue value. Type the first letter of the parameter you want to use, **f**, and a list of parameters starting with that letter will appear.

- select the **Fin_TubeOD** parameter in the list and then press **Enter**. OD stands for *Outer Diameter*.

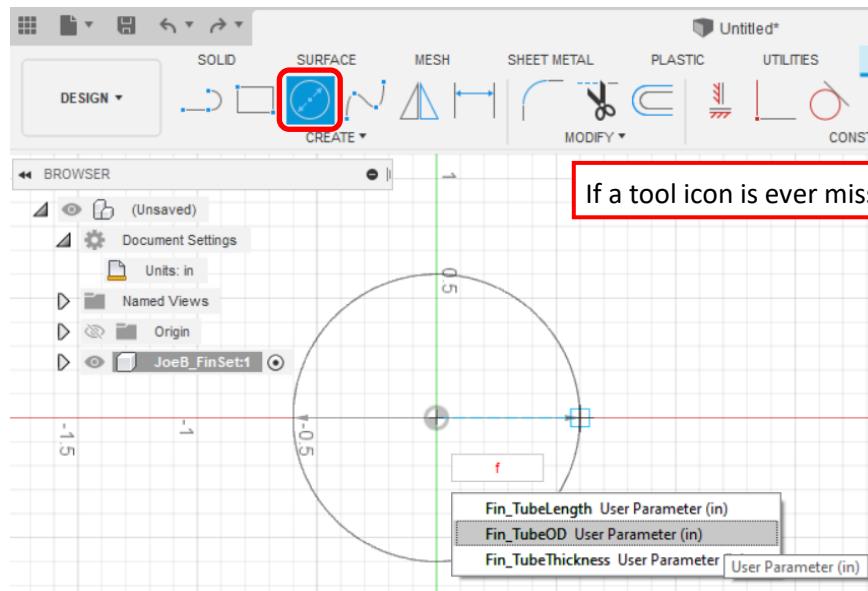


If a tool icon is ever missing open the **CREATE** or **MODIFY** menu to find it.

Note that your screen may look different. Here, zooming in with the mouse scroll wheel was used. There is also a hand icon at the bottom of the Fusion 360 window used for panning.


- select the **Offset** tool over **MODIFY** parameter, type **f** and select **Fin_TubeThickness**.

- you may have to click the **Flip** icon to move the red circle inside the blue circle.

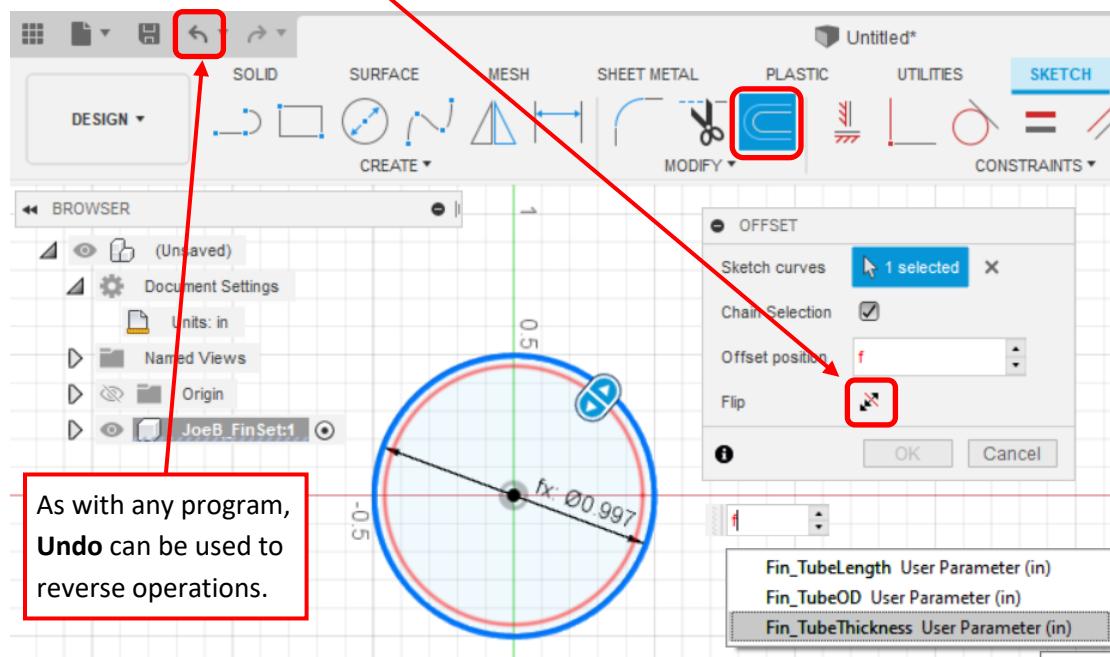


As with any program,
Undo can be used to
reverse operations.

- click **Finish Sketch**.

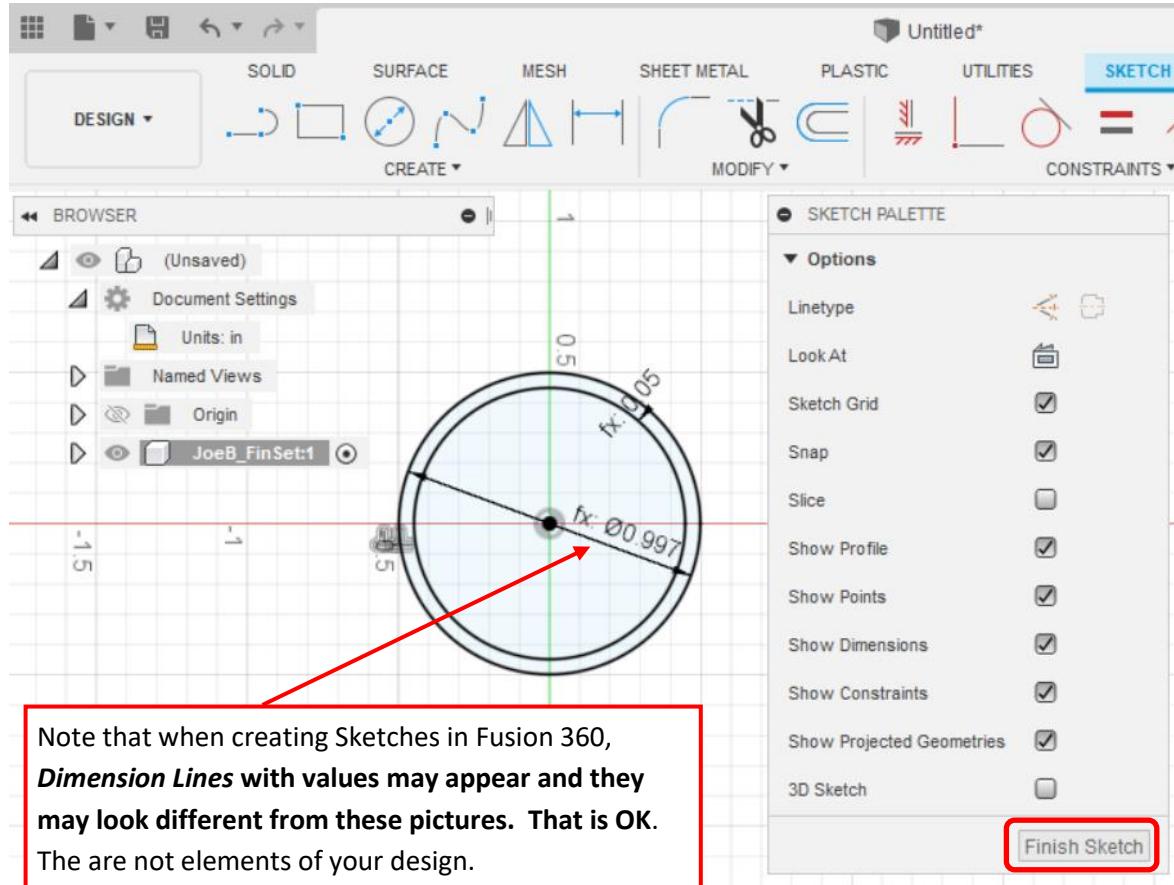

- select the top **Extrude** icon
- type **f** to get the parameter list and select **Fin_TubeLength**
- click **OK**

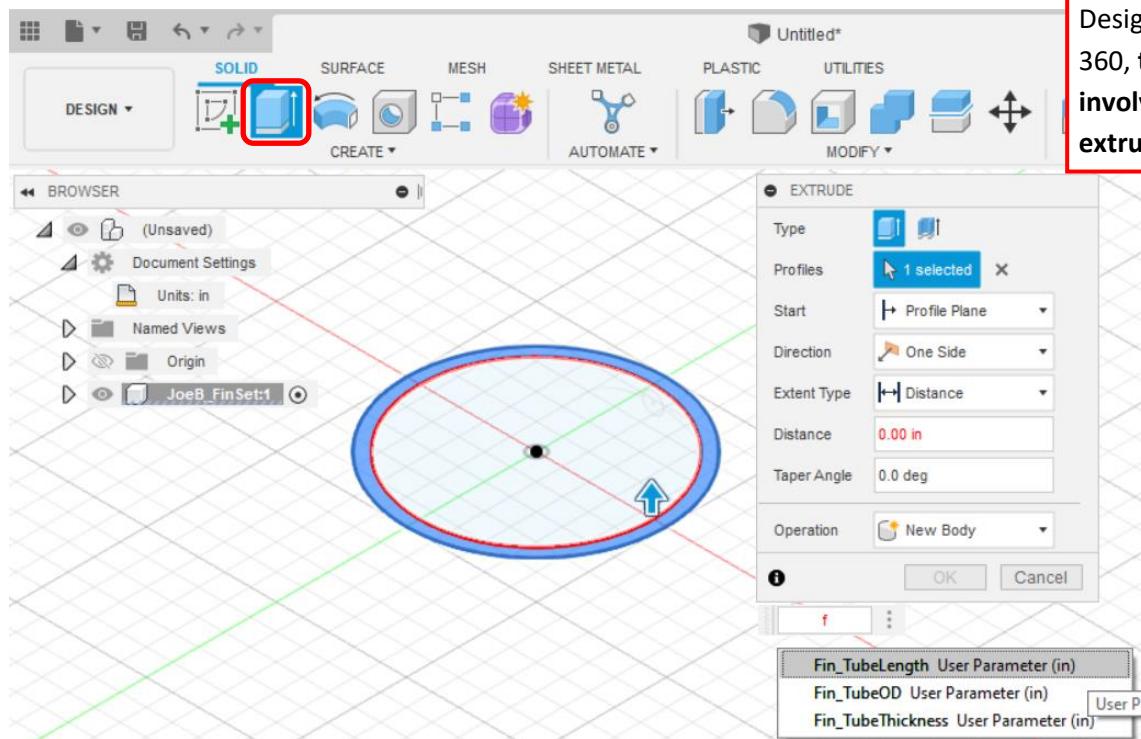


Saving Your Fusion 360 Project

At this point your tube may look like that below.


- click on the top **File** icon and select **Save** and create a name for your design, which should show in the top tab.

From time to time save your work in case Fusion 360 crashes. Yes. This happens.


By default Fusion 360 saves your work “in the cloud” to be opened next time you log into Fusion 360 from any computer. However, if you are afraid that adversaries may hack the AutoDesk servers and spy on your rocket program, you can save files to your computer instead. One can also select **Export** instead of **Save** if you want to save a .f3d Fusion 360 file to a location on your computer.

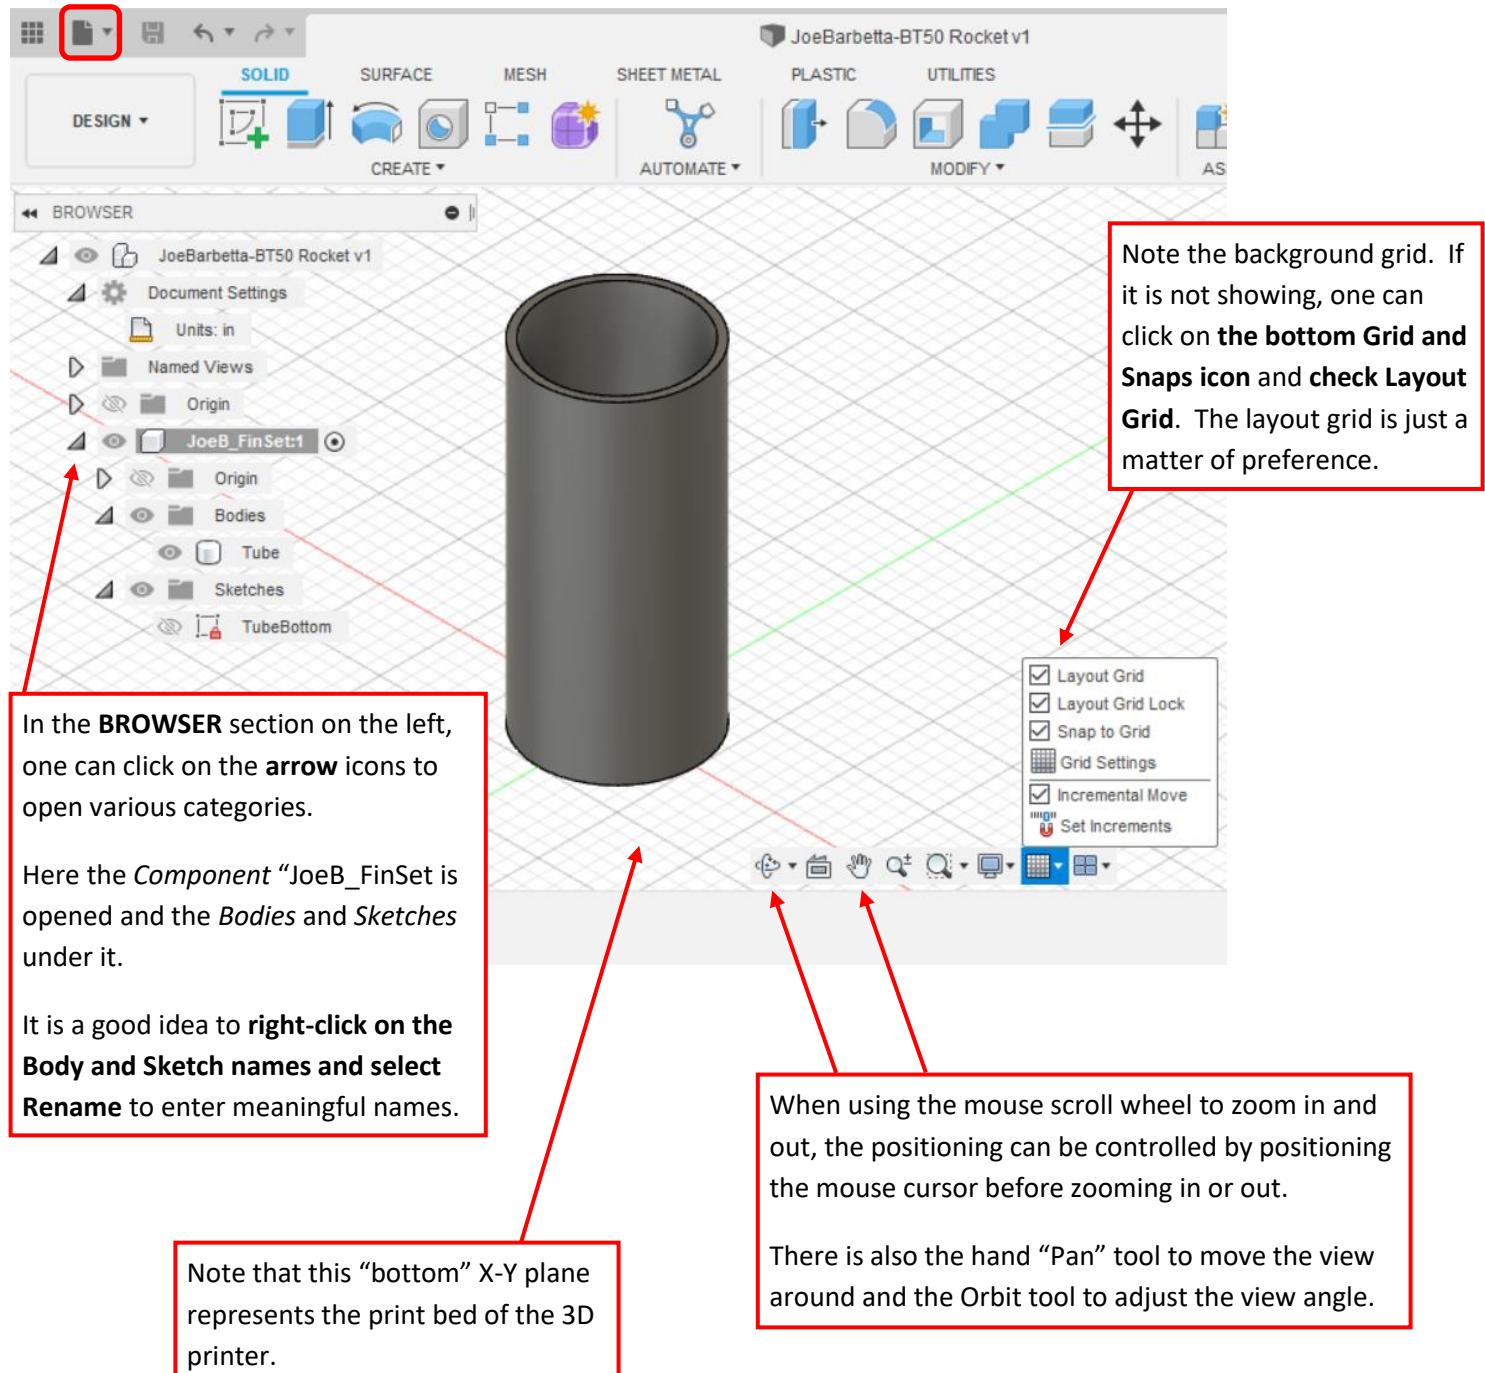

- rotate the **top right view cube** or the **Orbit tool** to position the tube to view its bottom.
- ensure your **FinSet** component is still selected. If not right-click on the **Component name** and select **Activate..**

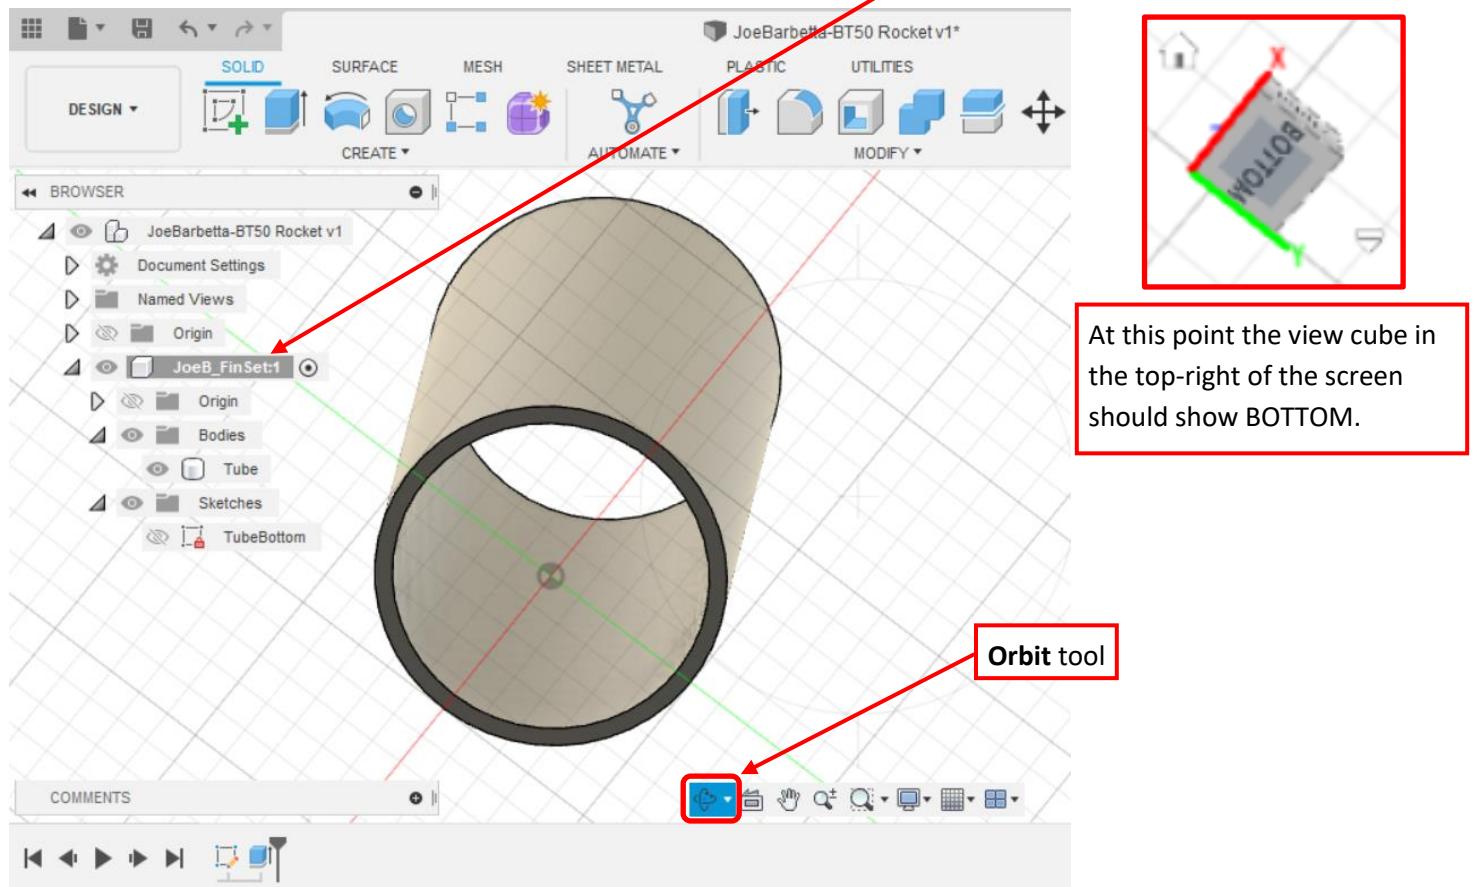

- click on the top **Sketch** icon and click on the **bottom** of the tube and **Not** on the orange square.

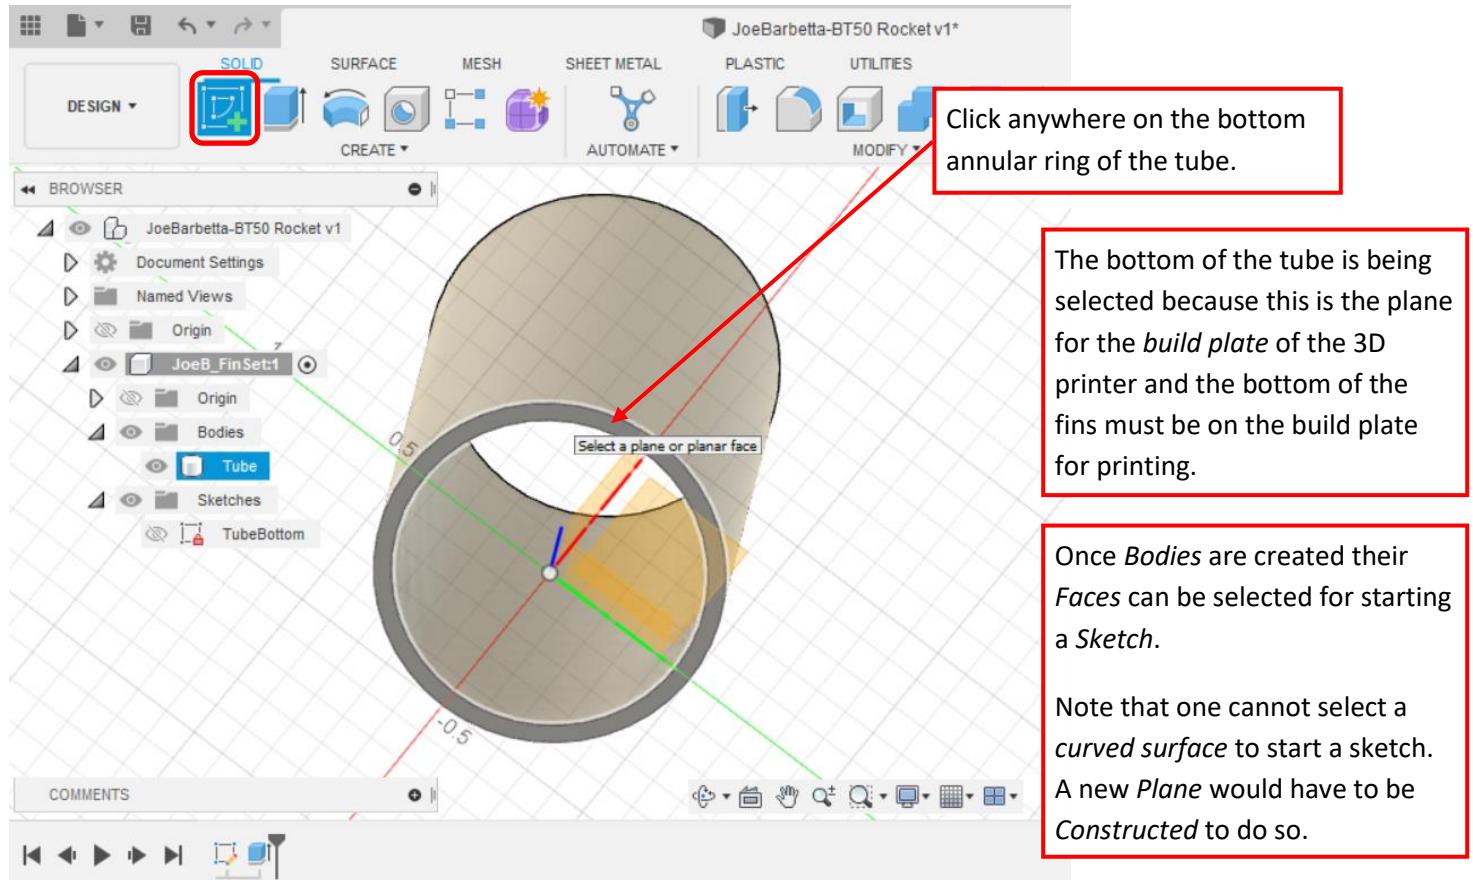


As done previously, open the **Parameters window** and add additional parameters.

- from the top **MODIFY** menu select **Change Parameters** near the bottom of the list
- next to **User Parameters** click on + and enter the **Name** and **Expression** for each item in the below list. Note that you will need to click + for each item. You may be able to copy and paste Expressions, but **if it shows as red you may have to type the expression.**
- **Don't forget to click OK when done!**


Name	Expression	
Fin_Number	4 (Change units to No Units for this one)	
Fin_RootChord	2.000	
Fin_TipChord	1.100	
Fin_Height	1.000	
Fin_Thickness	0.040	
Fin_FilletRadius	0.050	
Fin_RootPosition	Fin_TubeOD / 2 - 0.01	
Fin_ThicknessDiv2	Fin_Thickness / 2	
Fin_SweepLength	Fin_RootChord - Fin_TipChord	
Fin_TopChamfer	Fin_Height - 0.01	

Some names are shown in blue to indicate that they match the Trapezoidal fin set parameters used in the OpenRocket simulator software.

The Parameters window should appear as below.

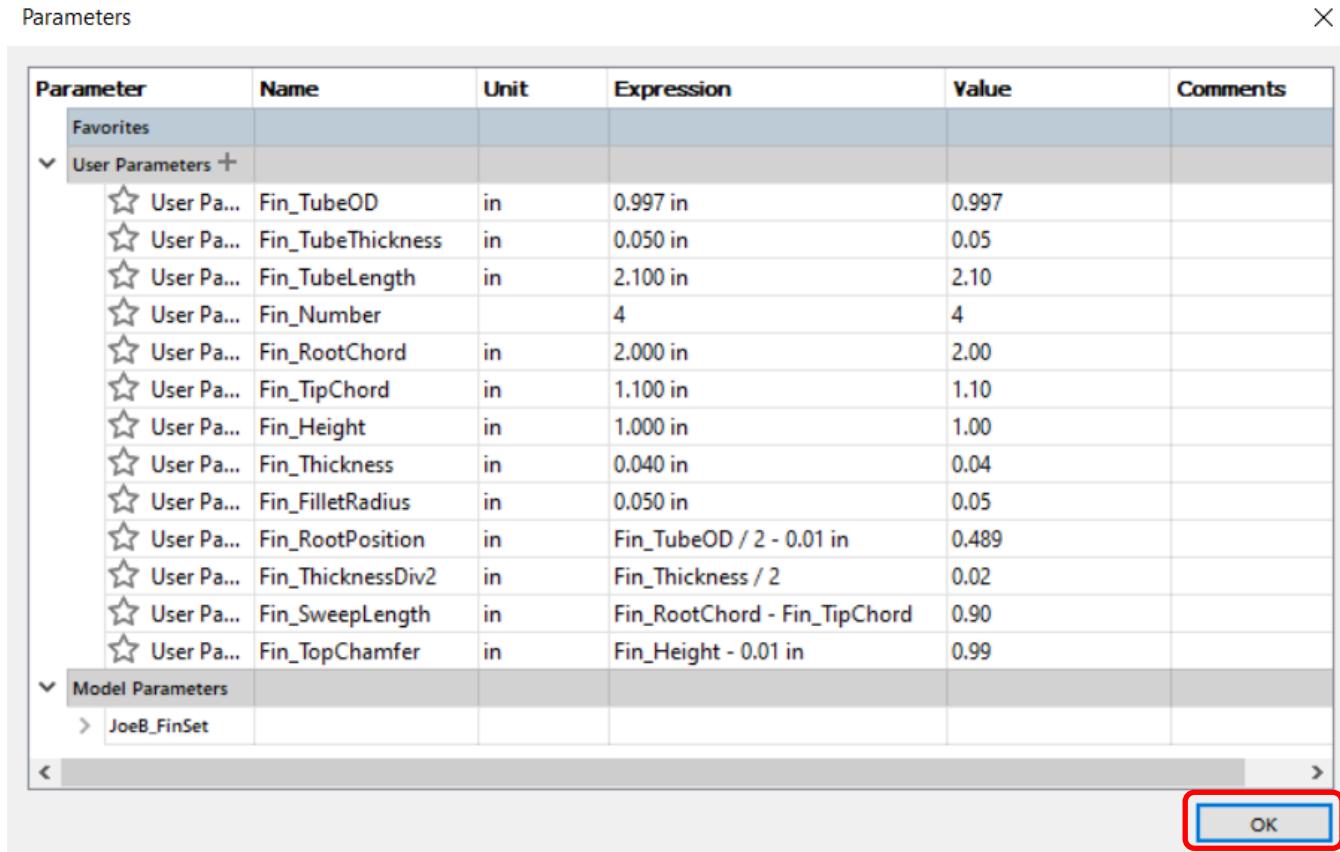


- click on the **Line** icon and on the Sketch Palette window click on the **1st icon next to Linetype** for a *Construction line*.
- draw the line **from the center of the circle** upward and close to the circle's edge
- type **f** and select **Fin_RootPosition**

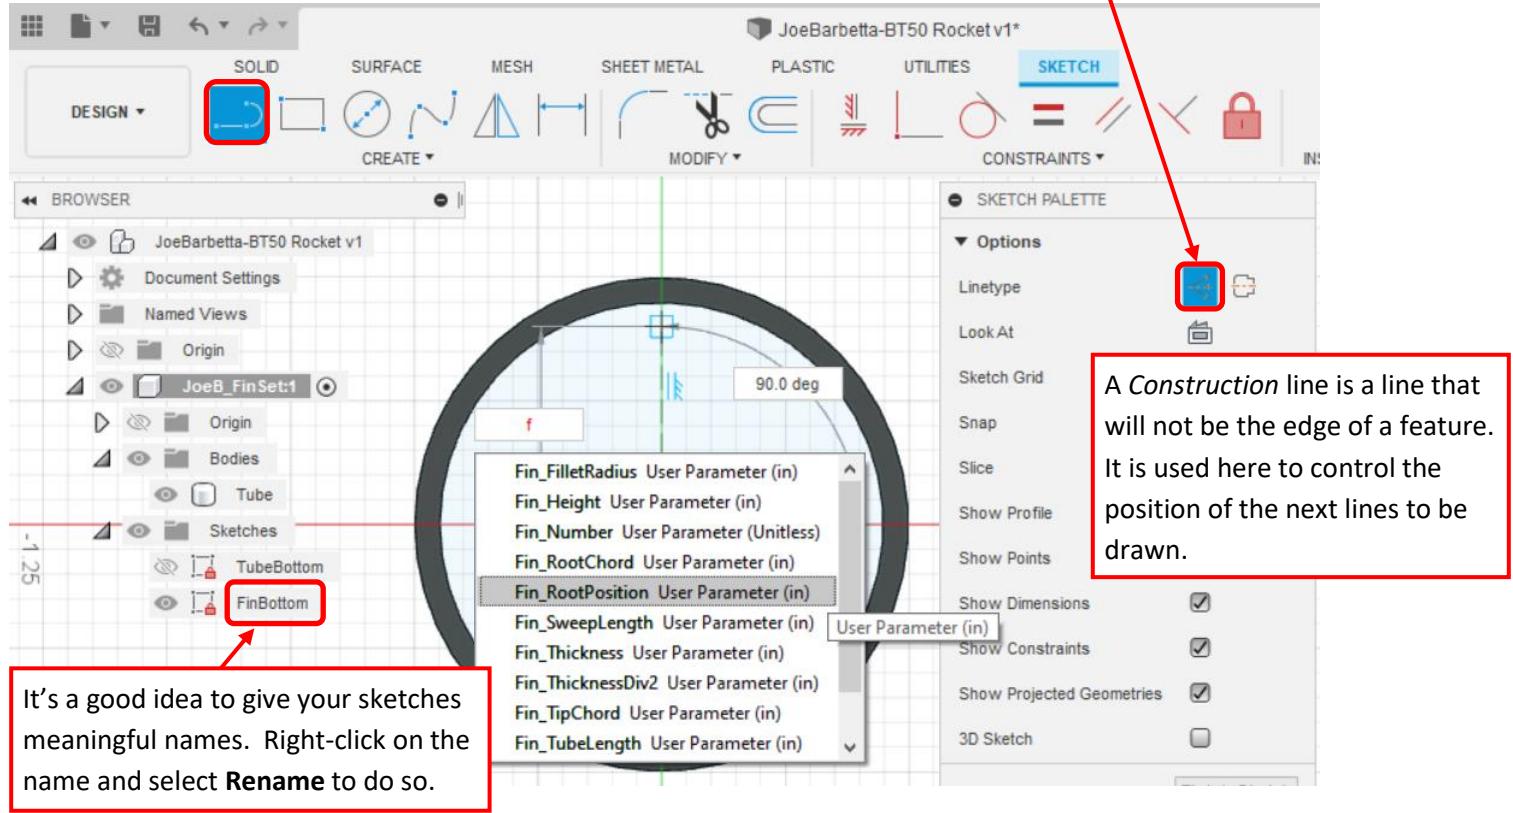

This is what that line should look like. The dash pattern of the line indicates it is a Construction line. It is OK if the thin black dimension lines look different.


Do Not click Finish Sketch after each line. You will only do so after the entire Sketch is done.

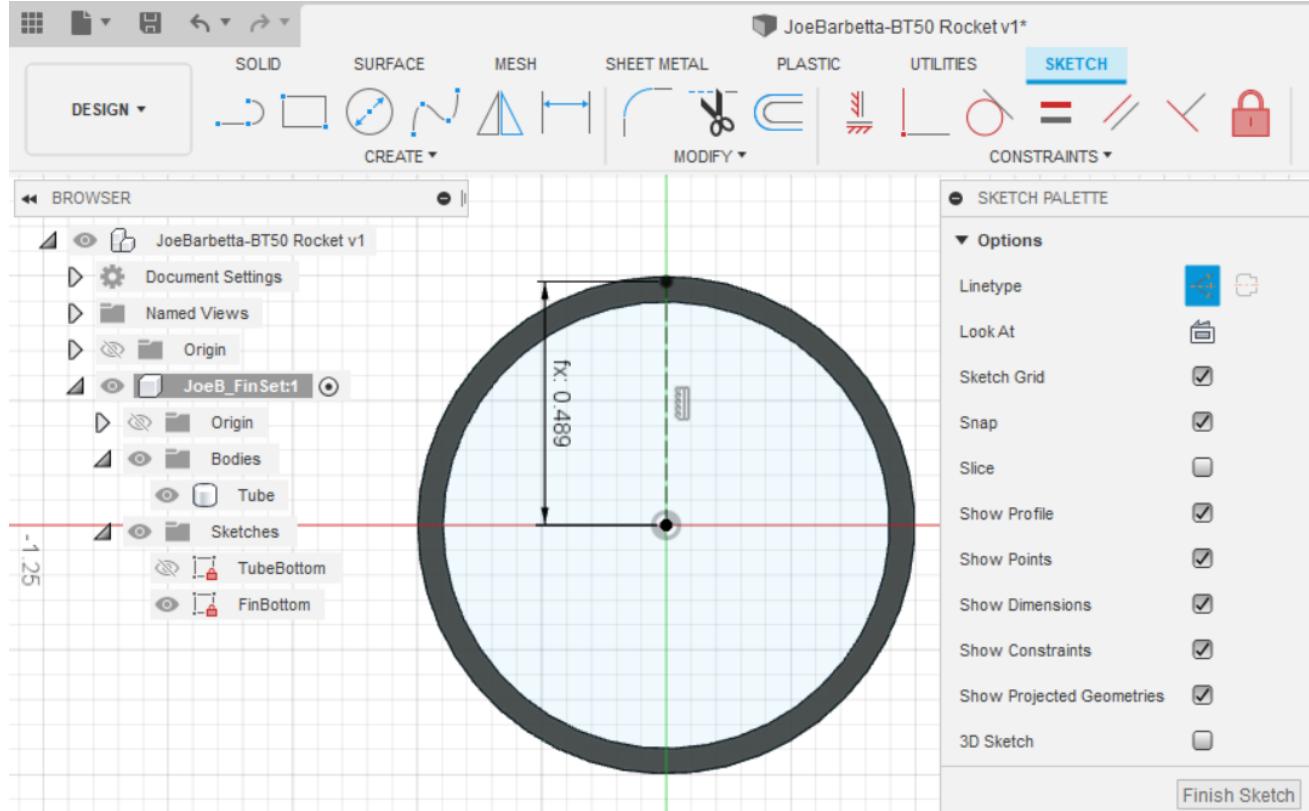

The steps after the below picture may be a difficult, but **try not to say bad words**.

As shown below, the end result will be a **vertical rectangle extending up from the tube**. This will be the bottom of a fin.


As mentioned, **don't worry if the thin dimension lines look different**. It is the center rectangle that we care about.

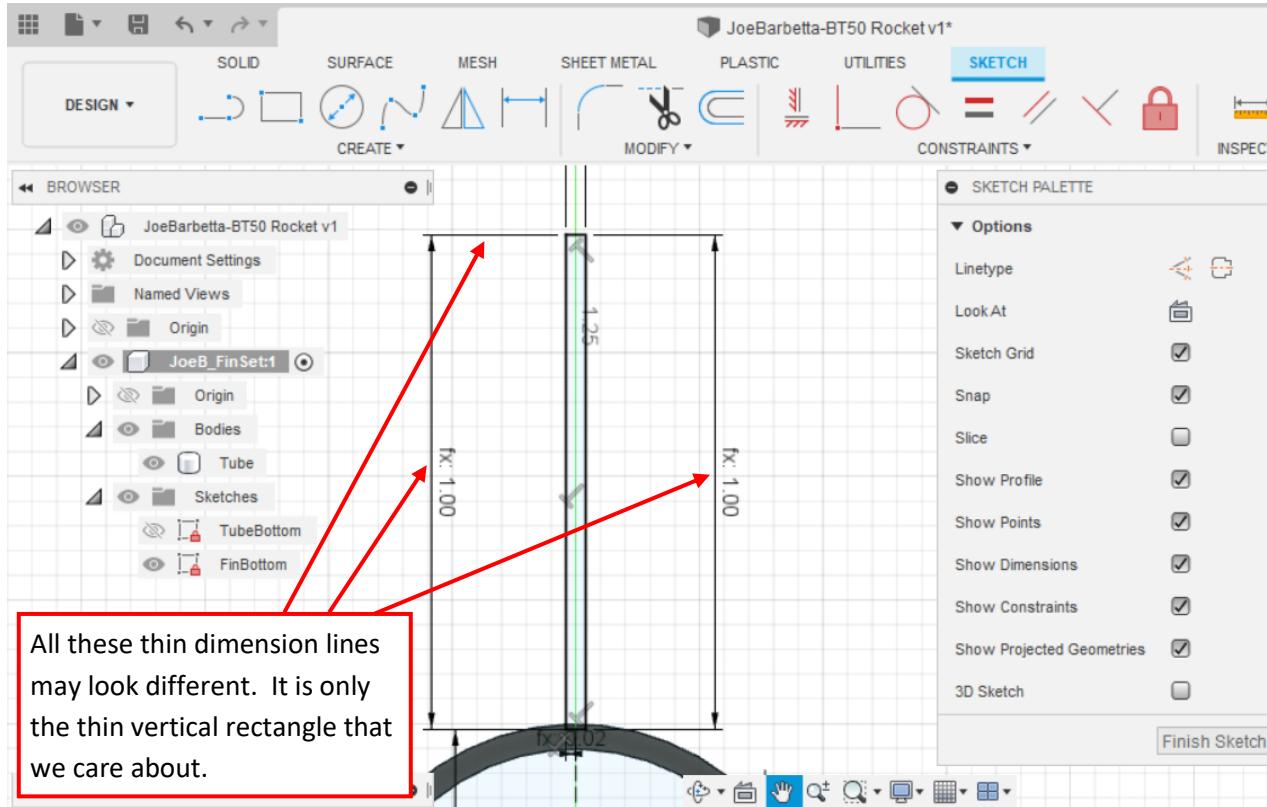


- using the **mouse wheel**, zoom into the top of the circle. You can use the **bottom hand icon** to reposition the view if needed.

- click on the Construction line icon again to remove the blue highlighting to return to drawing normal lines.


- draw a **line** from the top of the last line and to the left and type **f** to select **Fin_ThicknessDiv2**.

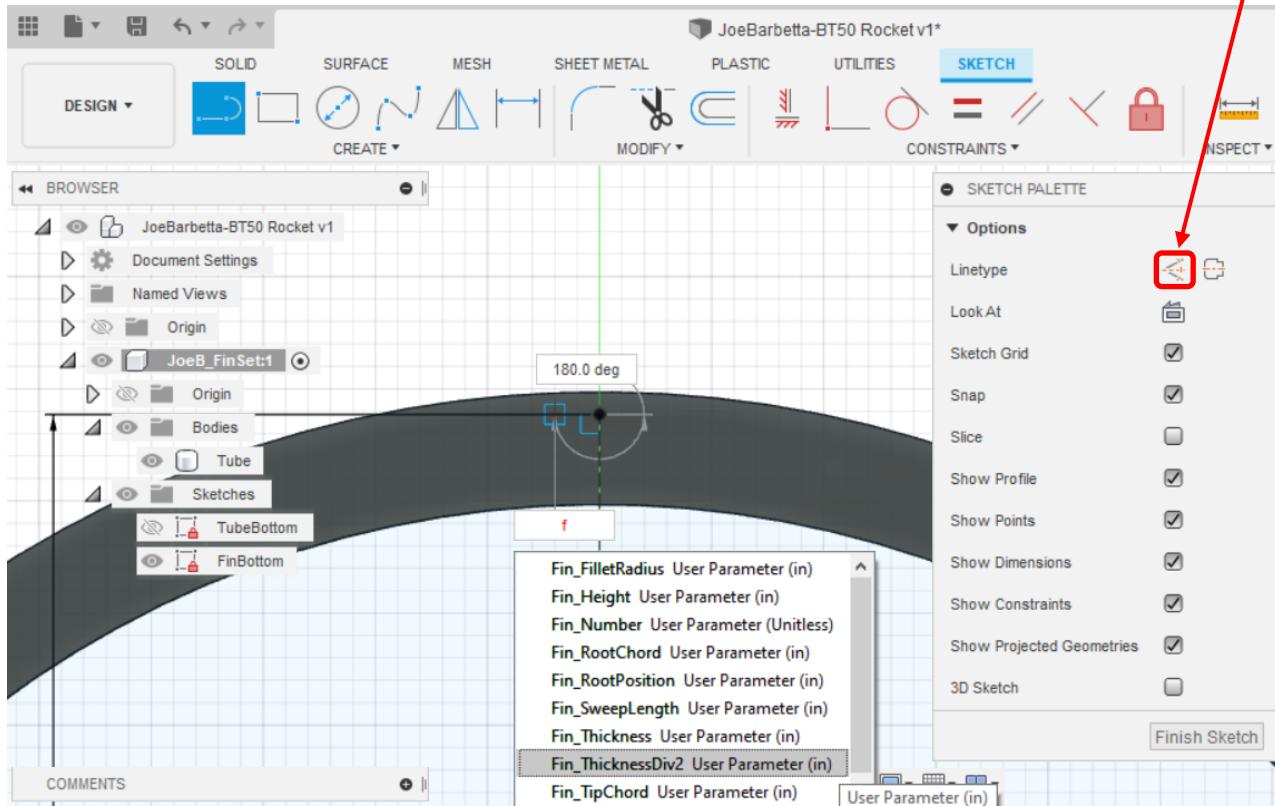


- draw a line the last line upward and type f to select Fin_Height. You will need to Zoom out for this.

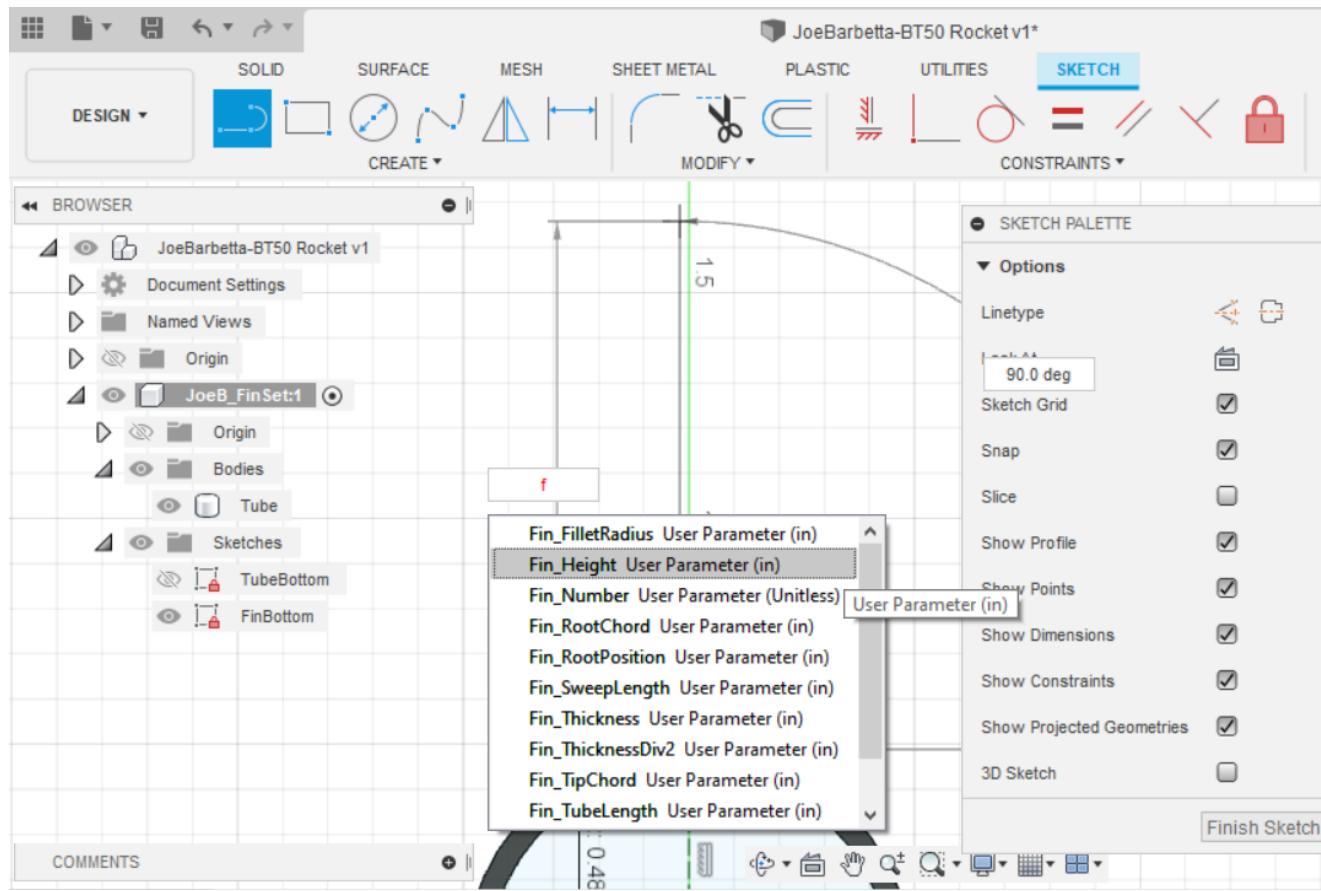


- from that point draw a line a small amount to the right, type f and select Fin_Thickness.

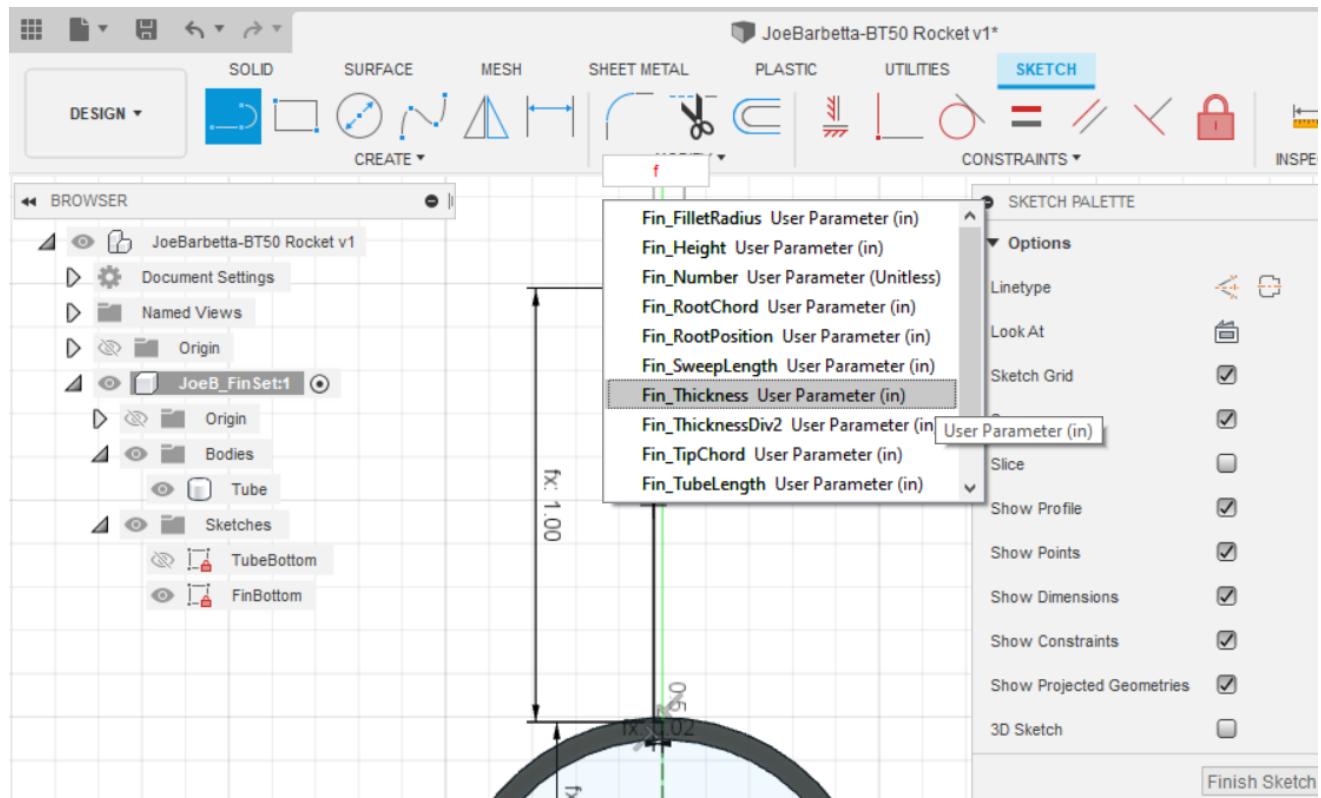

- from that point draw a line down, type f and select Fin_Height.

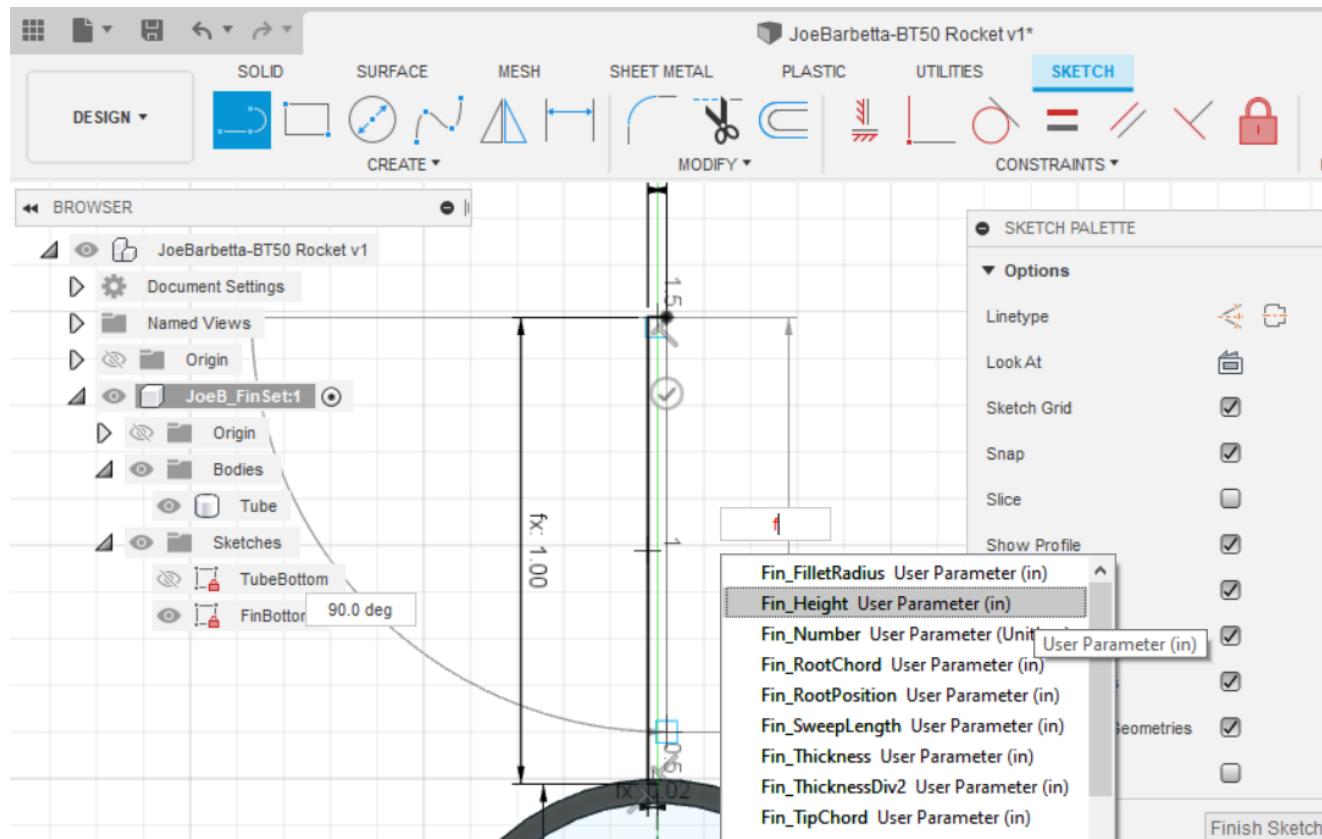


- from that point draw a to the left slightly to close the rectangle.

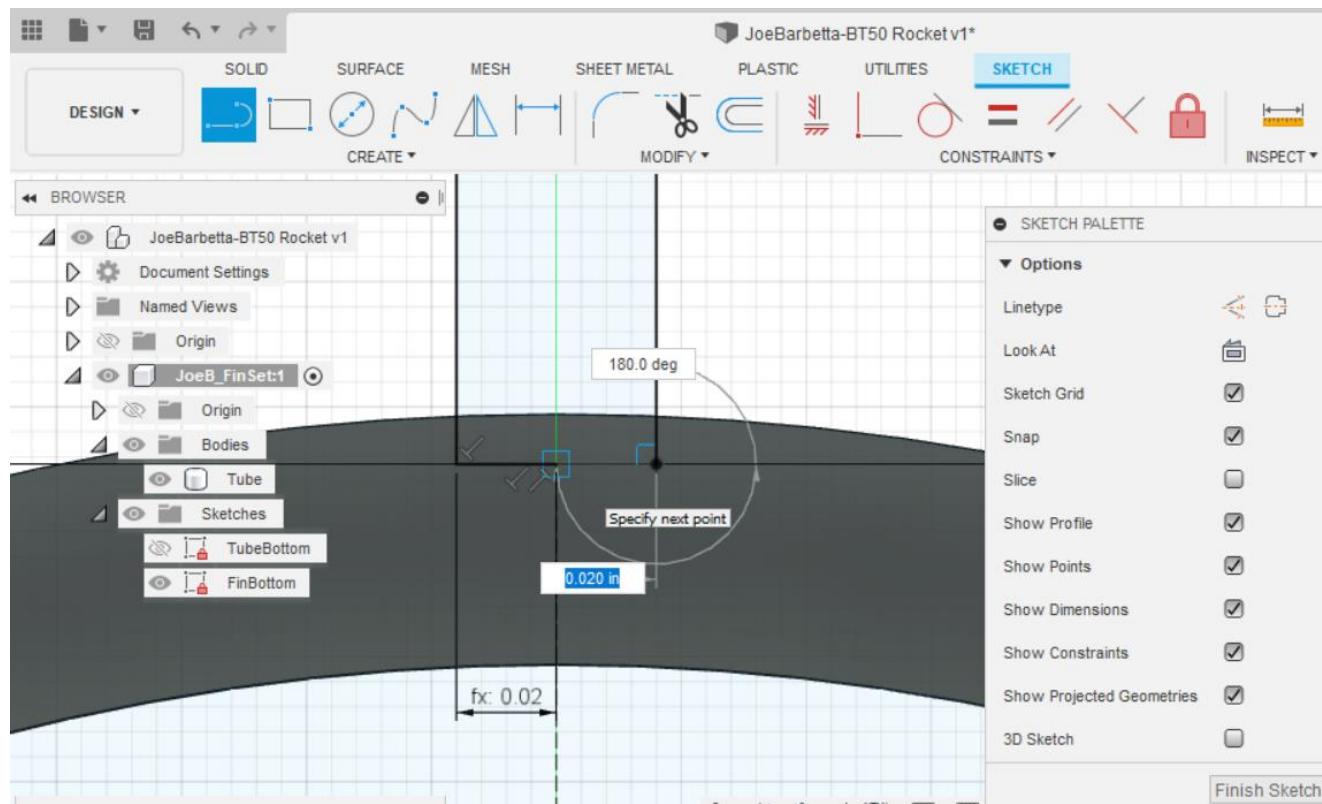


Creating a Circular Pattern


- zoom out and click on **CREATE** and select **Circular Pattern** near the bottom of the list.
- double-click on any edge of the rectangle. This should cause each edge to turn blue.

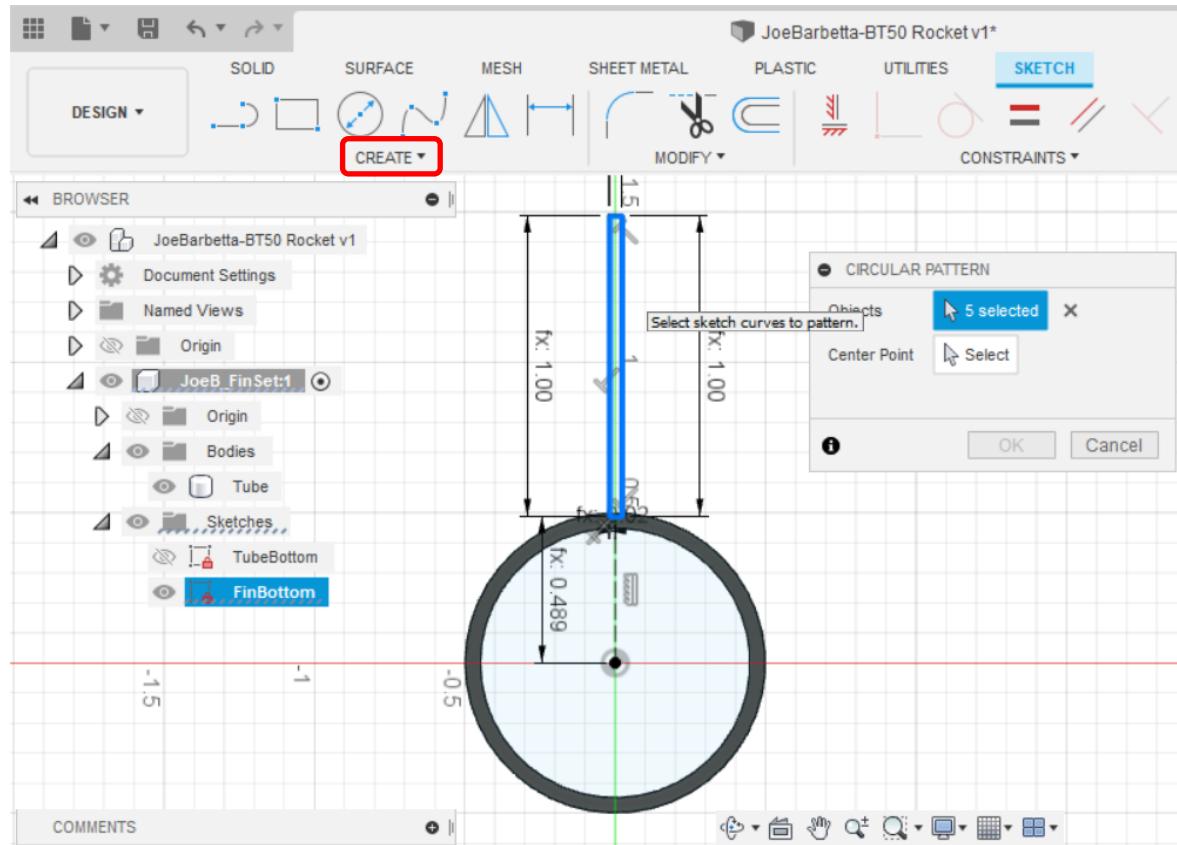


- click next to **Center Point** and click on the center of the circle.
- type **f** and select **Fin_Number**. Then click **OK**.

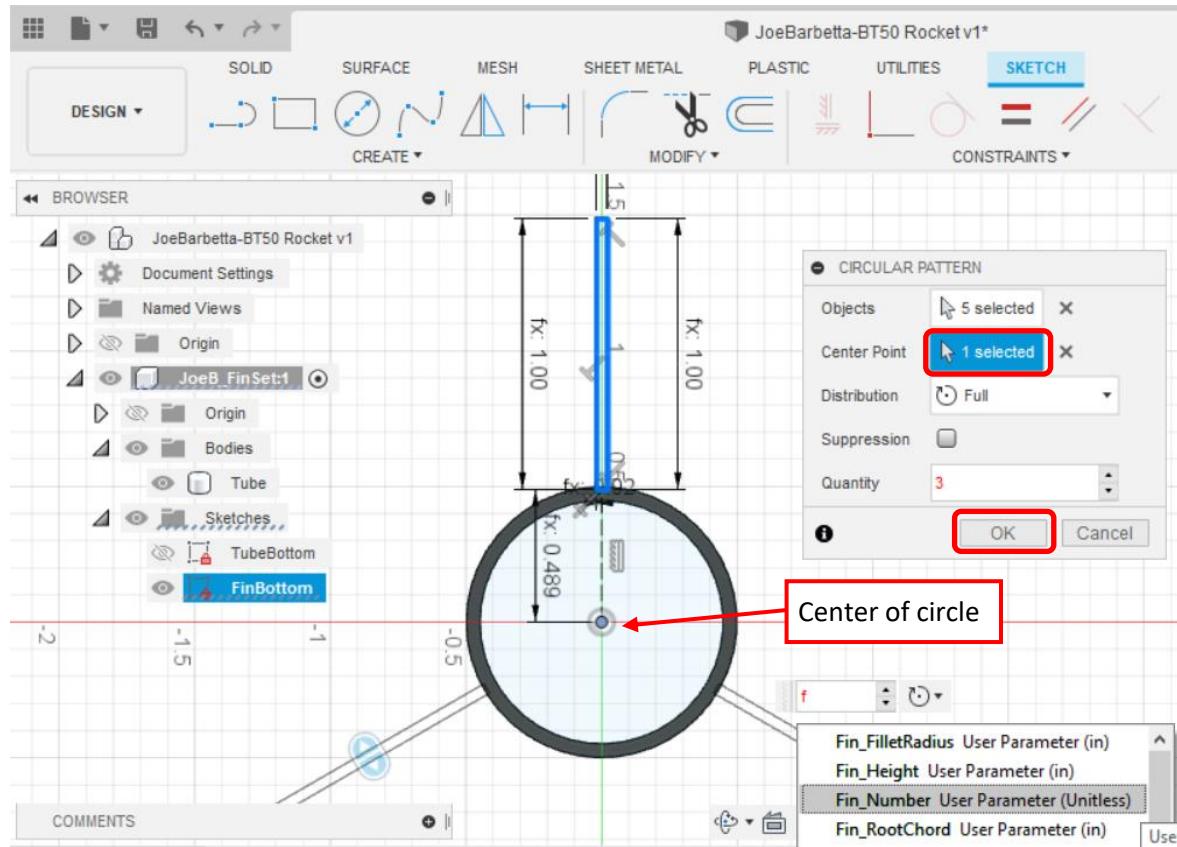


- click **Finish Sketch**.

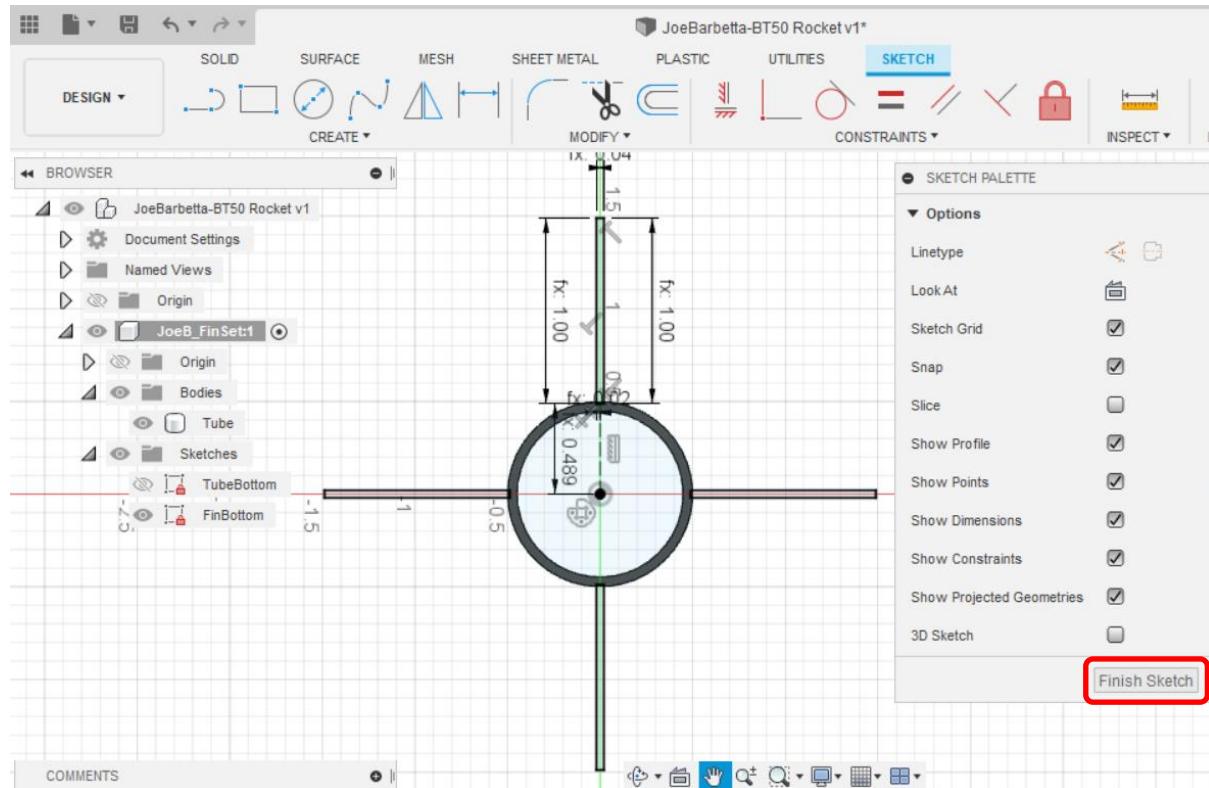


Click on the **Home** icon at the top-left of the **View Cube**. This will reset the view.

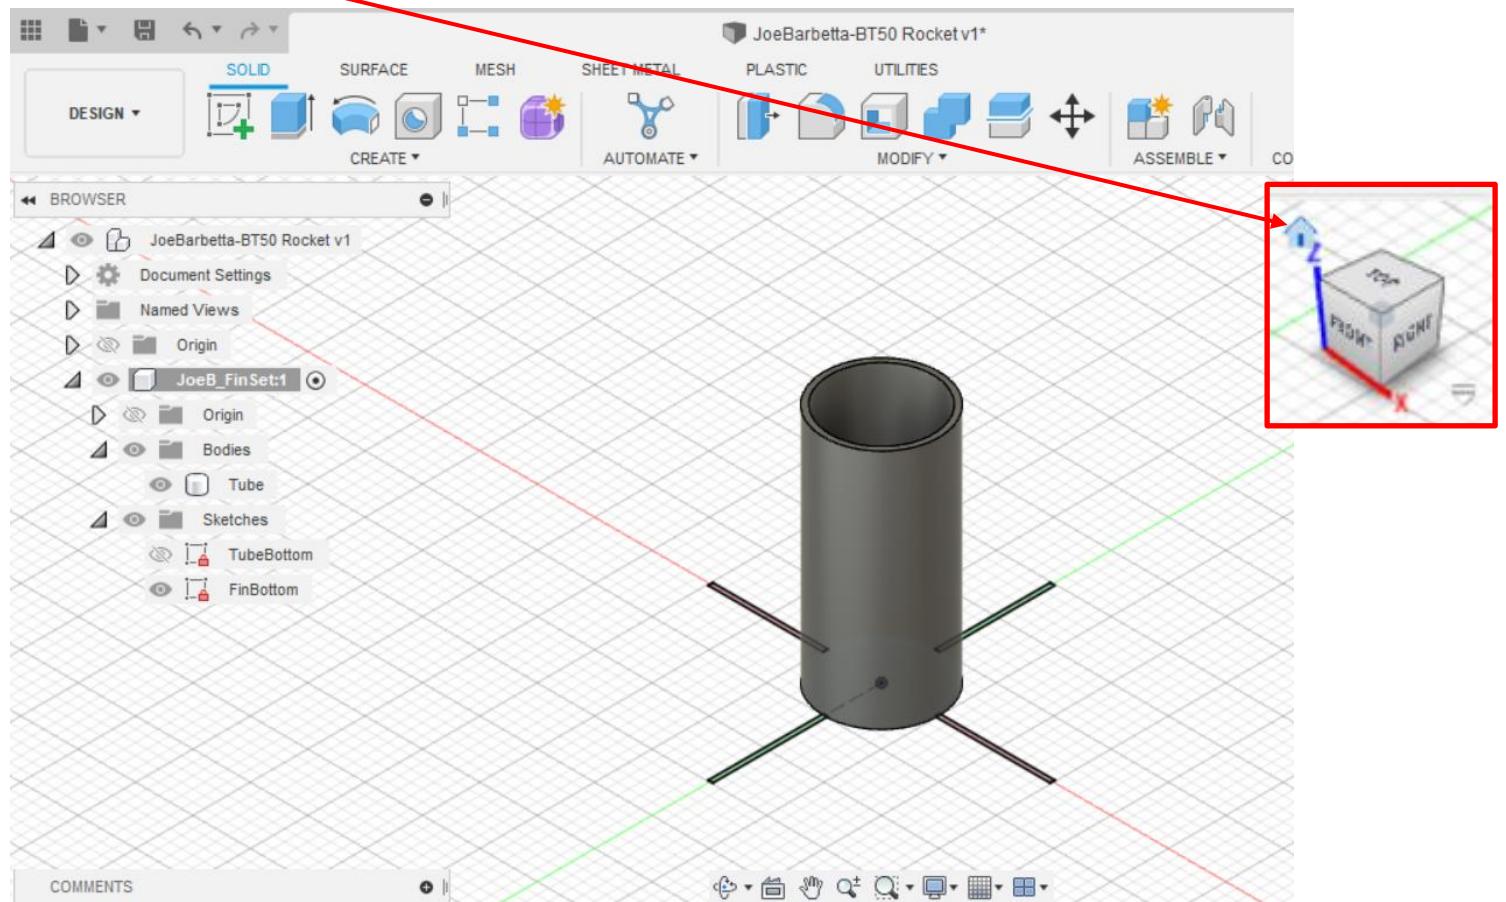

- zoom in and position, using the bottom hand icon if needed, the view as shown below.
- click of top **Extrude** tool and click on each fin *Profile* rectangle, which will cause them to turn blue.
- type **-f** and select **Fin_RootChord**. The **minus sign must be typed first** to cause the fins to be extruded up. Otherwise, they will extrude down. We need the negative because we created the Sketch from the underside.
- ensure that **Join** is selected for the **Operation**. Sometimes the operation can change and it has to be changed again.

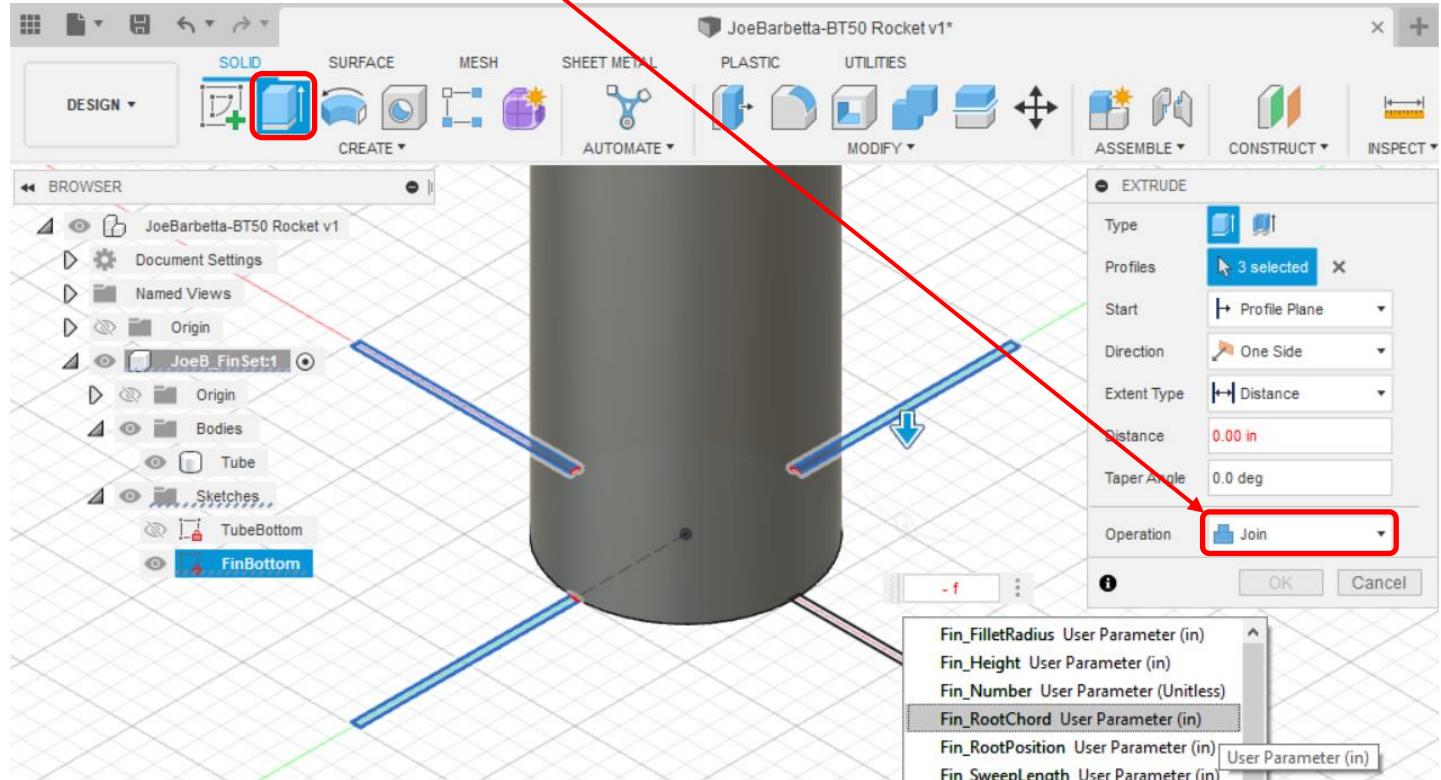


Click on the **Home** icon at the top-left of the **View Cube**. This will reset the view. See note at bottom of page.

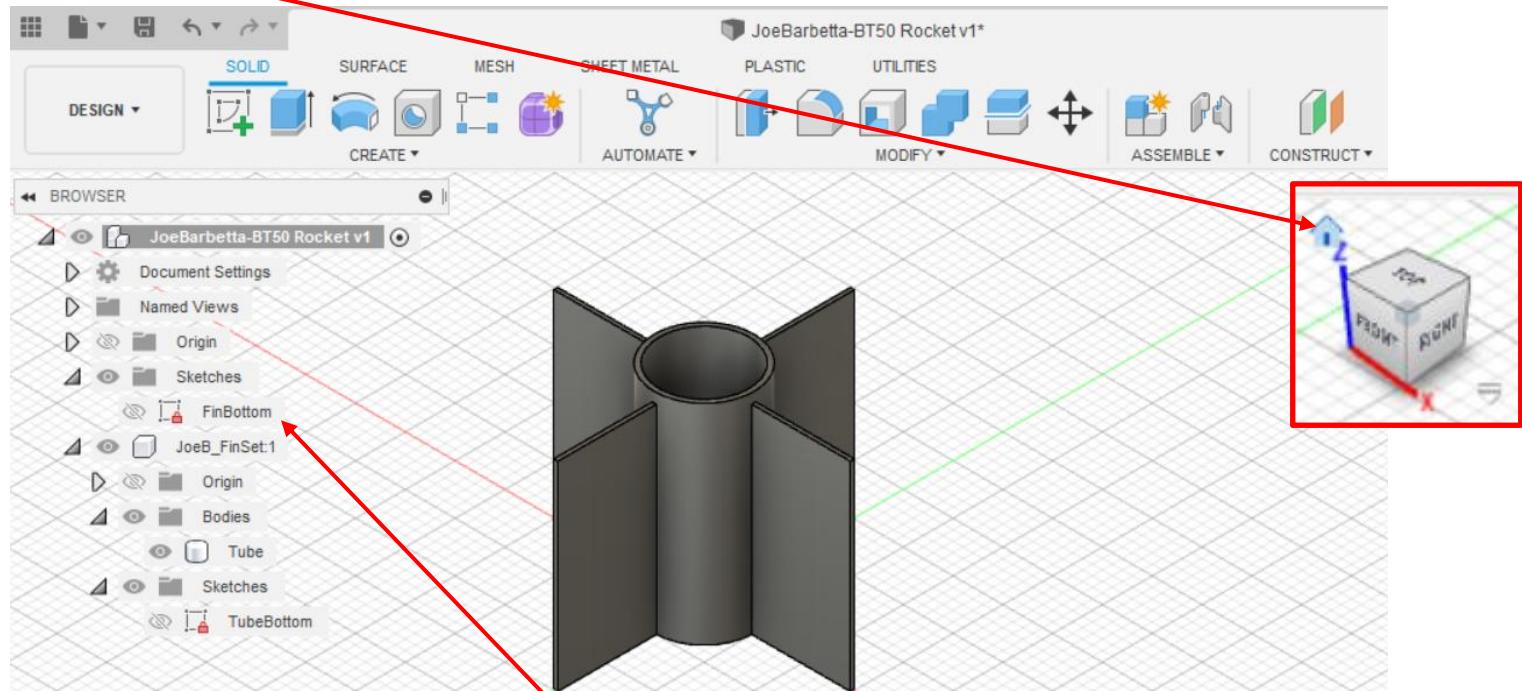


Here is shown the result of a common mistake, wherein the **FinBottom Sketch** was started without the **JoeB_FinSet** being the **Active Component**. If this occurred, **right-click on the Sketch name and select Activate** and then **drag the Sketch name onto the FinSet Component name**, e.g. **JoeB_FinSet** here.

Using the Chamfer Tool

- under **MODIFY** select **Chamfer**
- each of the 4 top outer edges must be selected by **clicking on the background near the upper left of the edge and then releasing the mouse button after surrounding the edge with the Selection rectangle**. Below the last edge is being selected. Each edge should turn blue. Yes. They are small and hard to see.

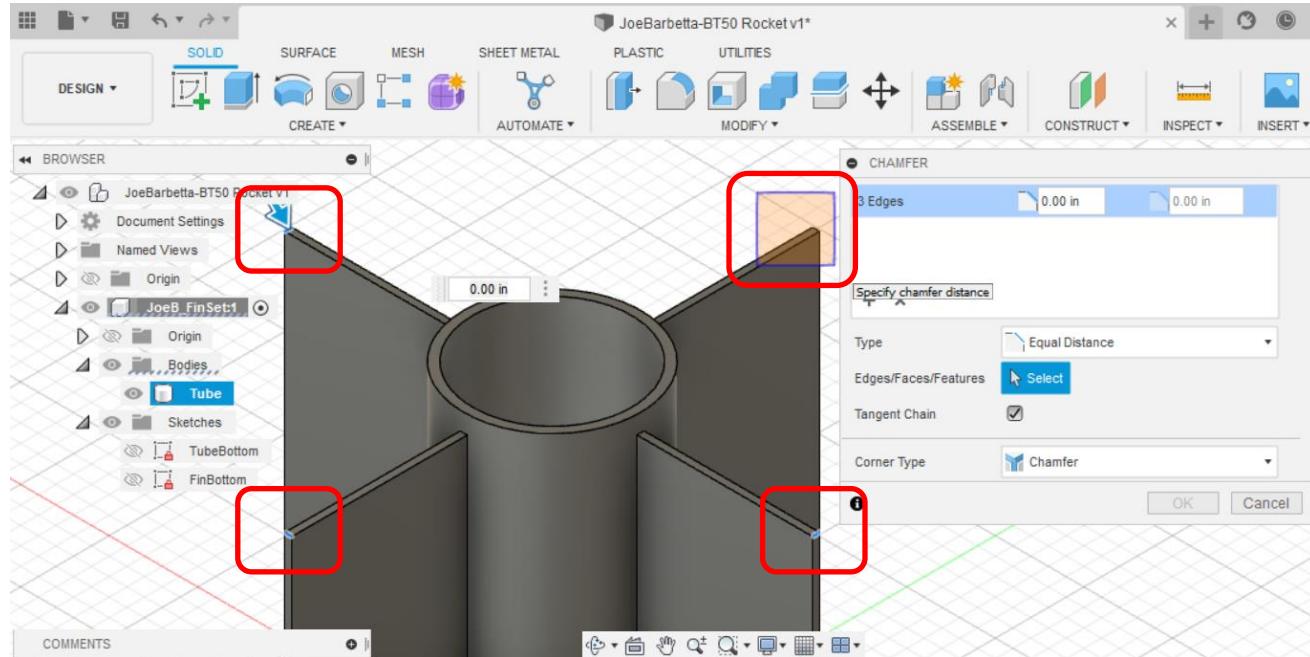


- in the **CHAMFER** window change **Type** from **Equal Distance** to **Two Distance**
- in the **1st dimension box** type **f** and then select **Fin_TopChamfer**.
- in the **2nd dimension box** type **f** and then select **Fin_SweepLength**

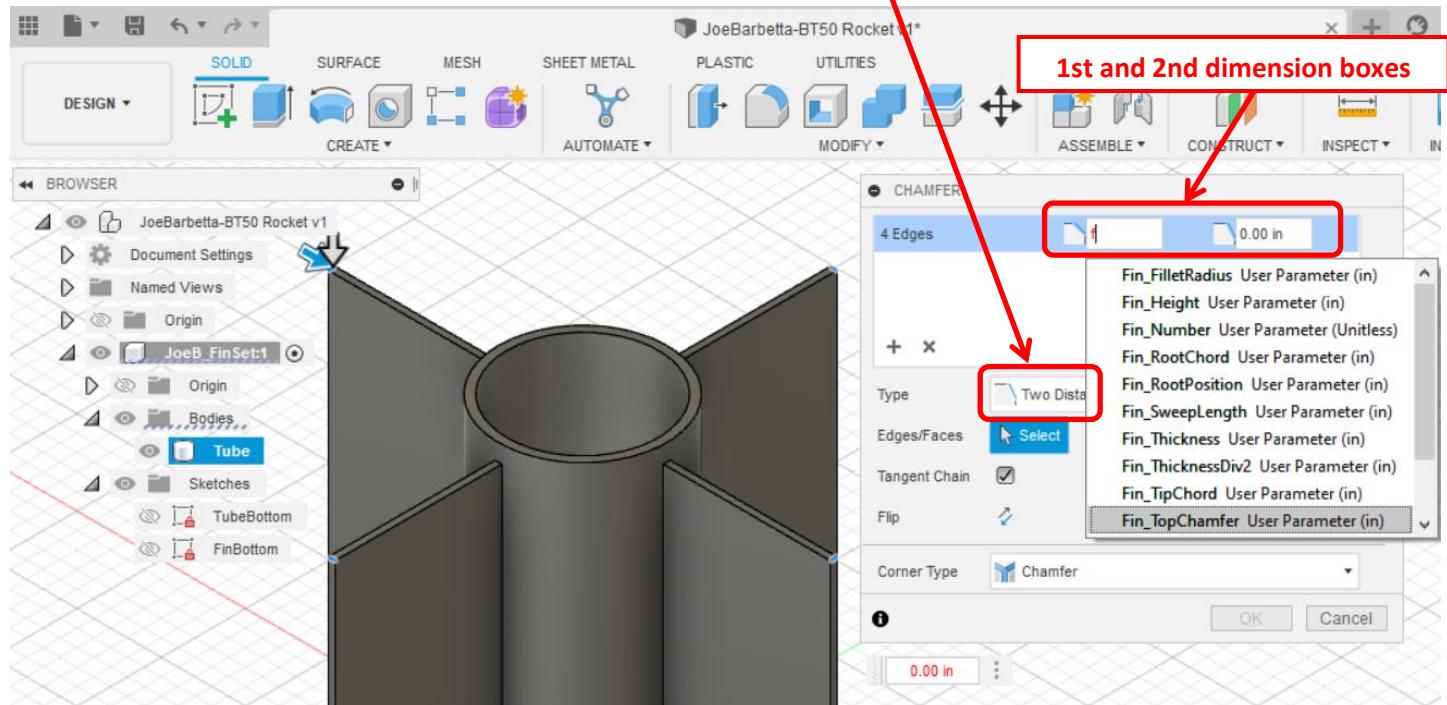

- when the parameters are selected, the FinSet Component should look as below.

- click **OK**

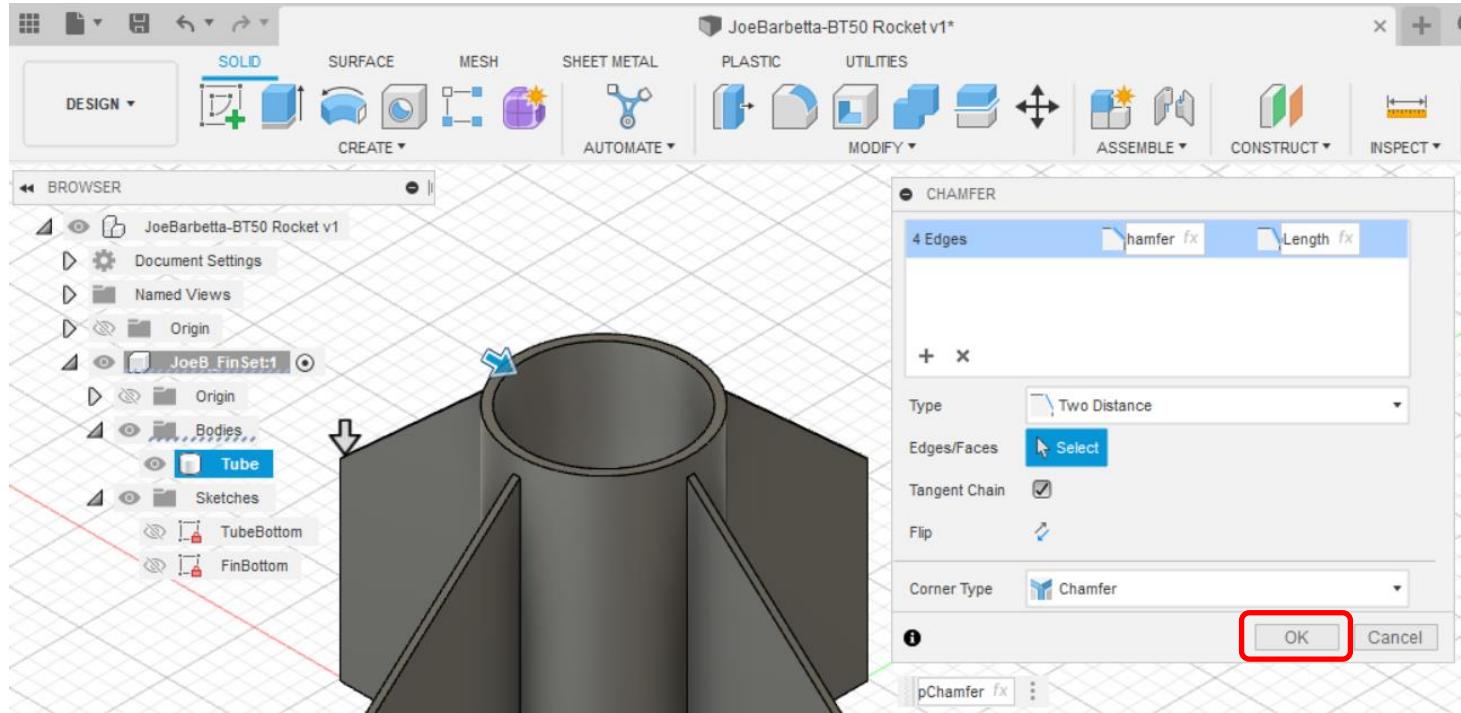

Using the Fillet Tool

- select the top **Fillet** tool or select it from the **MODIFY** menu


- adjust the view to be similar to below

- click on the edges where the fins connect to the tube. You should be able to select those on the other side of the tube that are hidden. This may be a pain in the butt. There should be **8 edges in total that are highlighted in blue** as shown below.


- type **f** and select **Fin_FilletRadius**. Then click **OK** and the fillets should show.

Pronounce the **t** in Fillet and Not like Fillet of fish.

8 Edges should show here.

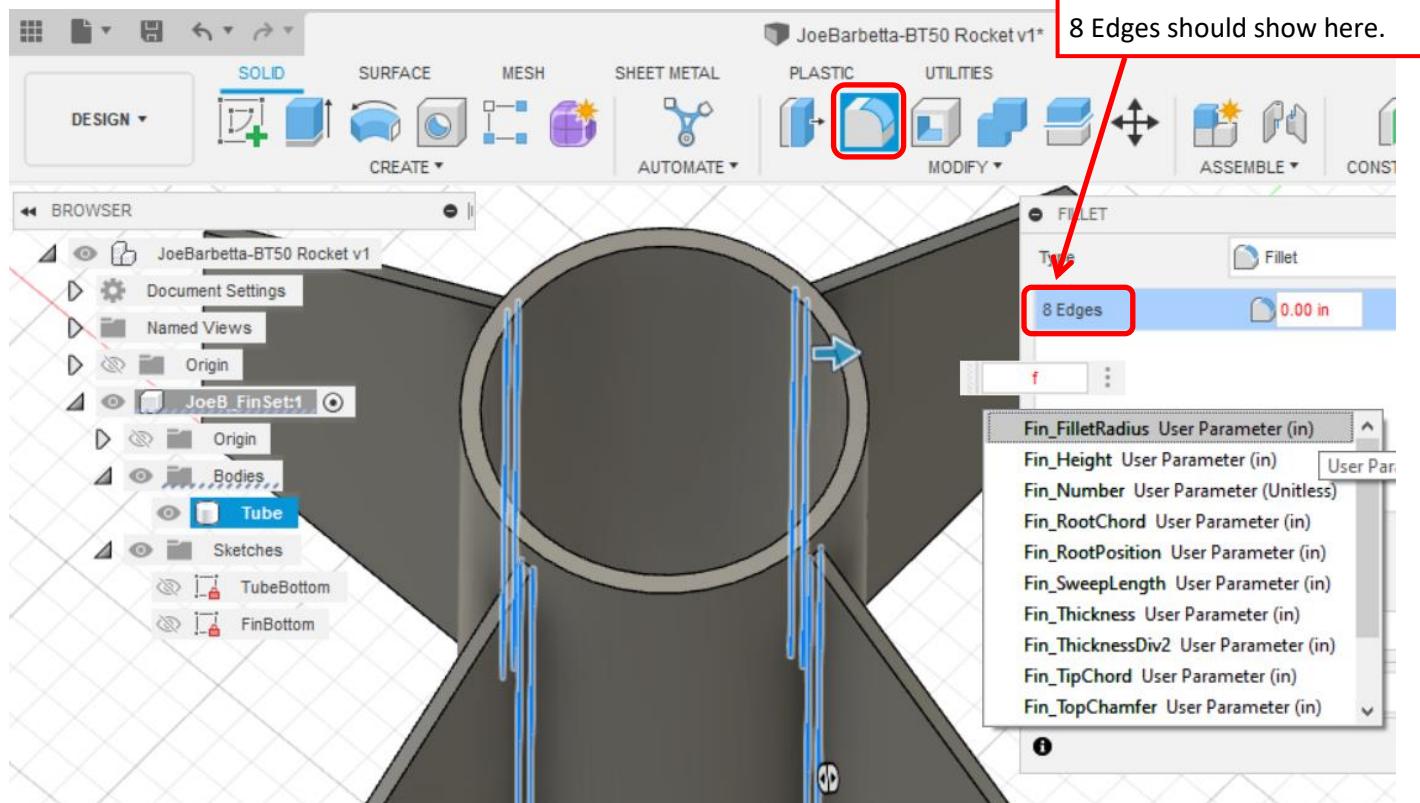

Fin Tube Coupling Ribs

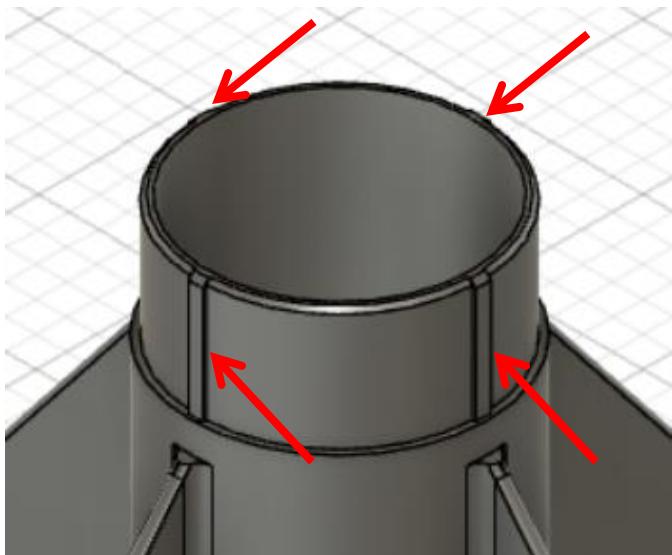

3D printed parts do not always print accurately. For example, the inner and outer dimensions of a tube can vary about 0.01". This tolerance doesn't matter for many dimensions, however, when components must fit together this can be a problem.

If the resultant outer diameter of a tube is larger than designed, it may have to be sanded down to fit inside another component. Plastic, especially PLA, which is the most common 3D printing material, is laborious to sand.


One solution is to make design the tube with a slightly smaller outer diameter and add ribs in the design. The design on the left has four ribs around the tube. This can result in a more reliable "push fit" into another tube. To correct the fit, the ribs can be sanded as needed or shaved down. It is much easier to sand down thin ribs compared to the entire tube outer surface.

As done previously, open the *Parameters window* and add additional parameters.

- from the top **MODIFY** menu select **Change Parameters** near the bottom of the list
- next to **User Parameters** click on + and enter the **Name** and **Expression** for each item in the below list. Note that you will need to click + for each item. You may be able to copy and paste Expressions, but **if it shows as red you may have to type the expression.**
- **Don't forget to click OK when done!**

Name	Expression
Fin_TubeCouplingID	Fin_TubeOD - Fin_TubeThickness * 2
Fin_TubeCouplingOD	0.940
Fin_TubeCouplingLength	0.400
Fin_TubeCouplingRibOD	0.970
Fin_TubeCouplingRibPos	Fin_TubeCouplingID / 2 - 0.01

- click on the top **Sketch** icon and click on the top of the fin set.

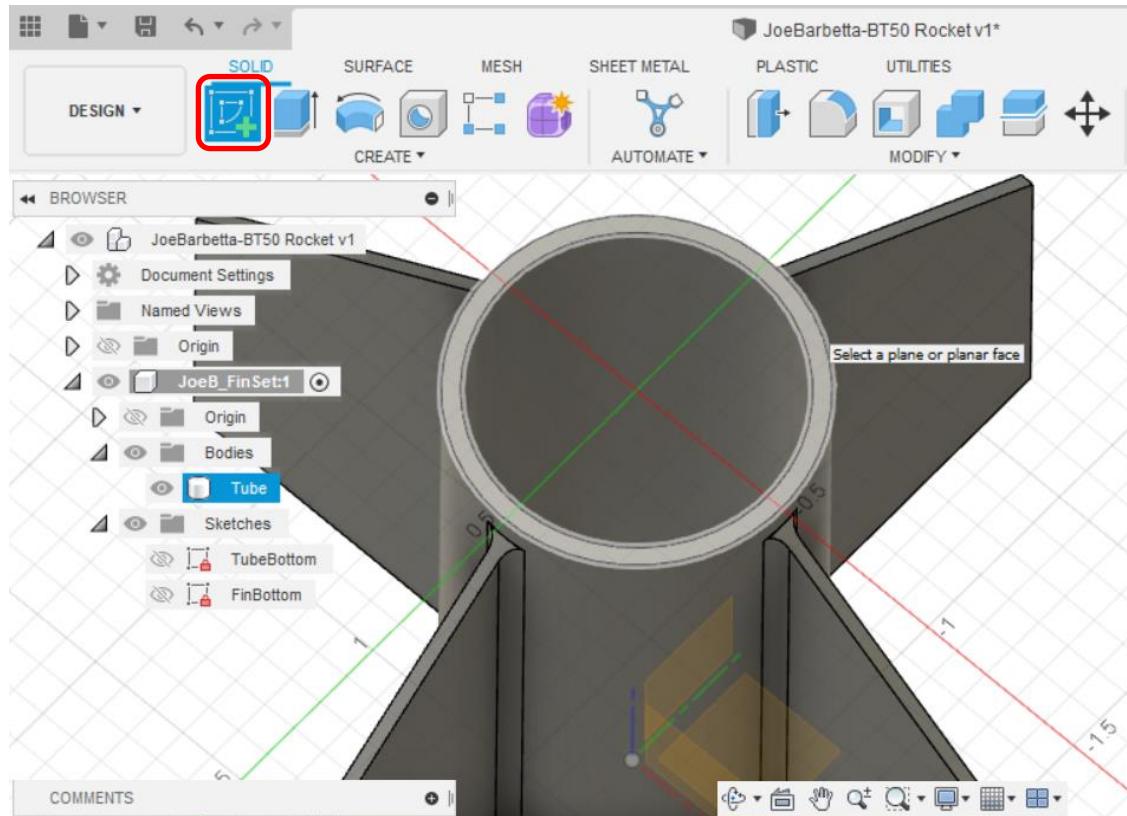


- select the **Circle** tool over **CREATE**


- place the center point at the center of the tube and left-click

At this point the circle size will change with mouse moves and the dimension box will show with a blue value. Type the first letter of the parameter you want to use, **f**, and a list of parameters starting with that letter will appear.


- select the **Fin_TubeCouplingID** parameter in the list and then press **Enter**. OD stands for *Inner Diameter*.

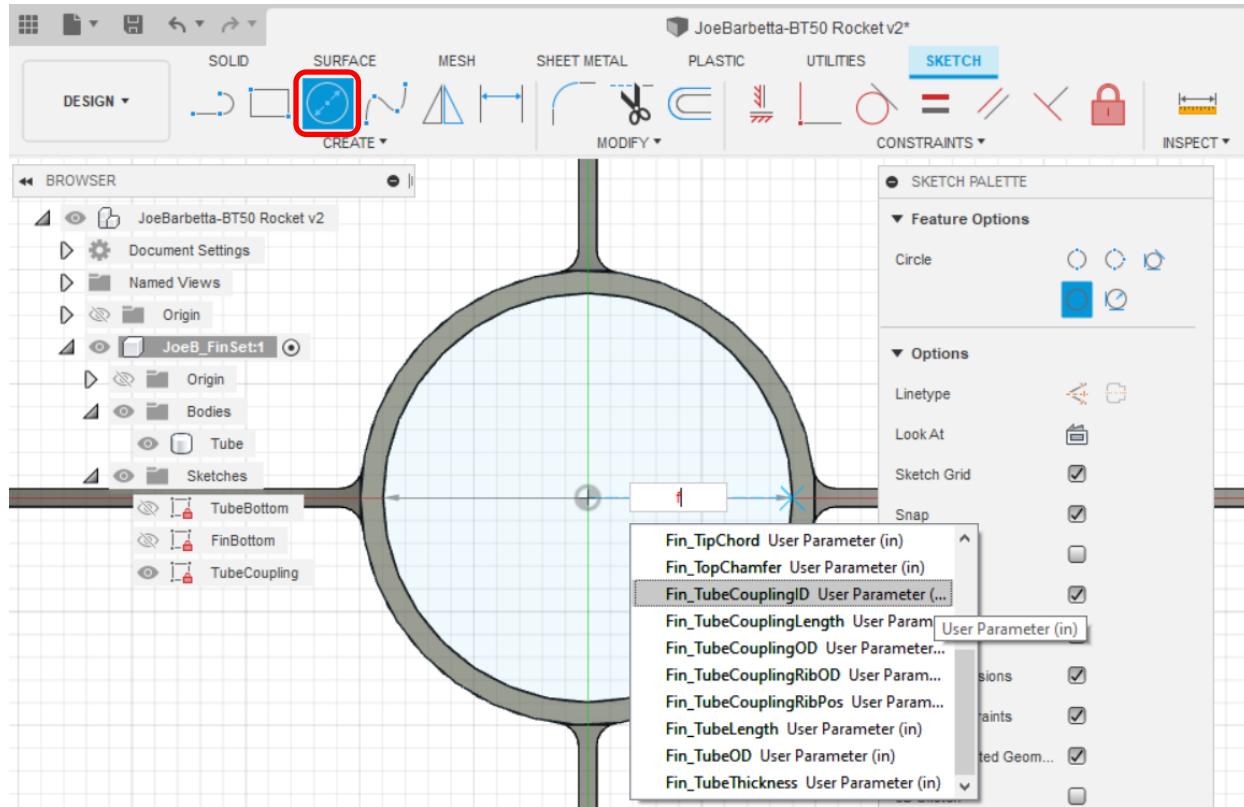


- create a 2nd circle from the center point and select the **Fin_TubeCouplingOD**

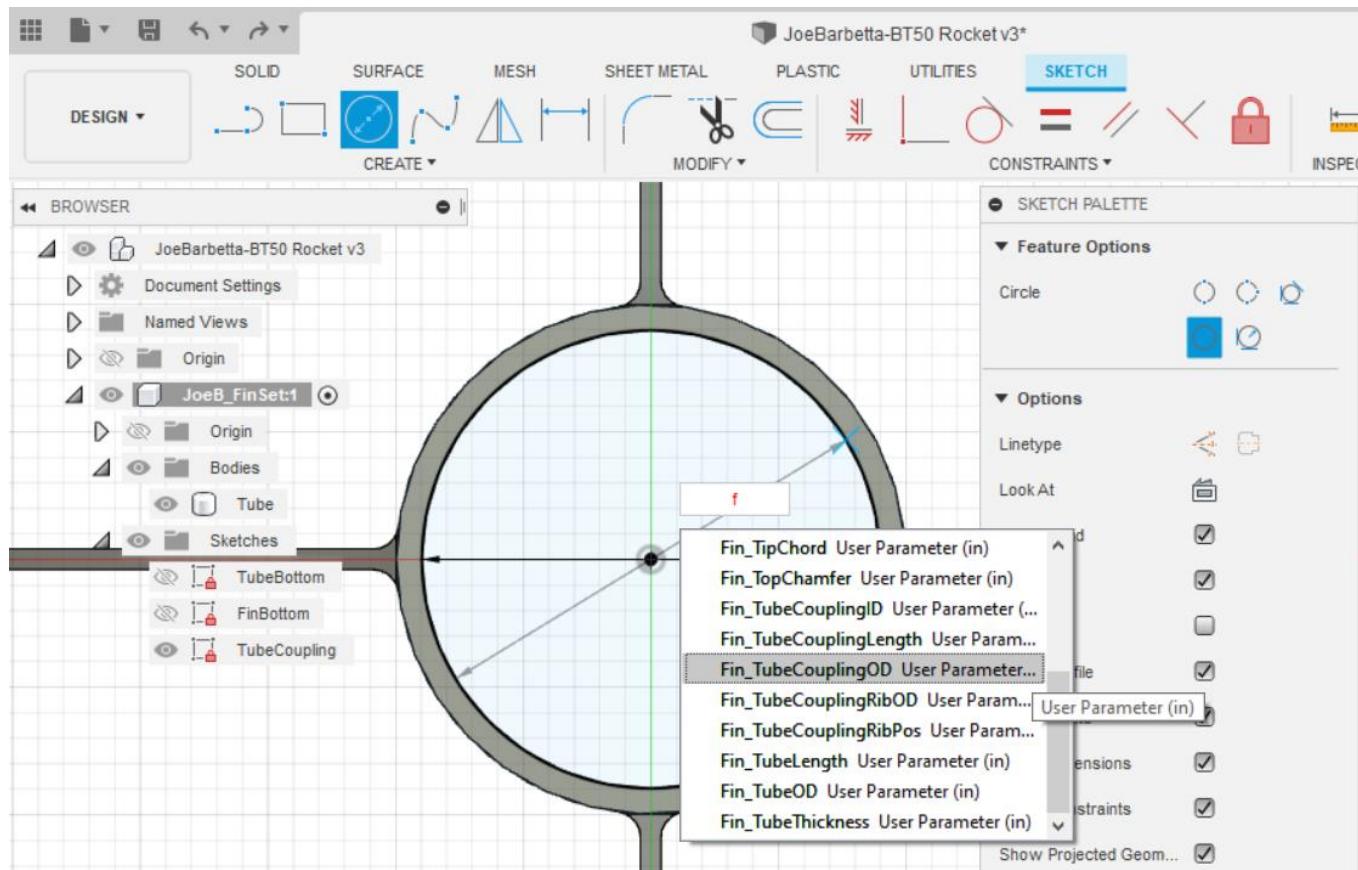


- create a 3rd circle from the center point and select the **Fin_TubeCouplingRibOD**

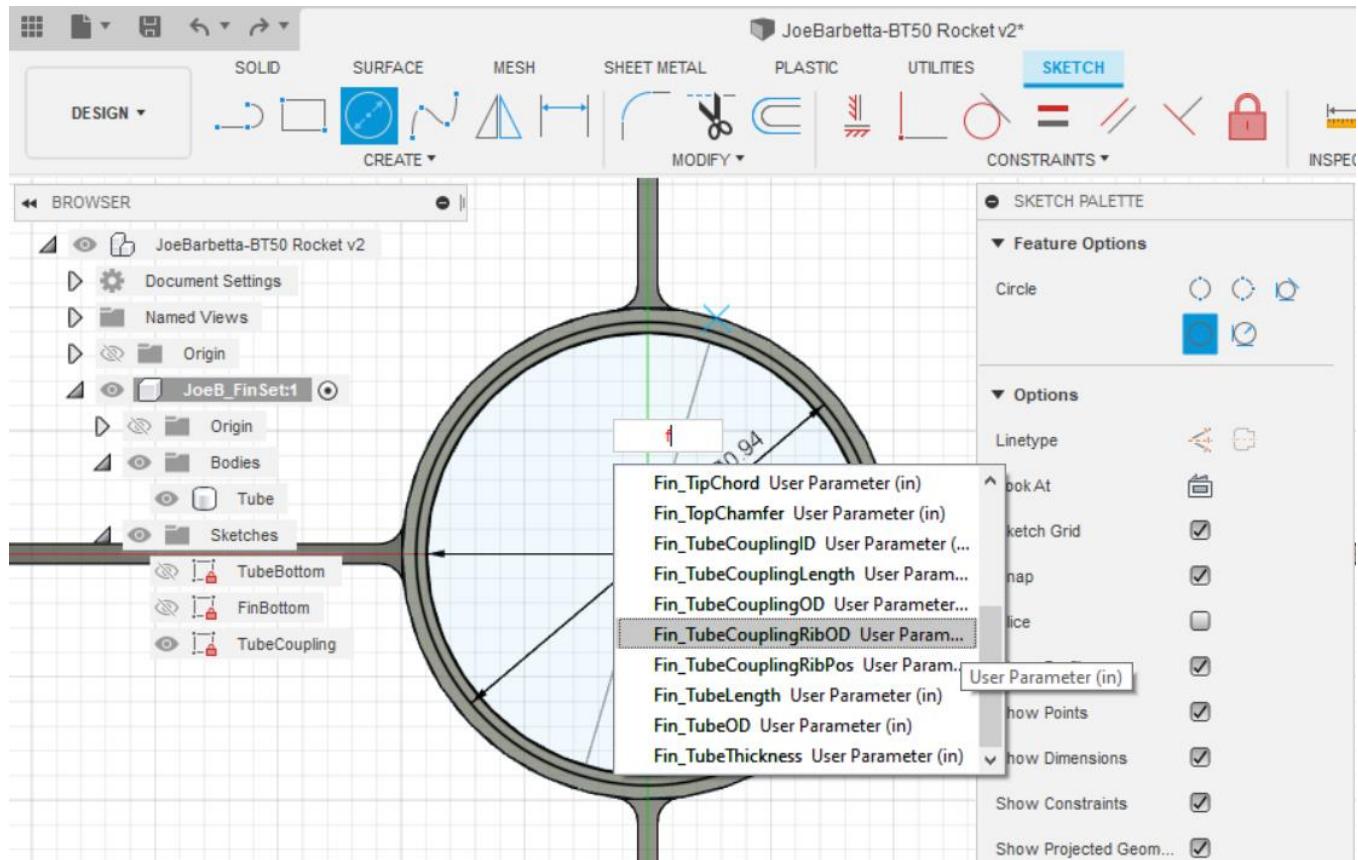


- click on the **Line** icon and on the Sketch Palette window click on the **1st icon next to Linetype** for a *Construction line*.
- draw a line starting at the center of the circles up towards the edge of the tube, type **f** and select **Fin_TubeCouplingRibOD**.

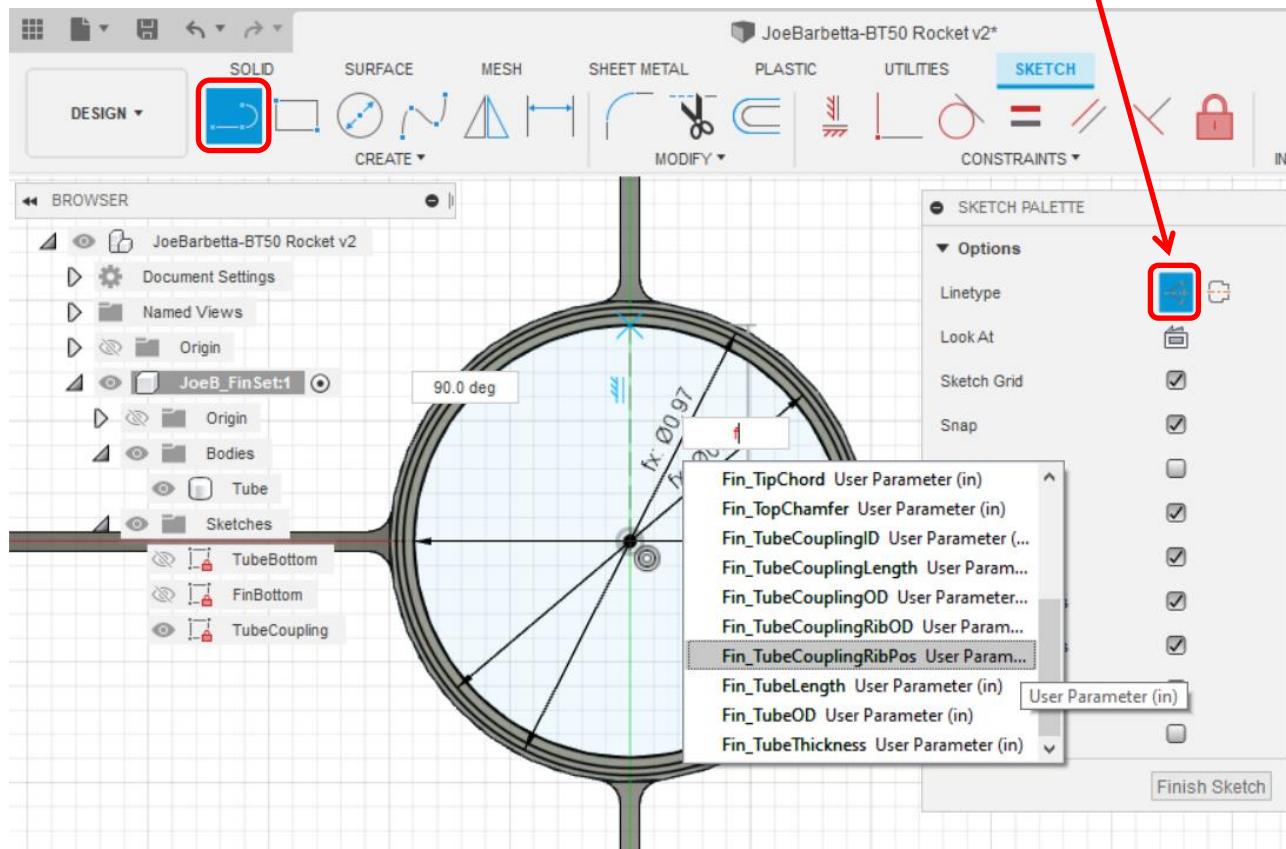


- zoom in to the top of the tube. This will now be like brain surgery under a microscope.
- click on the Construction Line icon again to turn off the highlighting.
- from the top of the Construction line draw a line to the left until the dimension box shows 0.025. One can also type in 0.025.

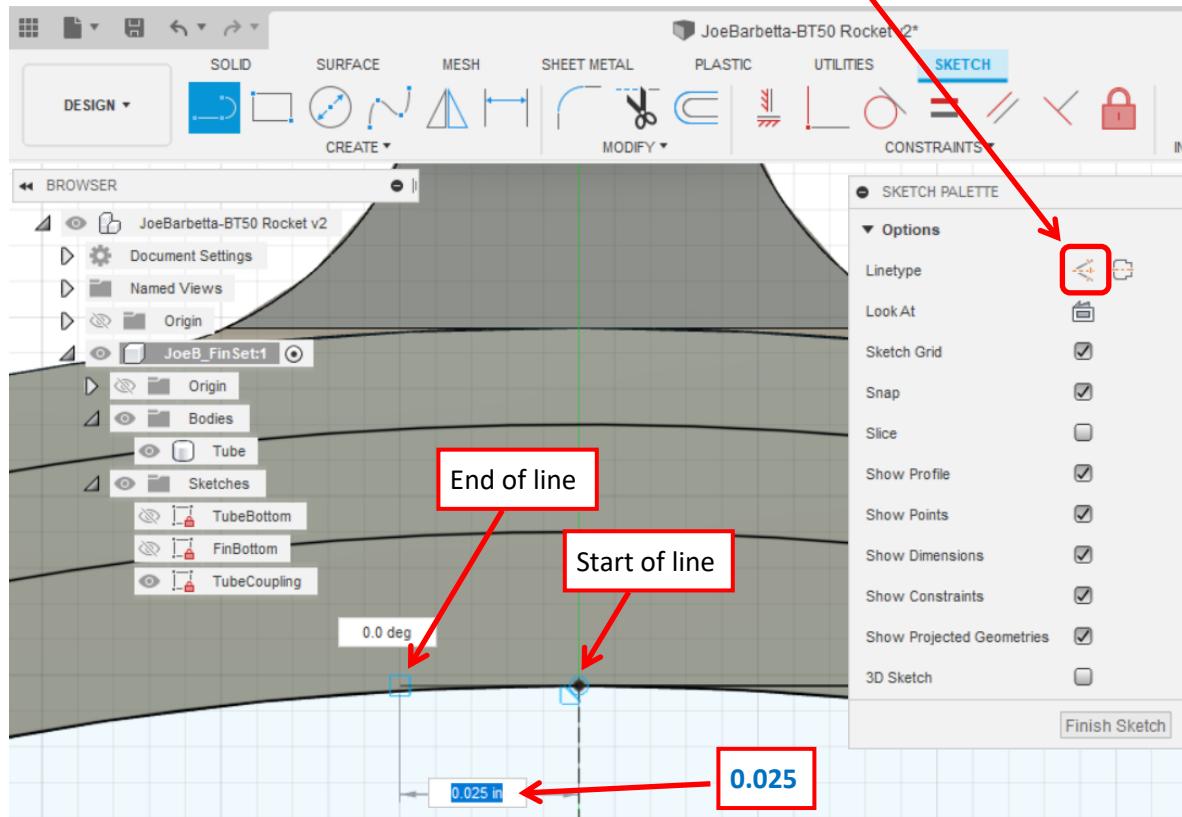


- draw a line from the last point up by 0.044.

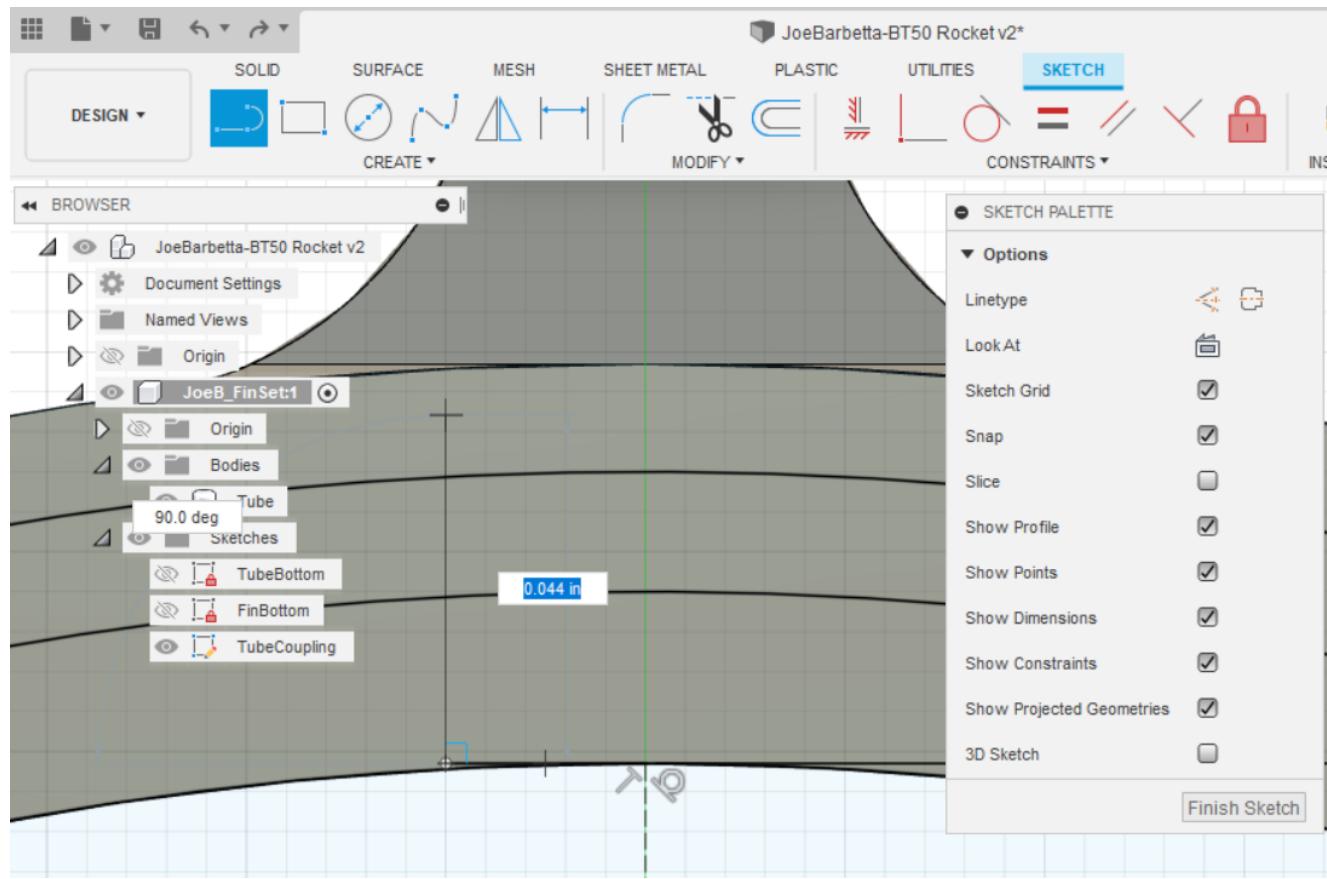


- draw a line from the last point to the right by 0.050.

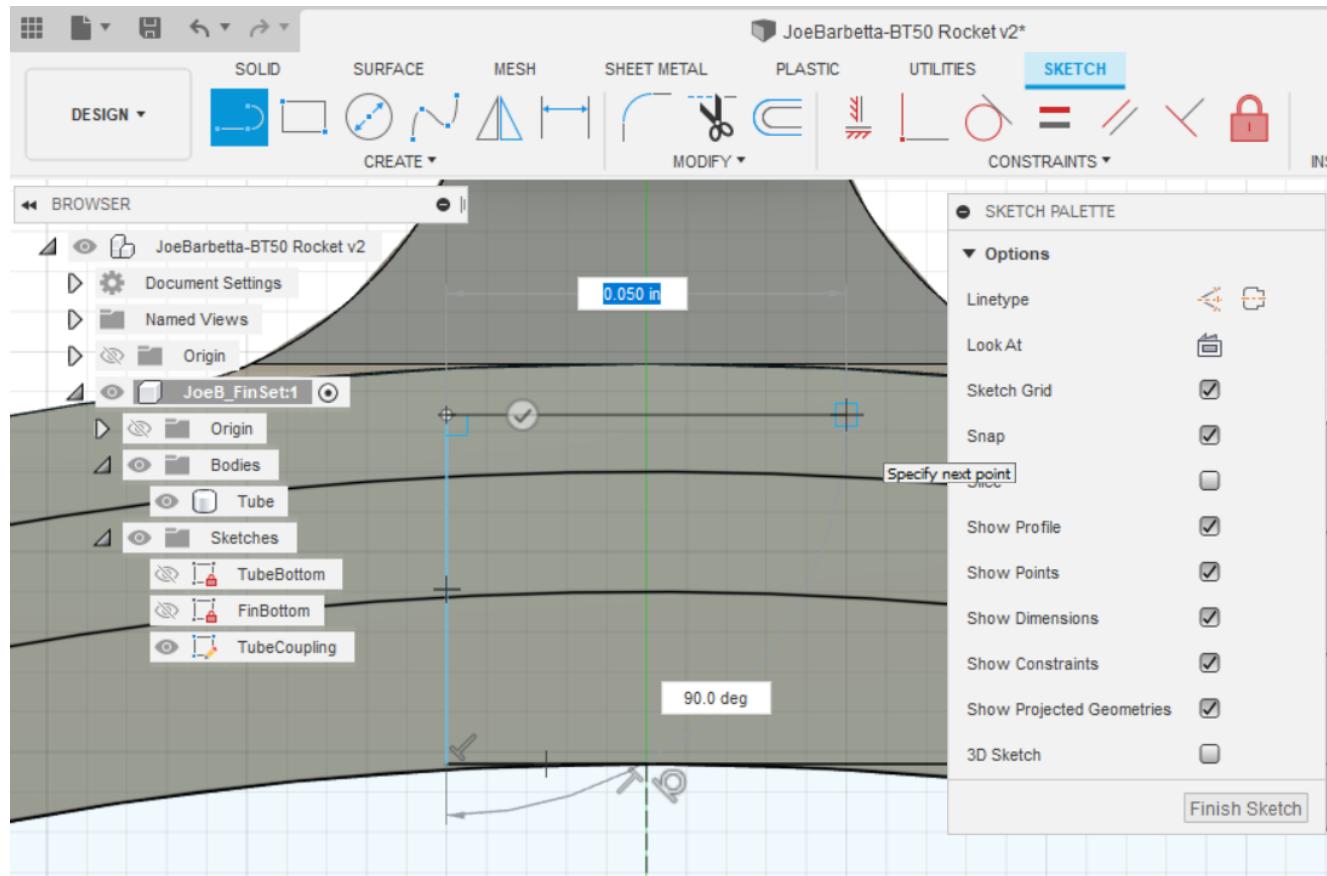

- draw a line from the last point to down by 0.044.

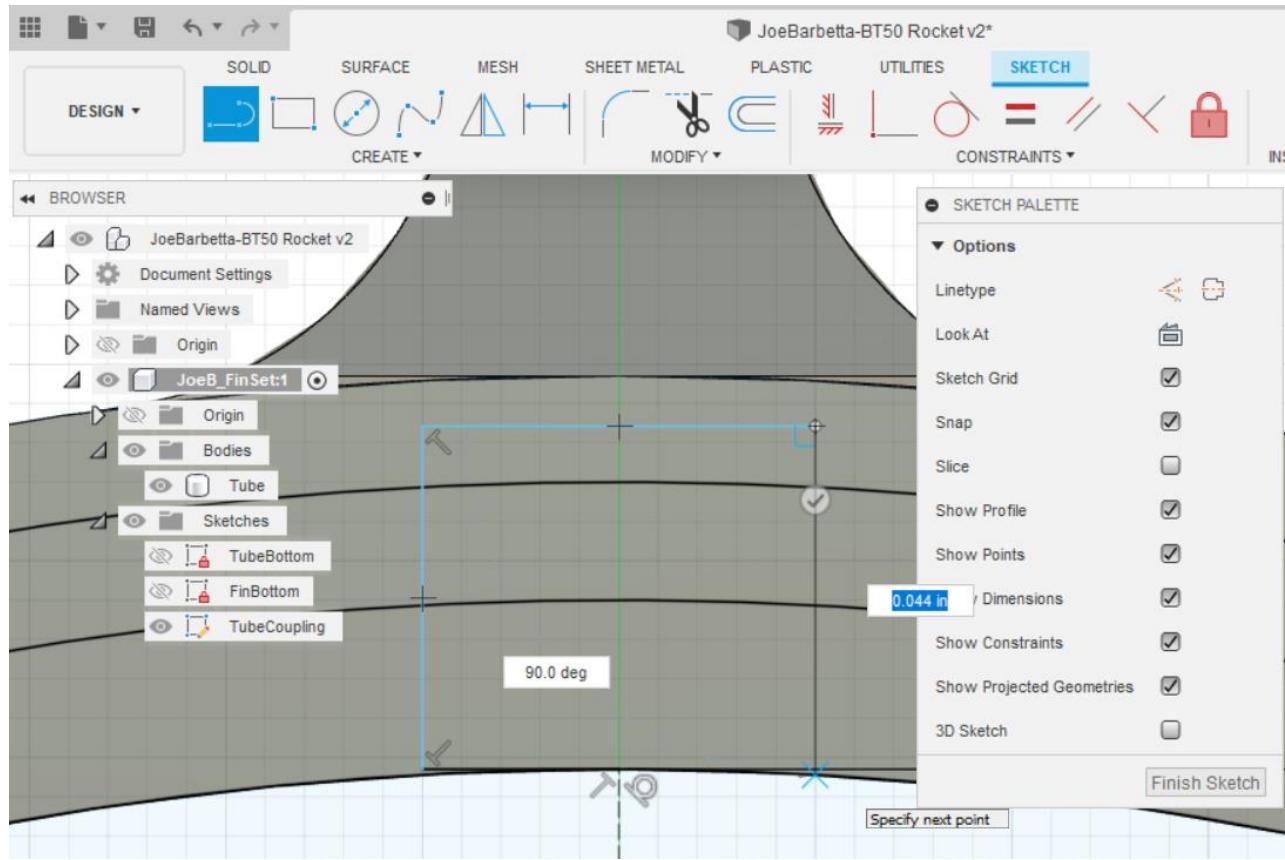


- draw a line from the last point to the left by 0.025. You should now have a closed rectangle.

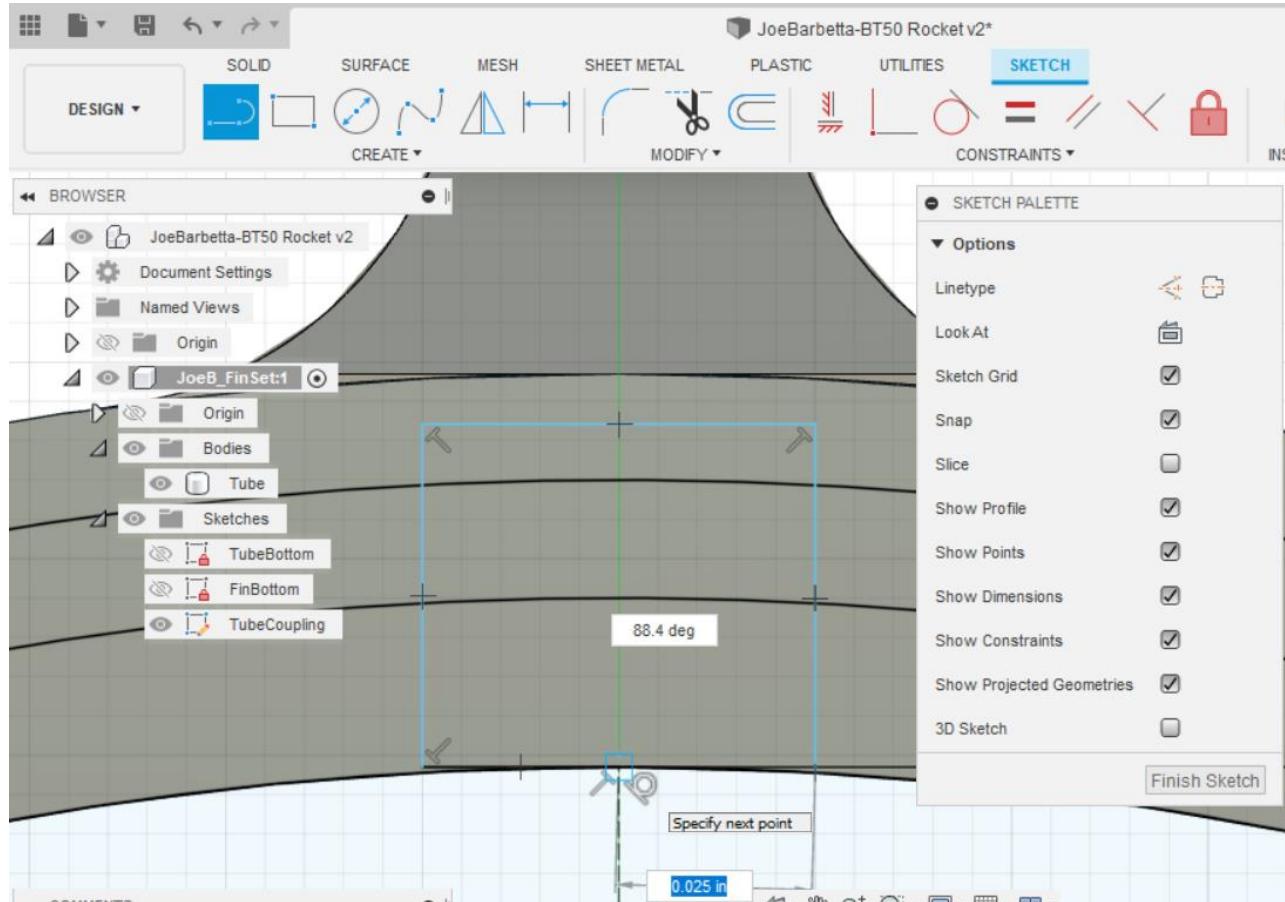


Using the Trim Tool


- select the Trim tool. Click on the top 3 segments (indicated with arrows below) to remove them.

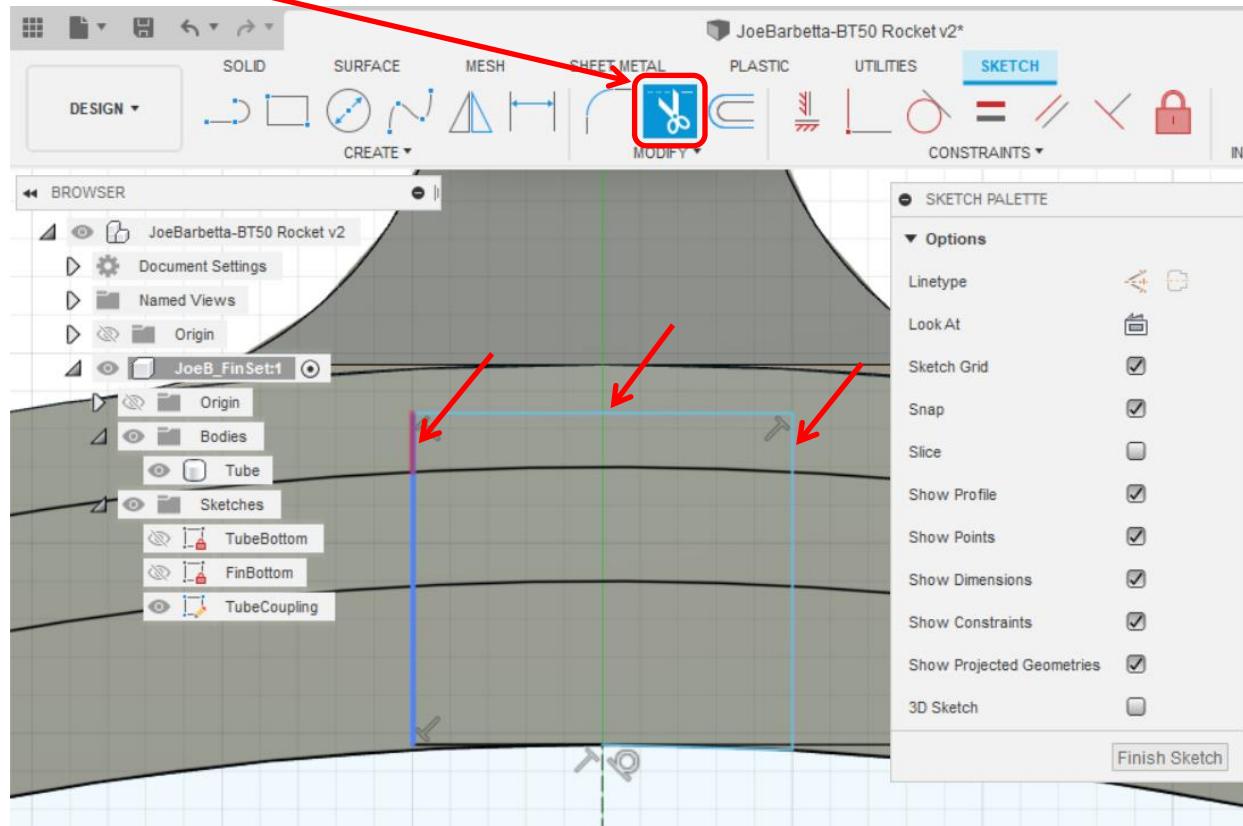


- Click once on the outer circle, either to the left or right of rectangle that you just created, to remove the violet portion of the circle. This will leave a rectangle with a slightly curved top.

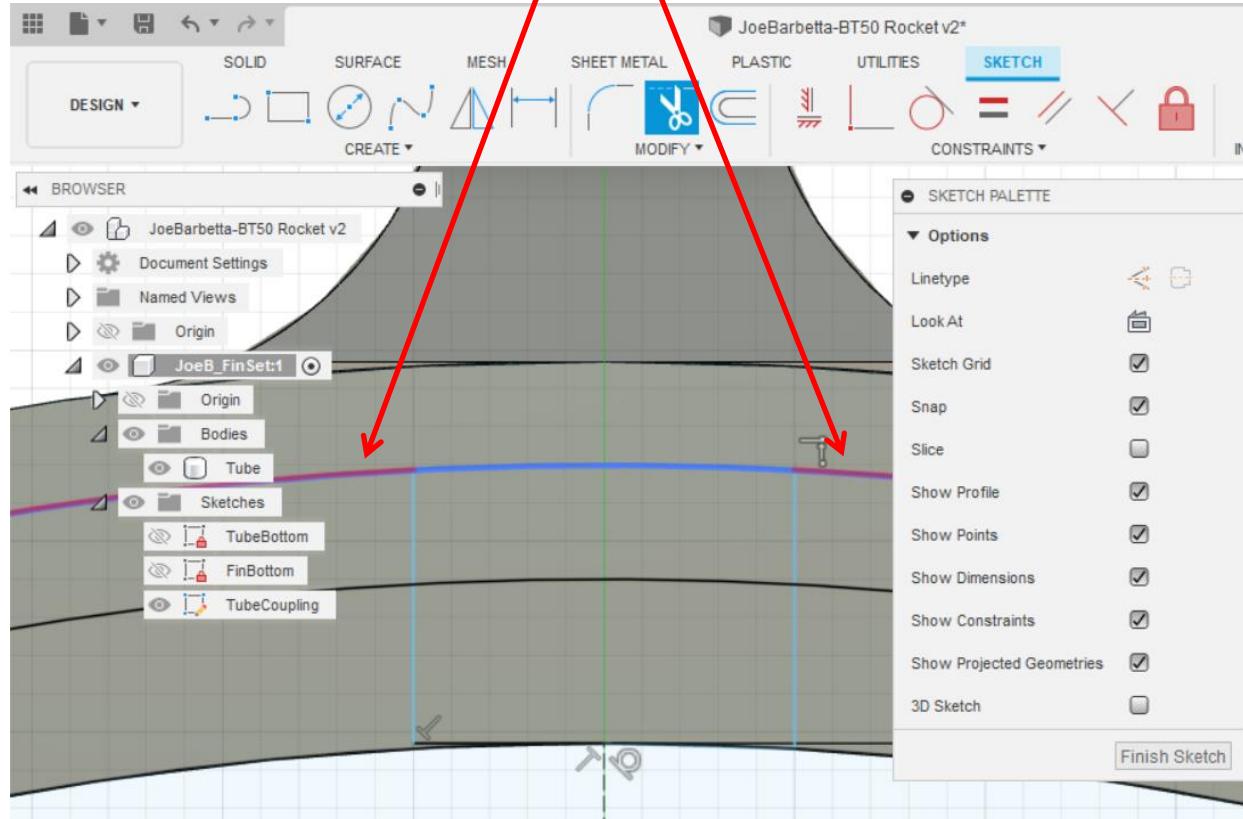


- zoom out as shown below. As stated in earlier sections, **don't worry if the light Dimension lines look different**
- from the **CREATE** menu select **Circular Pattern**
- double-click on the rectangle that you just created. Each edge should turn blue.

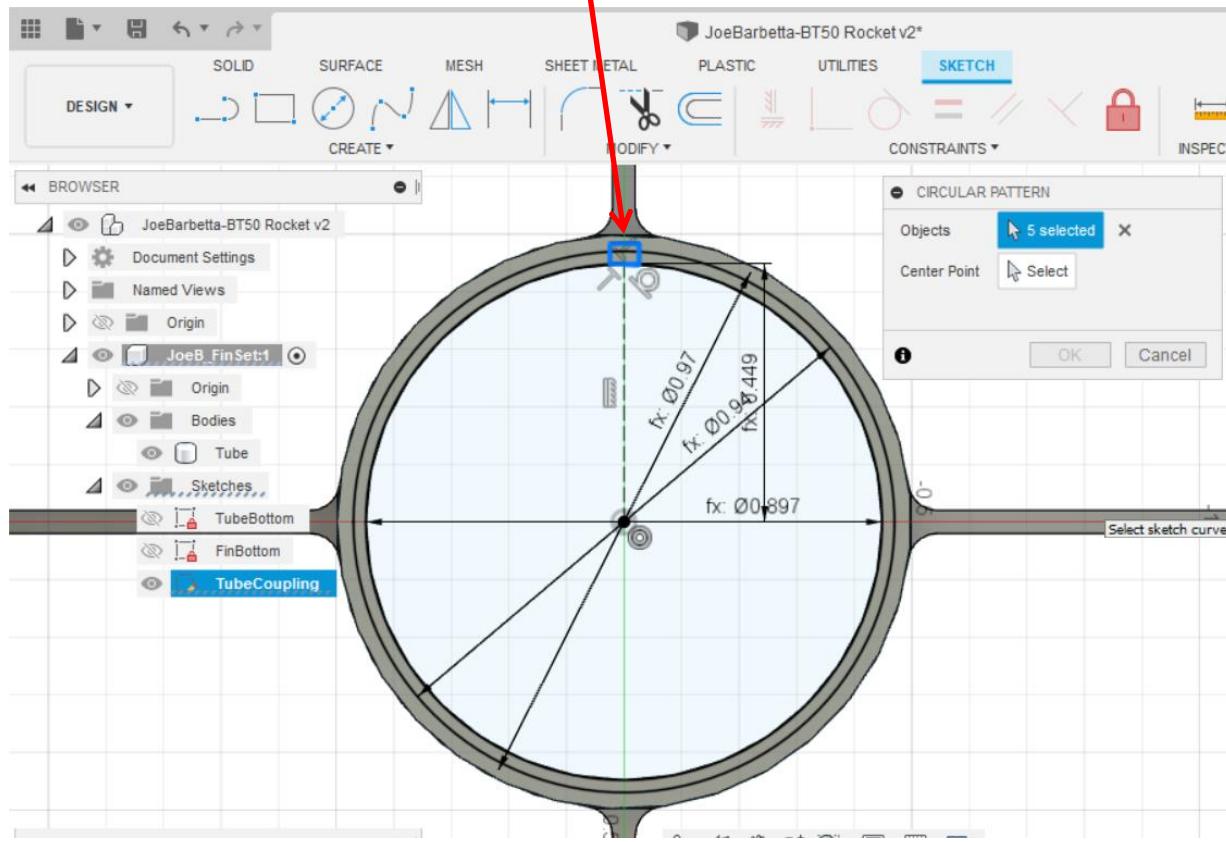

- click next to Center Point and click on the center of the circles and enter 4 in the Quantity box and click OK.

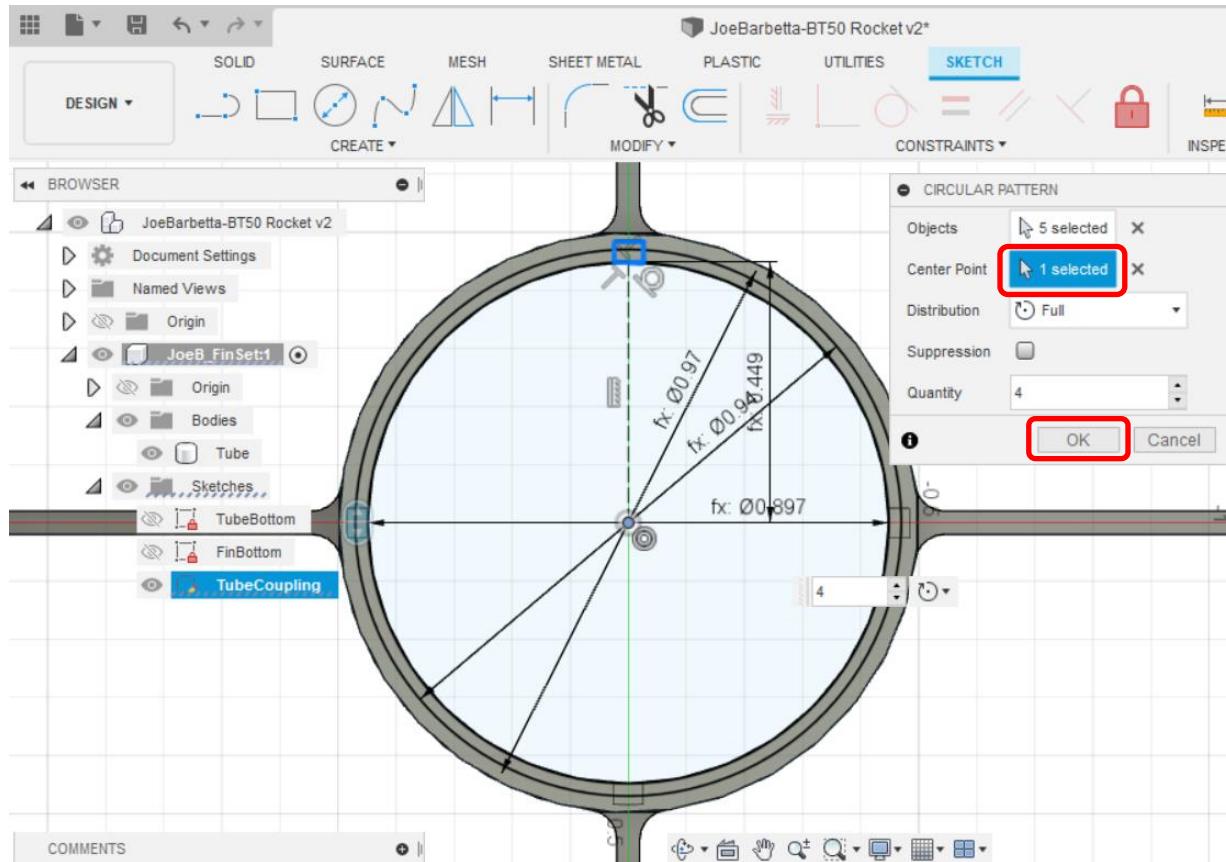


- click **Finish Sketch**.

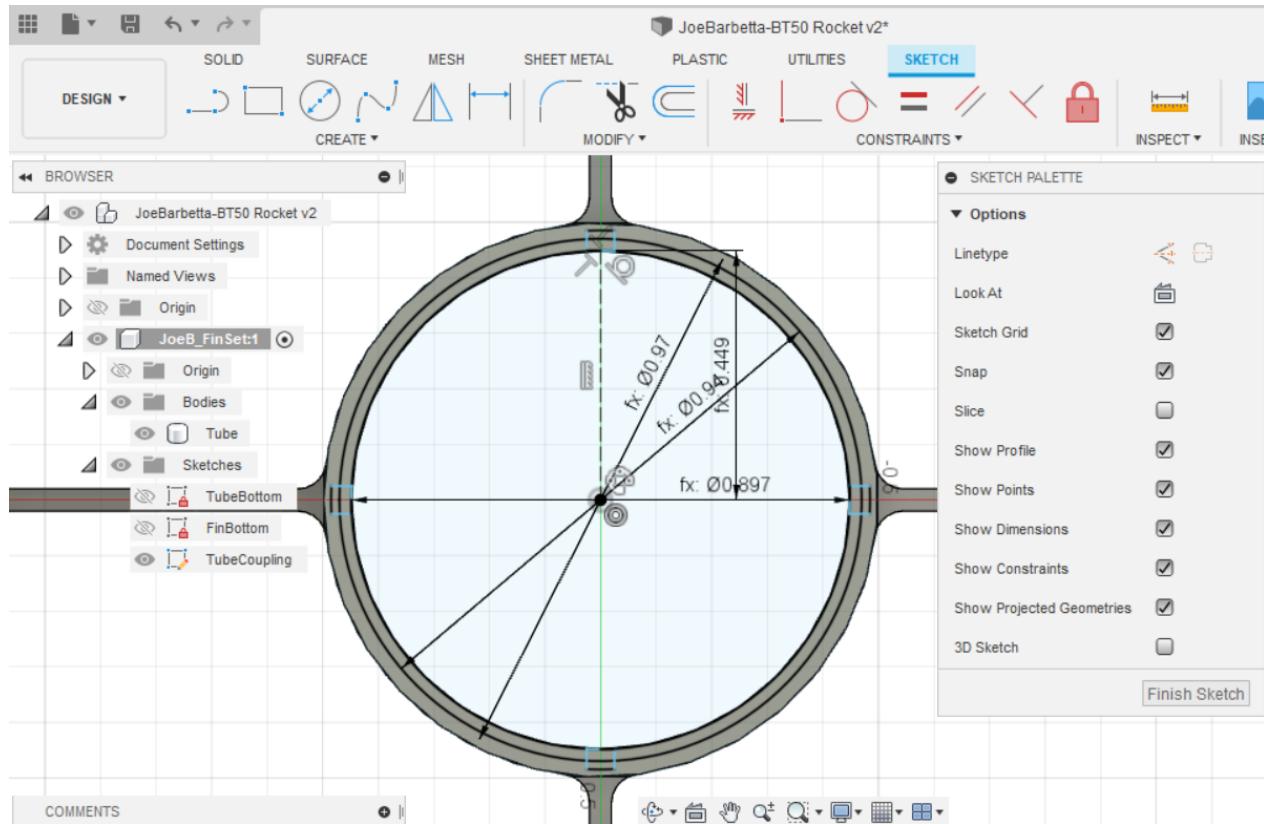

- zoom in as shown below and select the **Extrude** tool


- click on the ring and rib profiles so their interiors turn blue. As shown in the magnified view on the right, each rib has two sections. It is important Not to select the outer ring section.

- type **f** and select **Fin_TubeCouplingLength** and click **OK**.

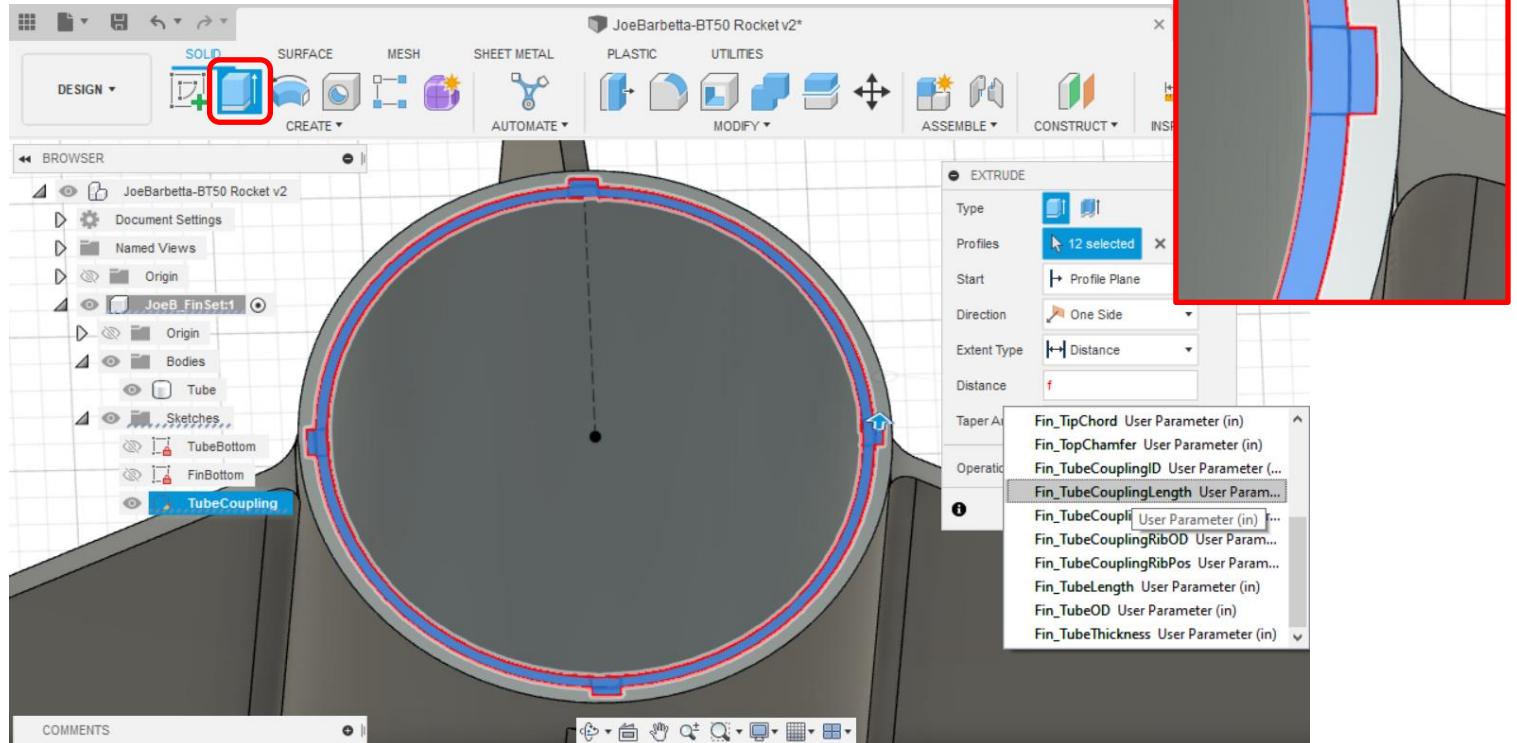


- within the **MODIFY** menu select **Chamfer** and ensure that **Type** is set to **Equal Distance**.
- click on the 4 edges between the ribs, type **0.01** and click **OK**.

If a Chamfer or Fillet operation ever causes an error, try a smaller value.

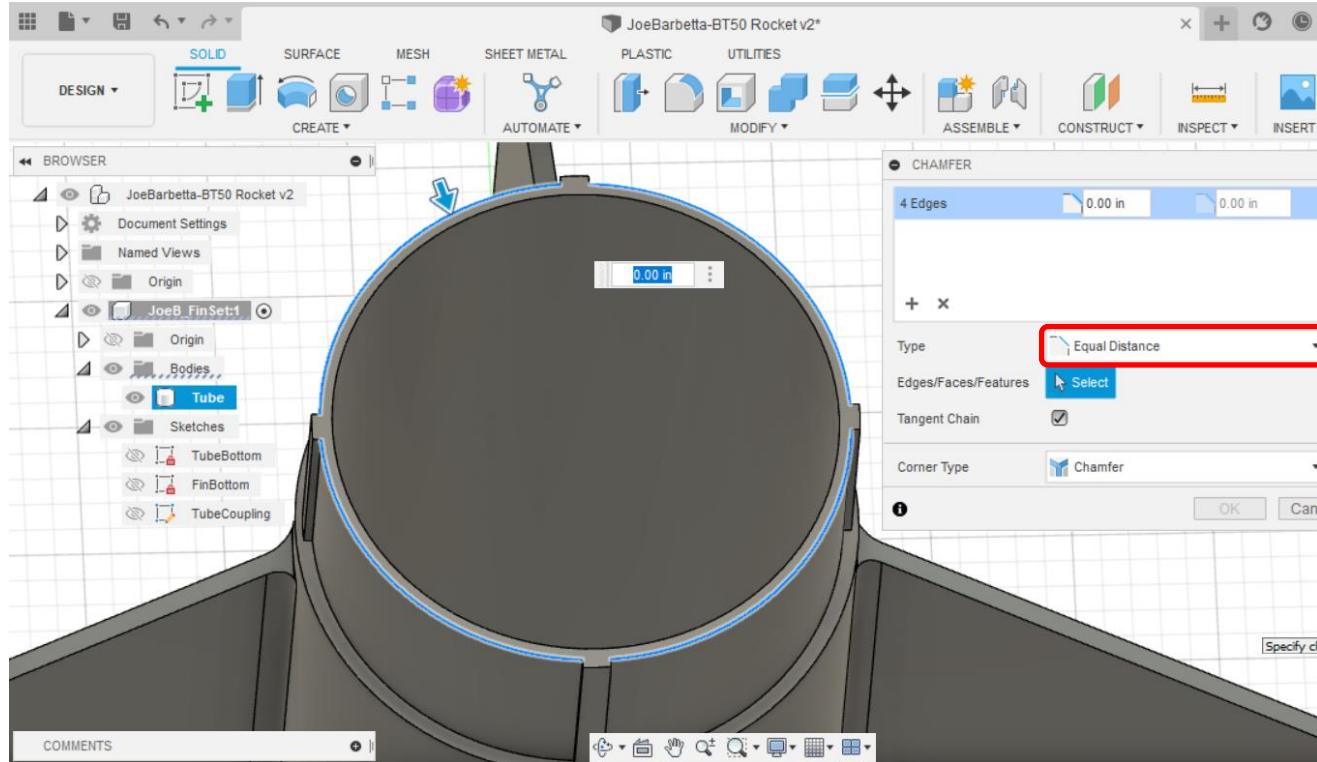


- use the **Chamfer** tool again, but this time click on the edges of the ribs and use a value of **0.015**.

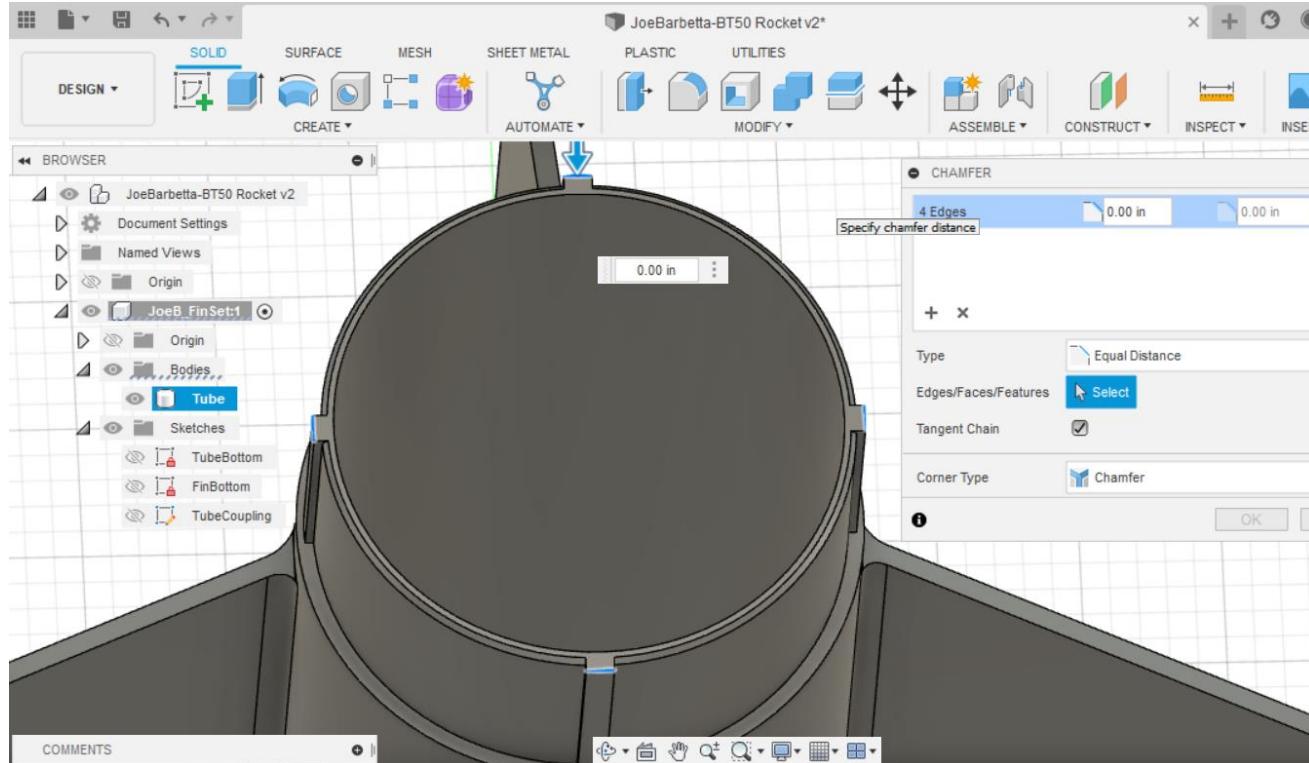

The coupling section has a thin wall thickness that should be made thicker. This is an opportunity to change a parameter.

- near the bottom of the **MODIFY** menu select **Change Parameters**. Change the **Fin_TubeCouplingOD** to **0.960**


Note that this increased the wall thickness of the coupling section.

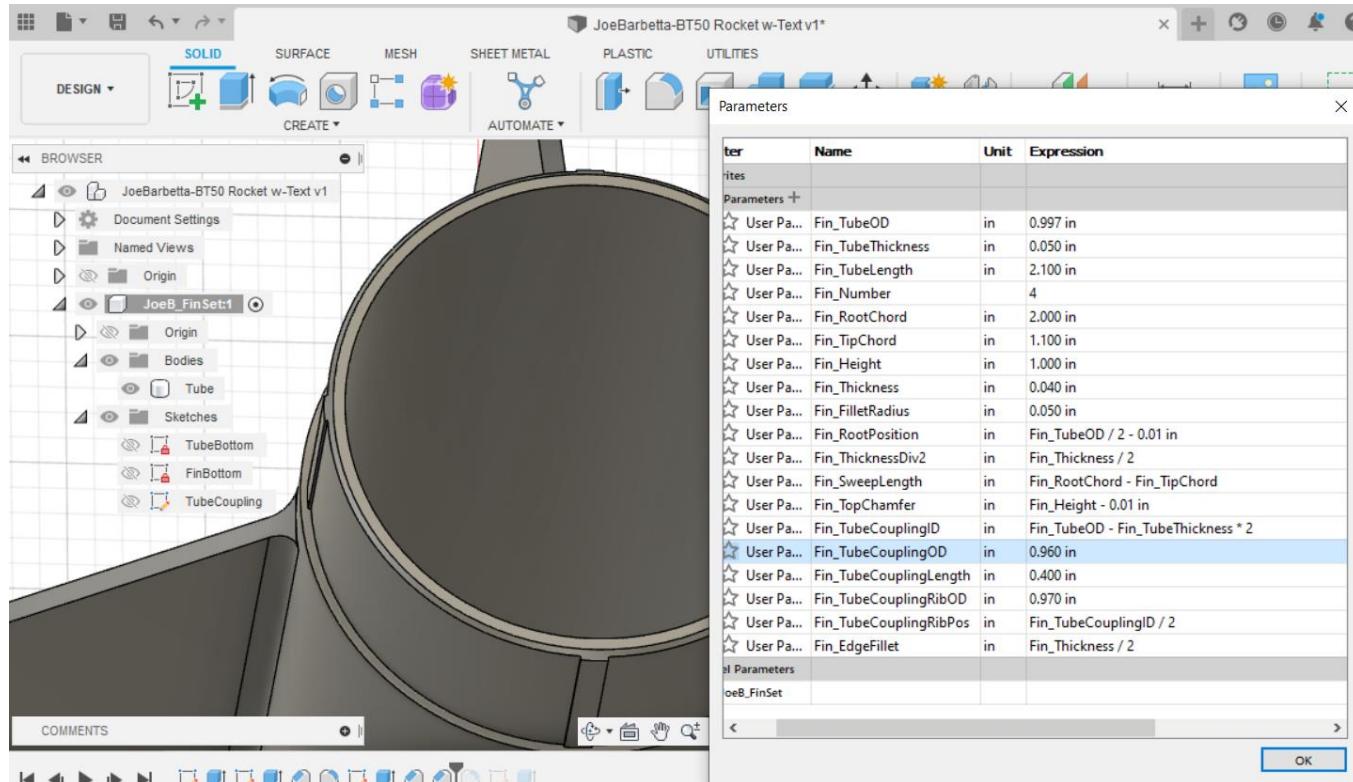


- zoom out as shown below.

- in the **MODIFY** menu select **Fillet** and click on the two top edges of each fin

- type **f** and select **Fin_EdgeFillet** and click **OK**

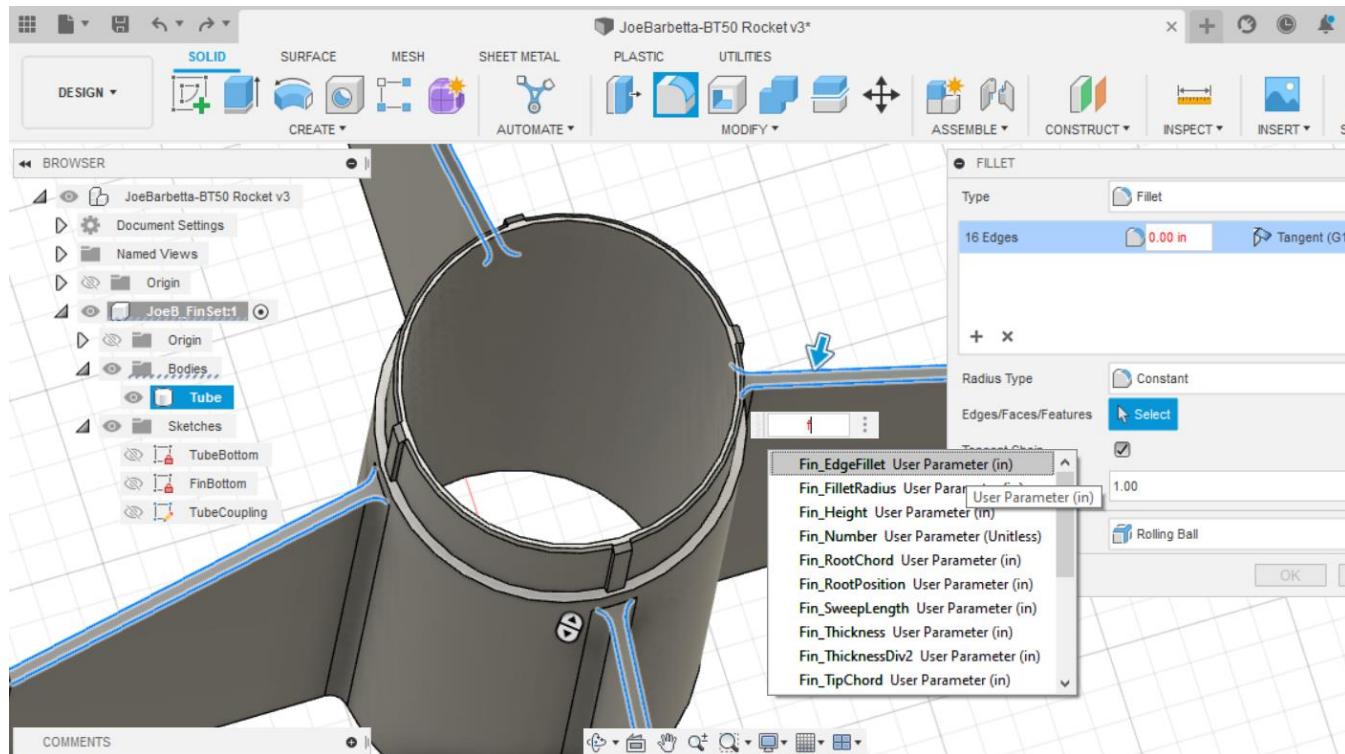


This is our finished fin set with the Parameters window open. Next, we will add text.

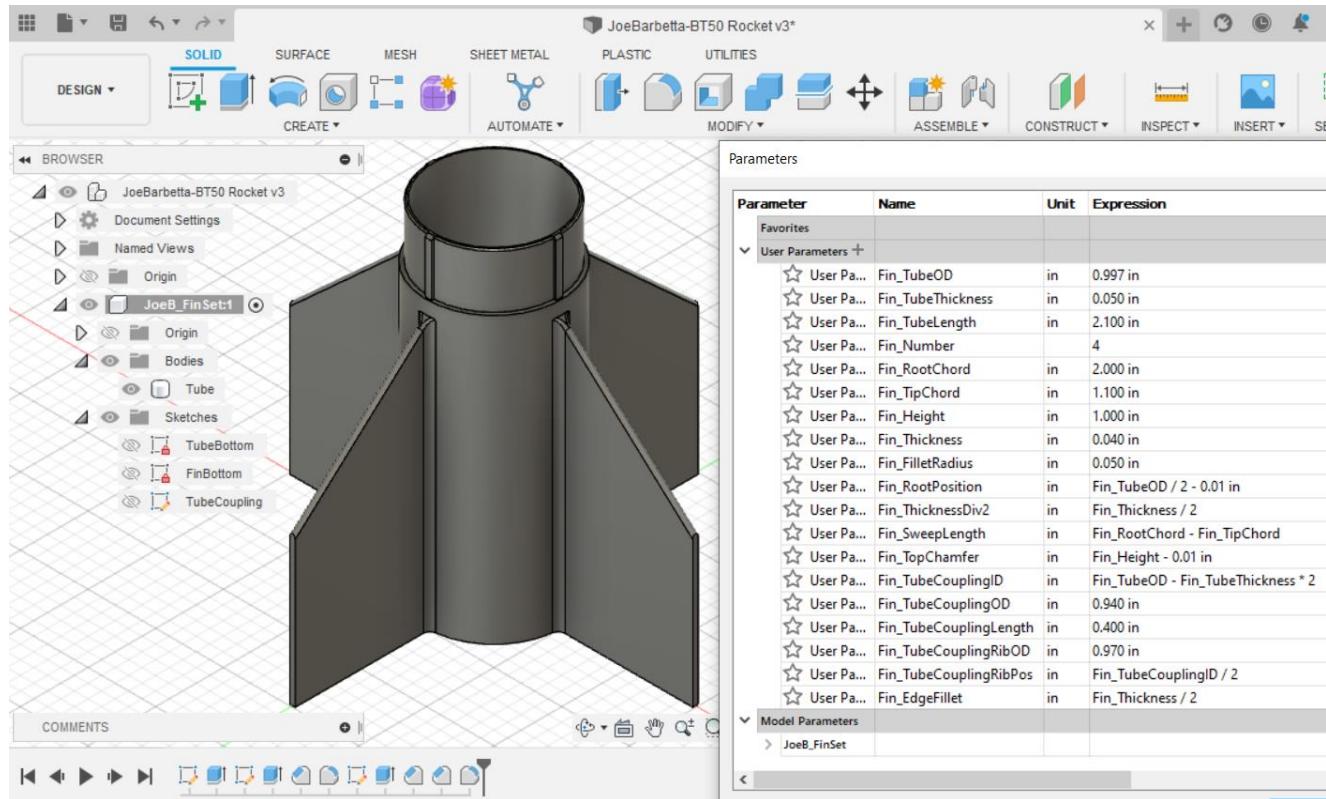


Adding Text to a Flat Surface

It's a good idea to add text to your rockets to easily identify their specifications. For example, to indicate if the warhead is conventional or nuclear and its yield in pounds or kilotons.


- select **Create Sketch** and click on the fin surface, which should turn light gray

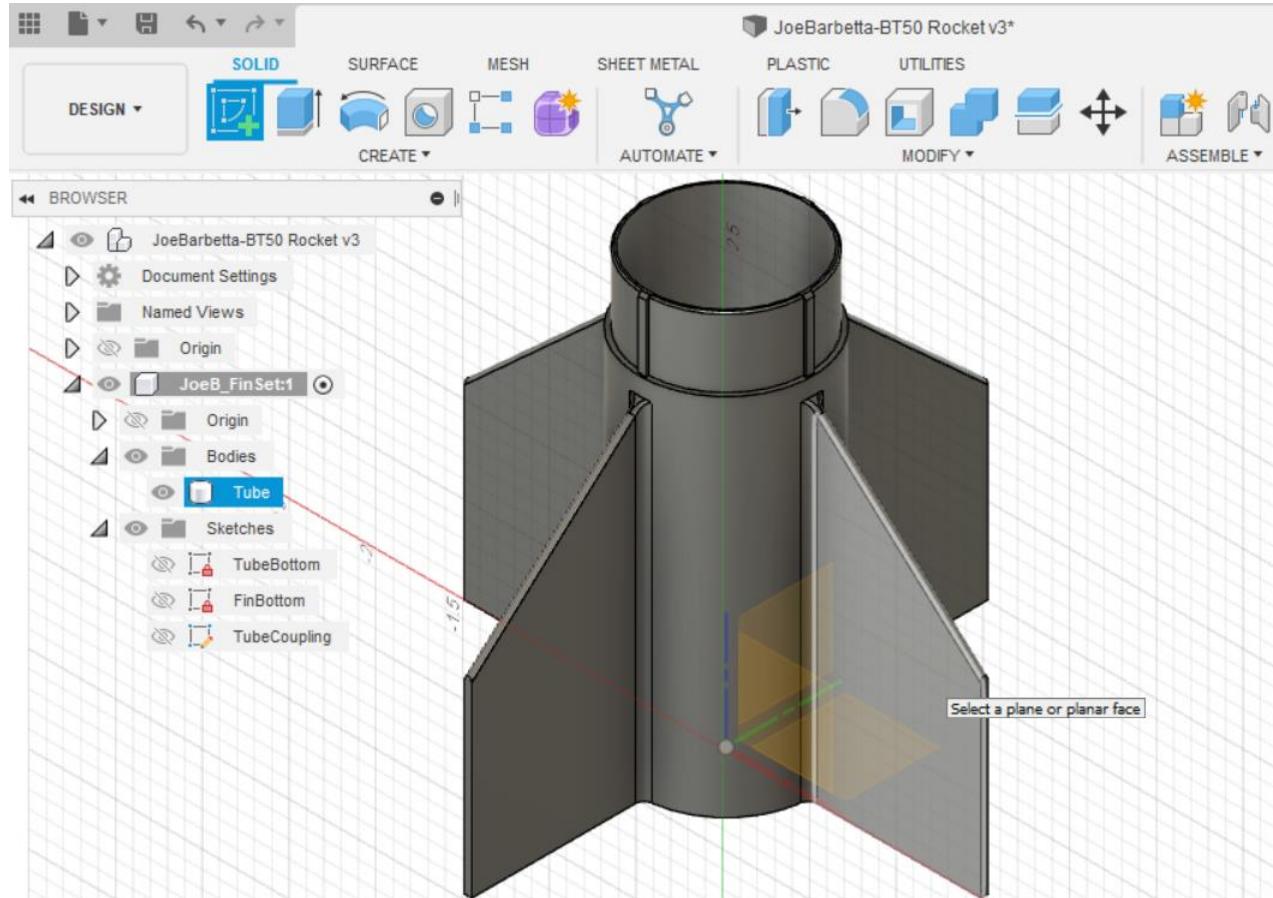


- zoom in to the fin. When hovering over the View Cube two curved arrows will show. Clicking on one will rotate the view.
- in the **CREATE** menu select **Text** and start defining a text region rectangle by clicking where the top left corner should be.

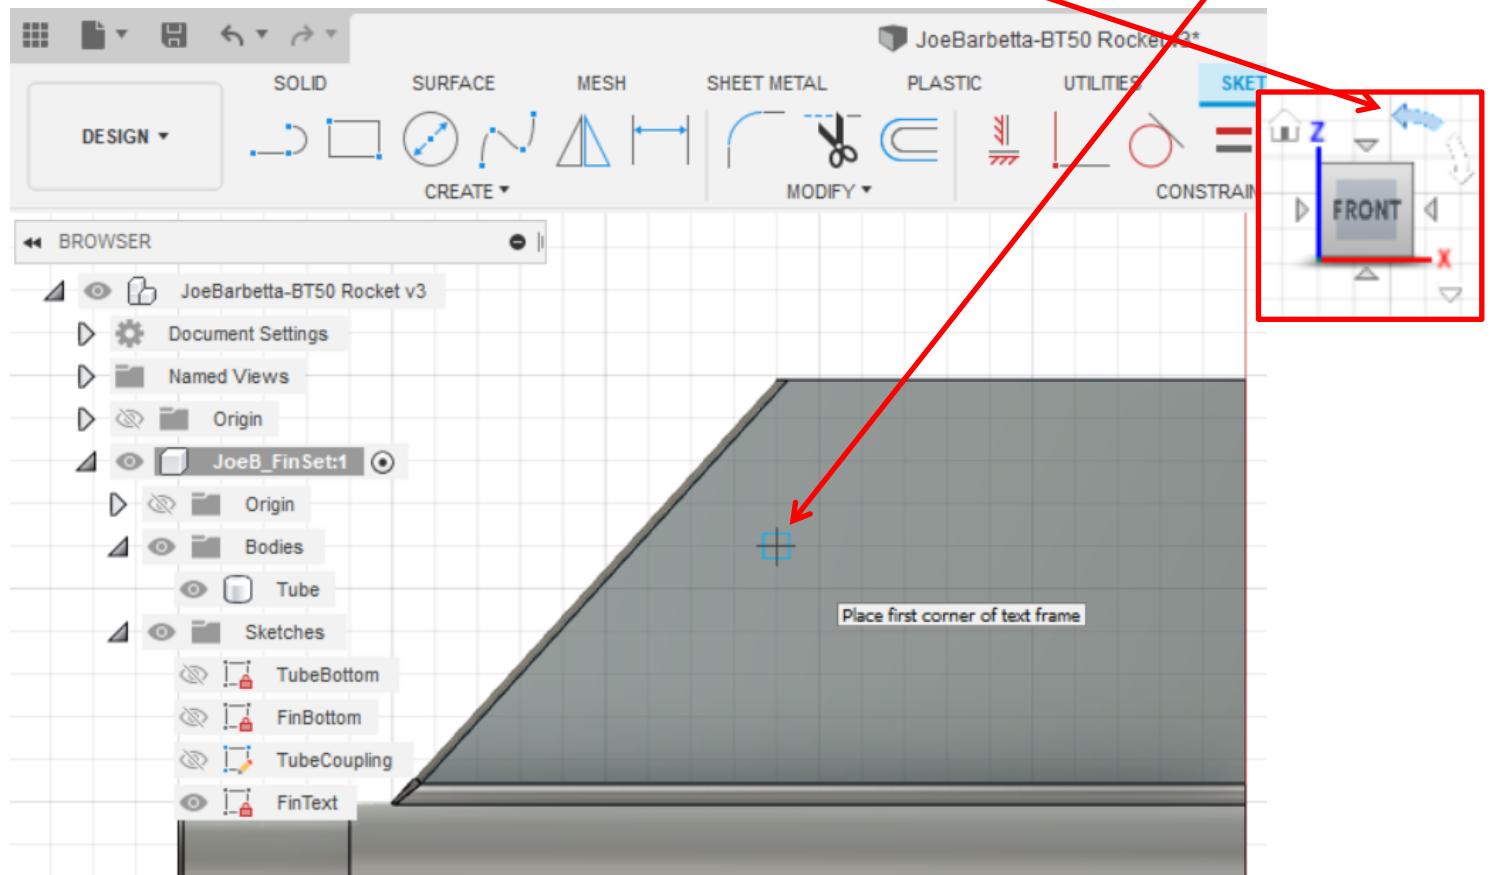


- click where the bottom right corner should be.

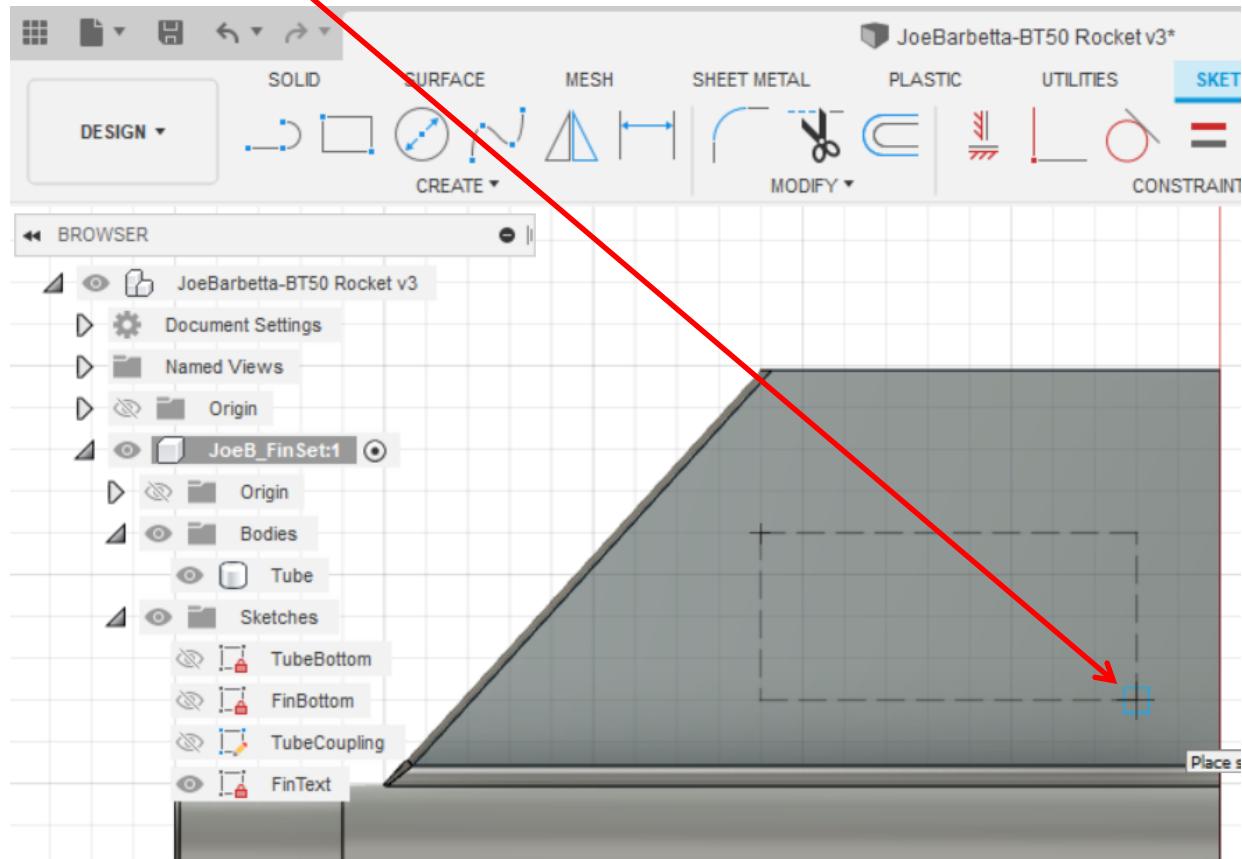


- enter the desired text in **Text**. If the text is too large or too small change the **Height** until the desired size is attained.
- one can also change the **Font** and make the **Typeface bold or italic**
- one can also click on **Alignment** options to center the text horizontally and vertically
- the text can also be mirrored by using a **Flip** option
- click on **OK** and then **Finish Sketch**

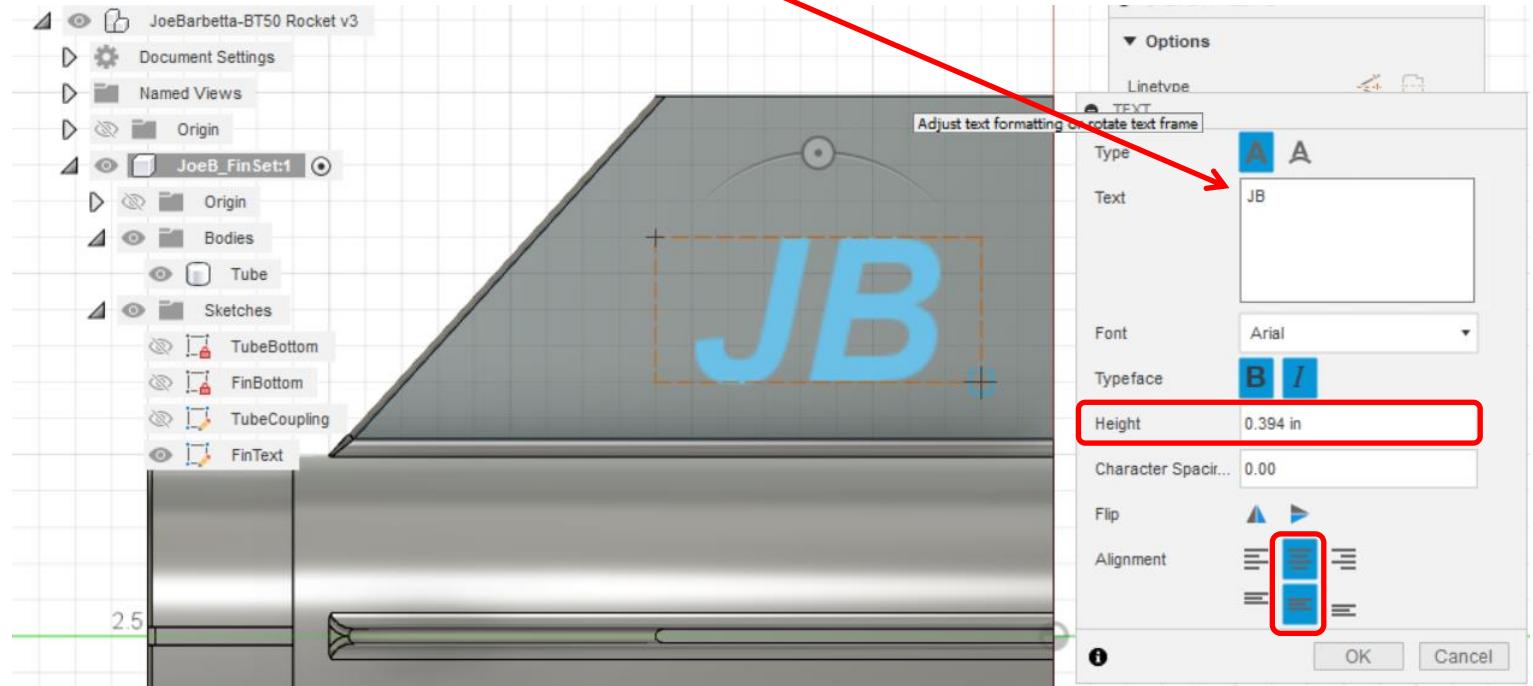


- right-click on the text and select **Create Selection Set**

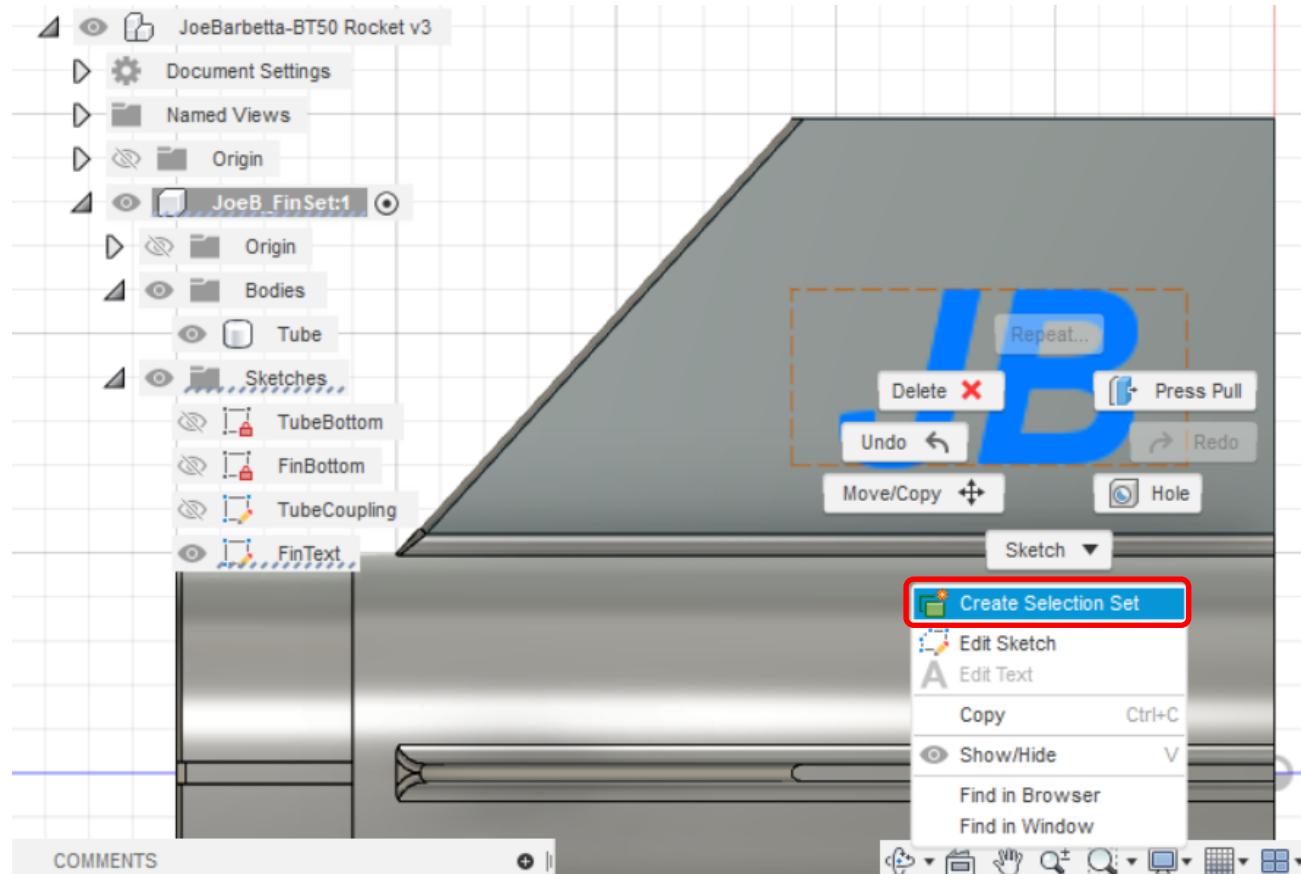


- select the **Extrude** tool, type **0.02**, and click **OK**

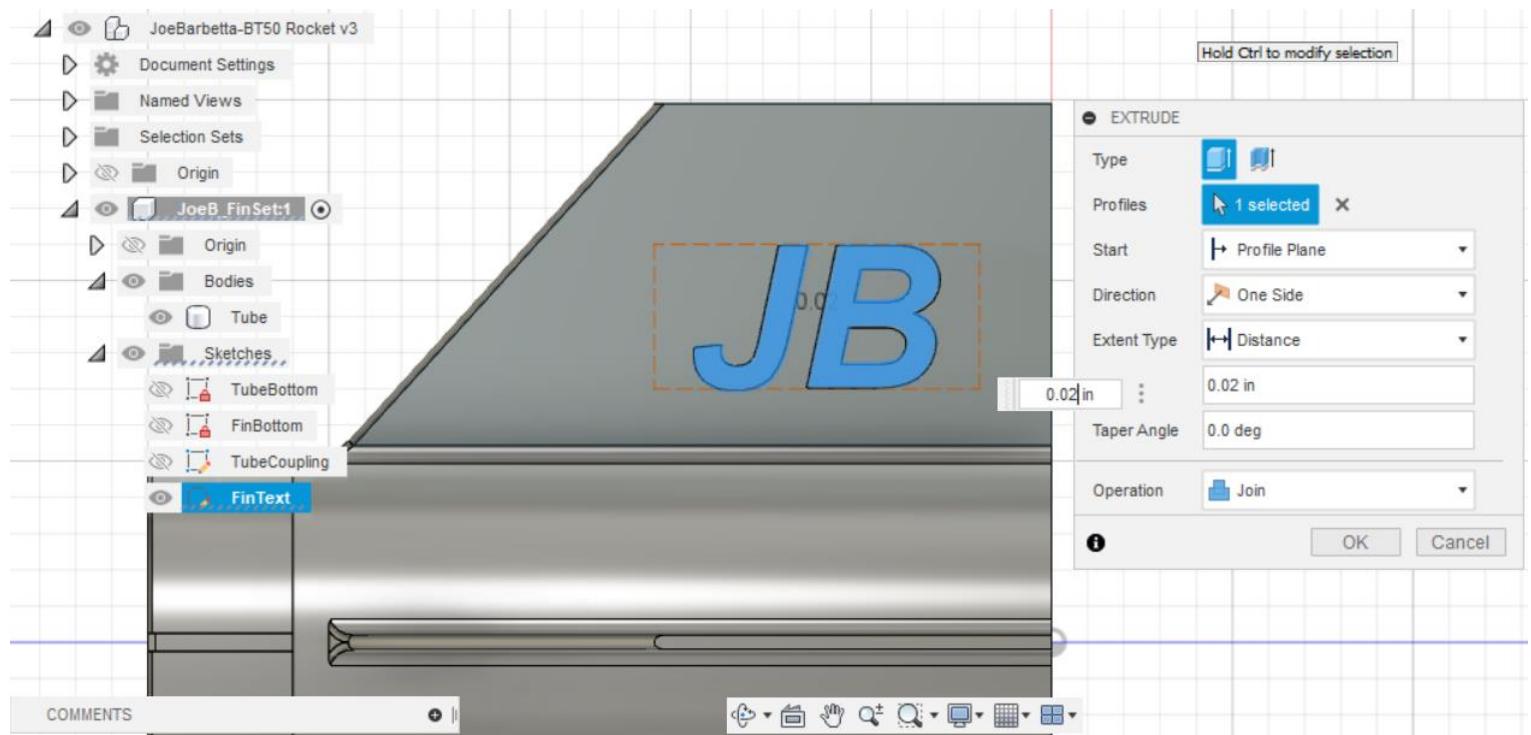

Rotating the view should show that the text is extruded.

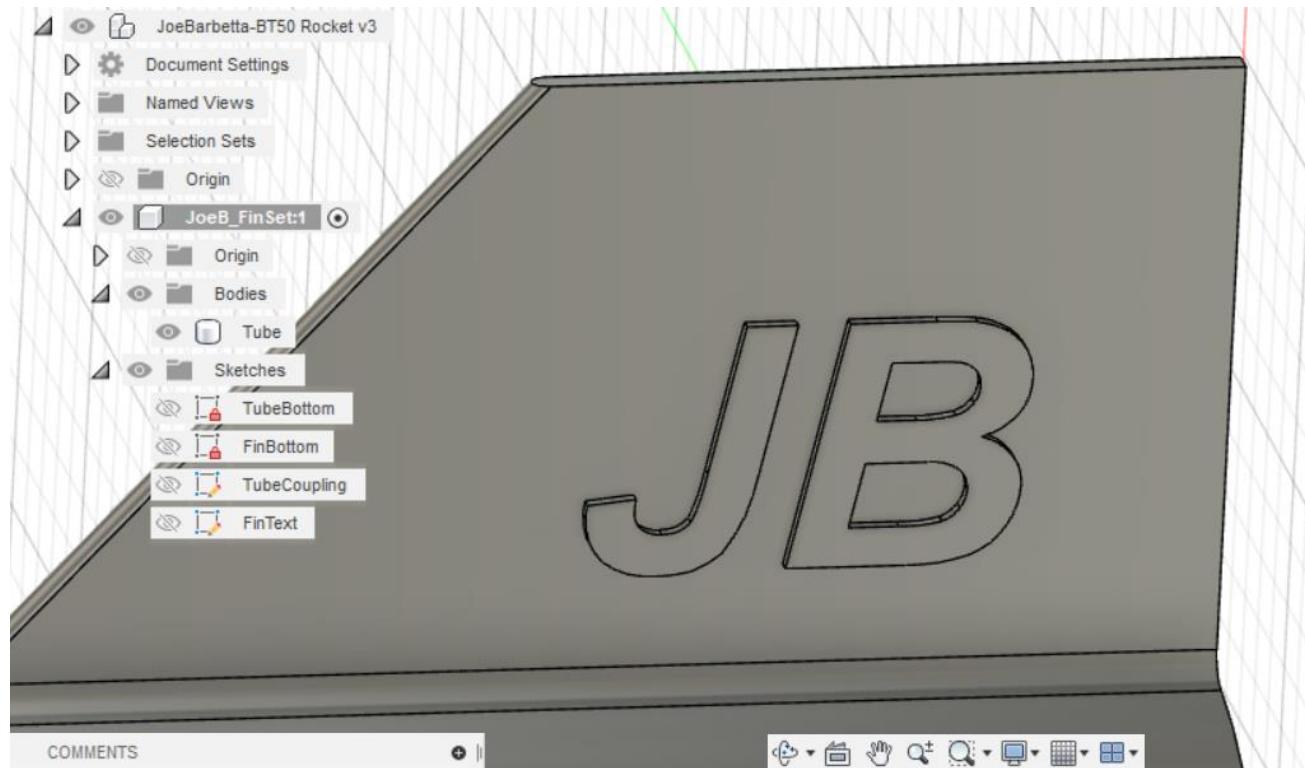


Here is your finished Fin Set.

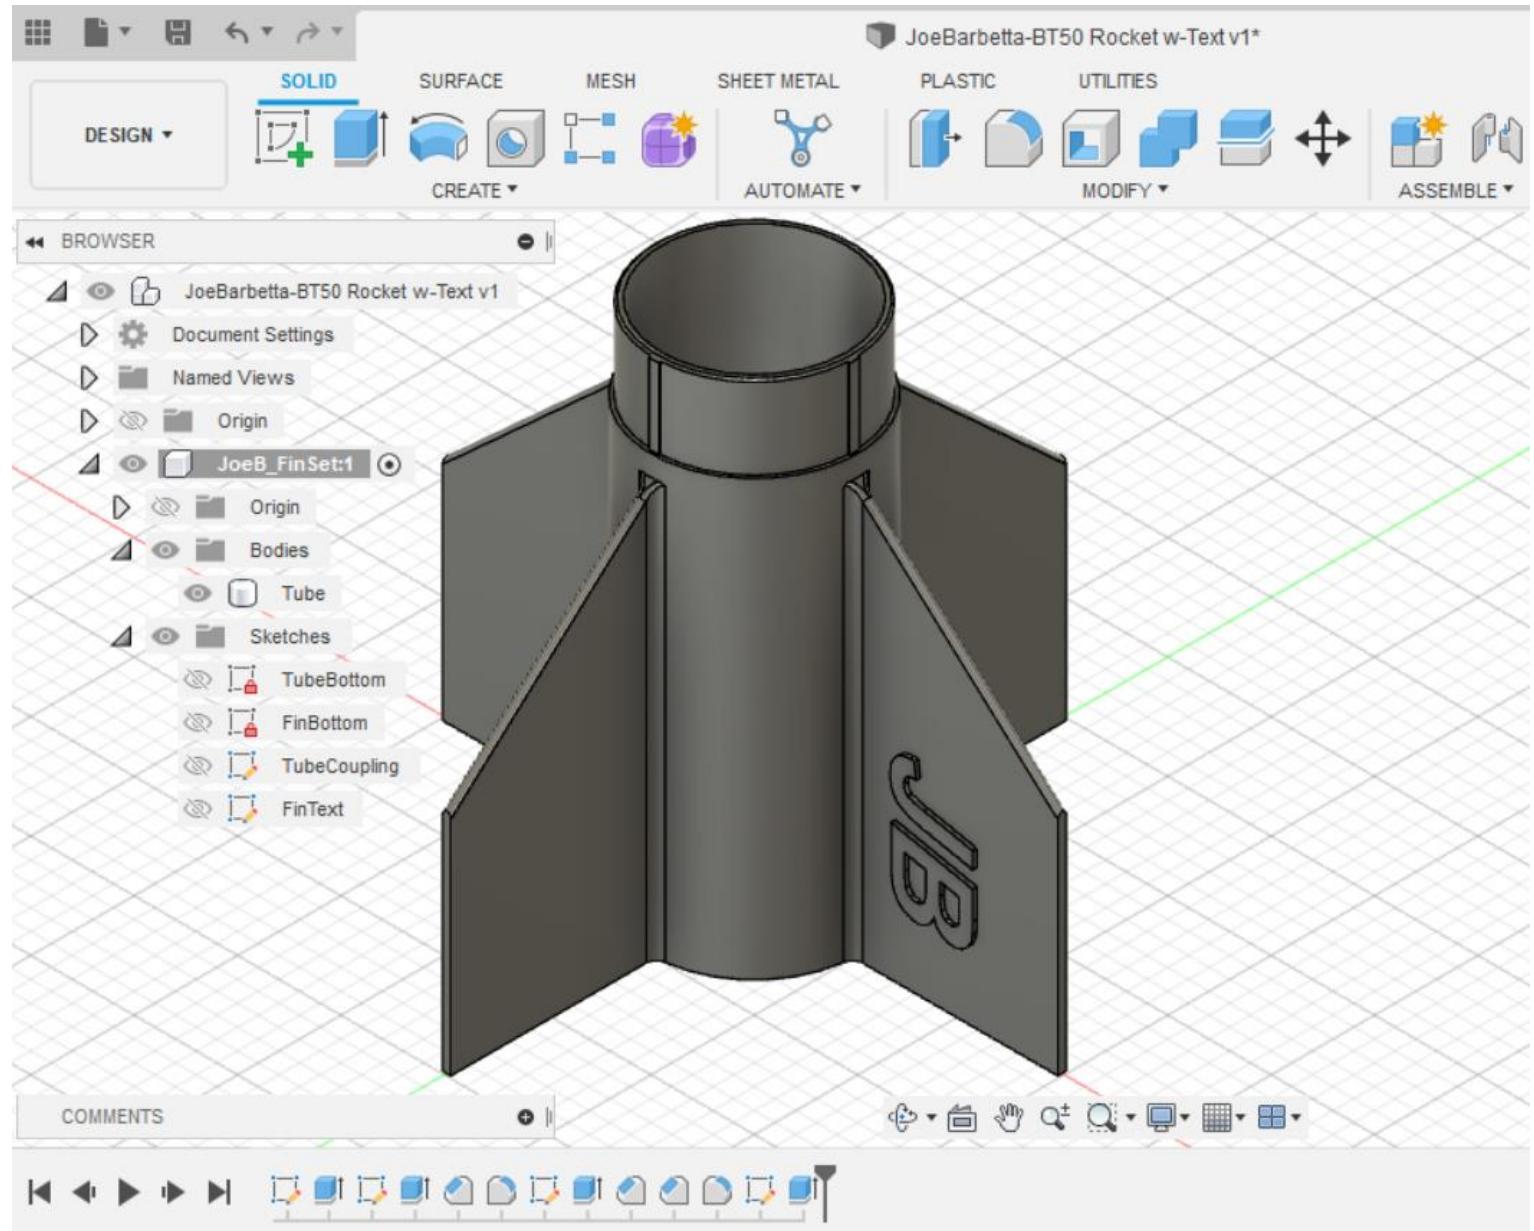


Setting Materials and Colors


- right-click on the *Component name* and select **Physical Material**

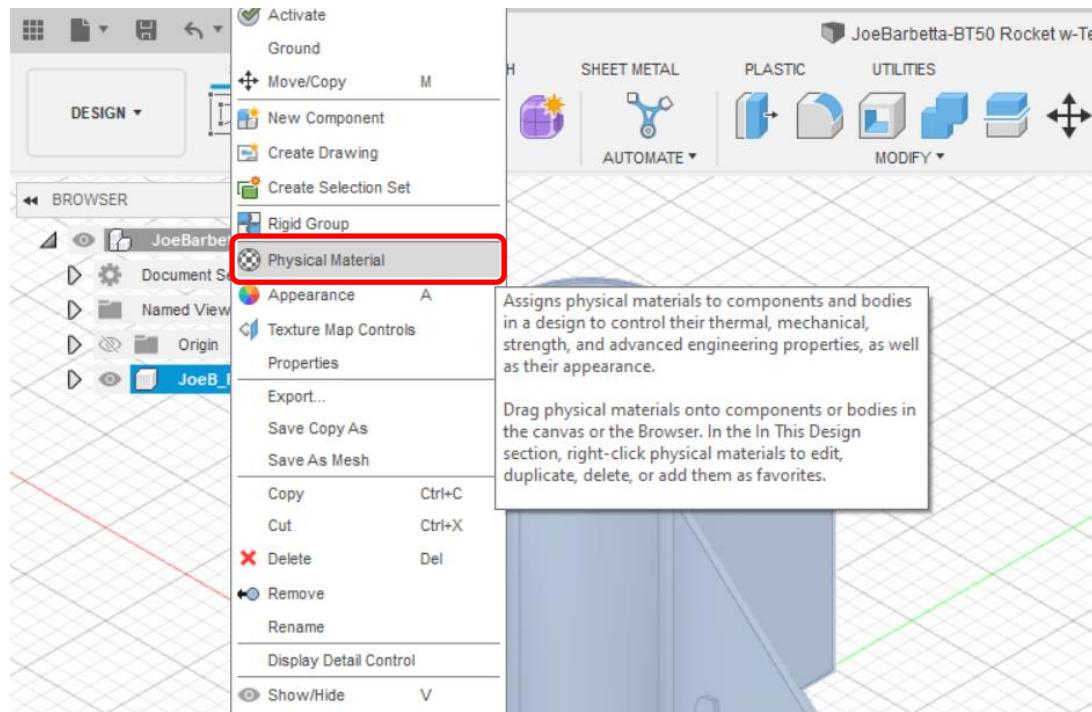


- in the **Library** section open the **Plastic** folder. You may have to scroll to find it.
- click on the **ABS Plastic** icon and **drag it** onto the Fin set. The Fin Set should turn white.

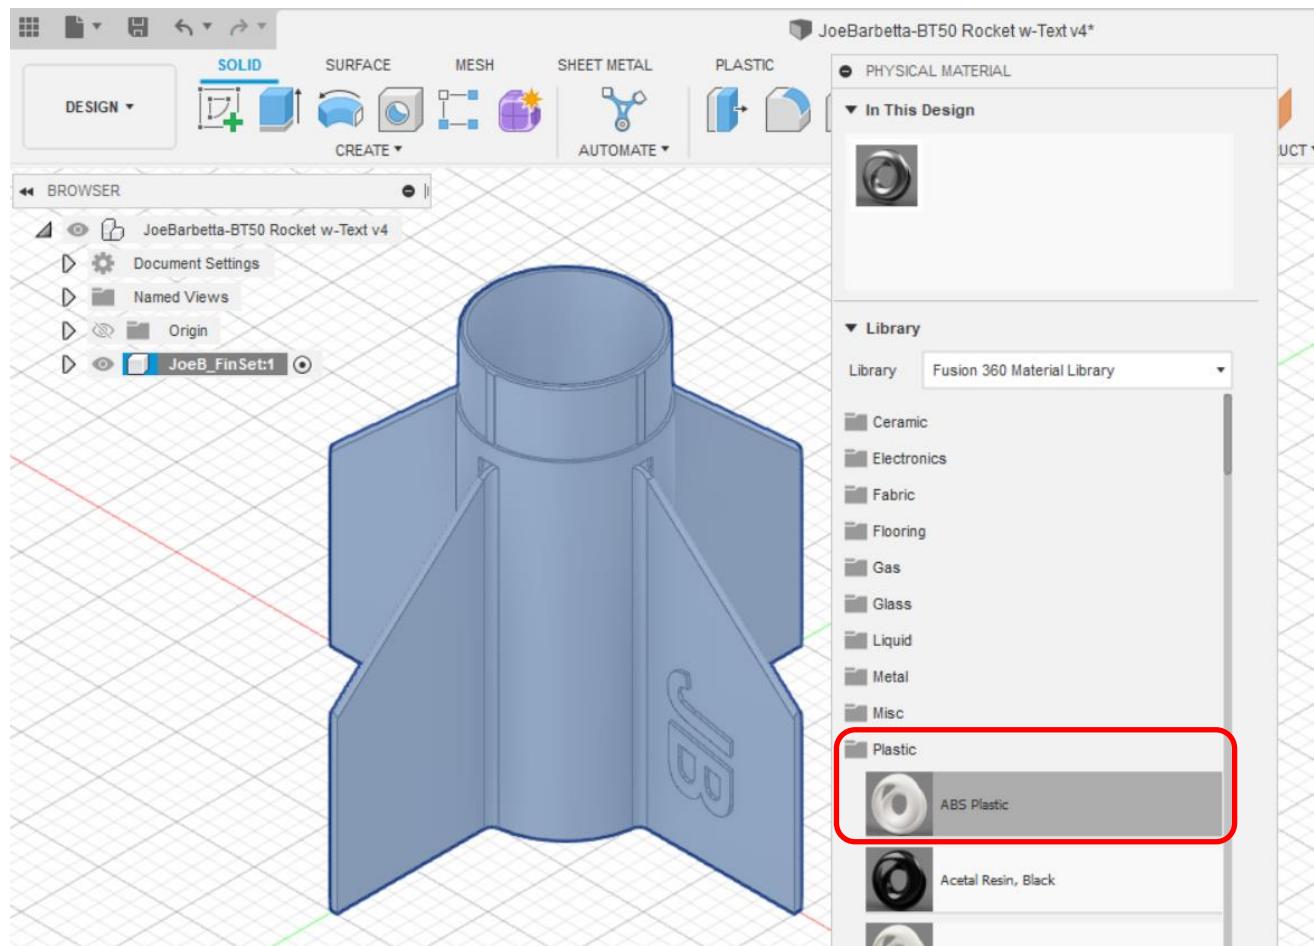

- right-click on the new white icon that appeared in the top “In This Design” section and select **Edit**
- click **Advanced..** button in the pop-up window

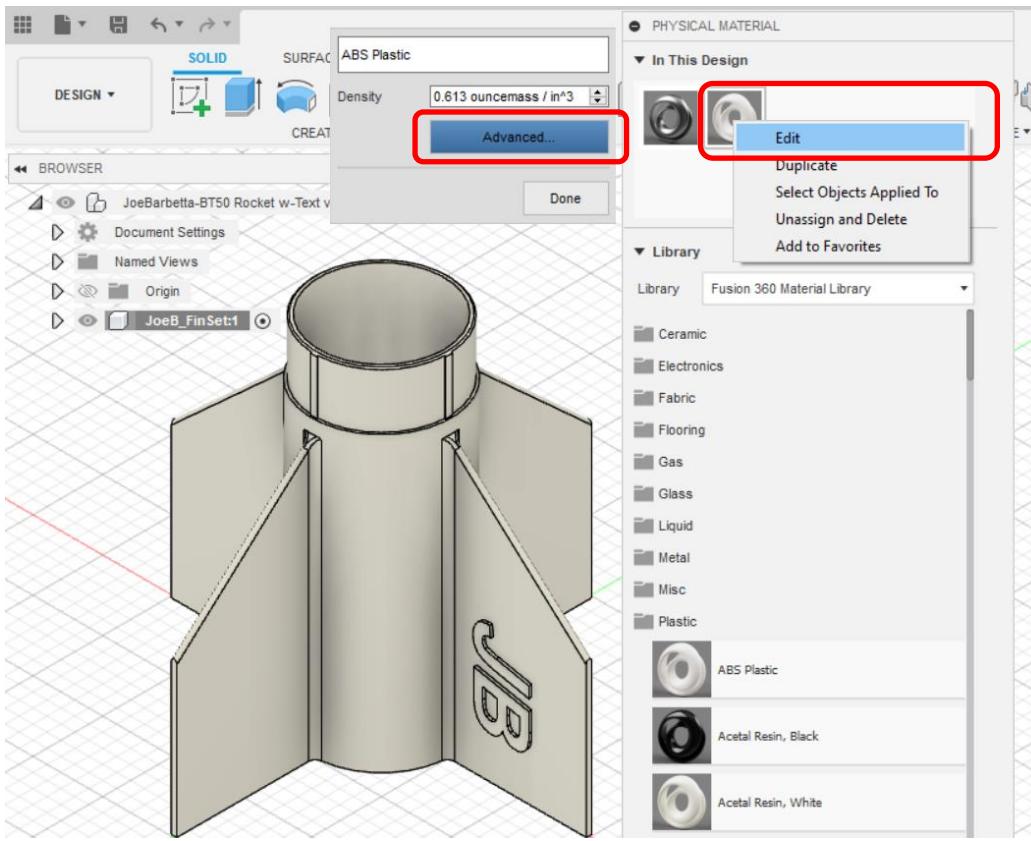


- select top **Appearance** tab
- in the **Parameters** section click on the small down arrow all the way to the right of **Color** and select **Edit Color...**
- select from the **Basic colors** on the left or **color selector** on the right and click **OK**
- click **OK** on the *Material Editor* window and click **Close** on the *PHYSICAL MATERIAL* window

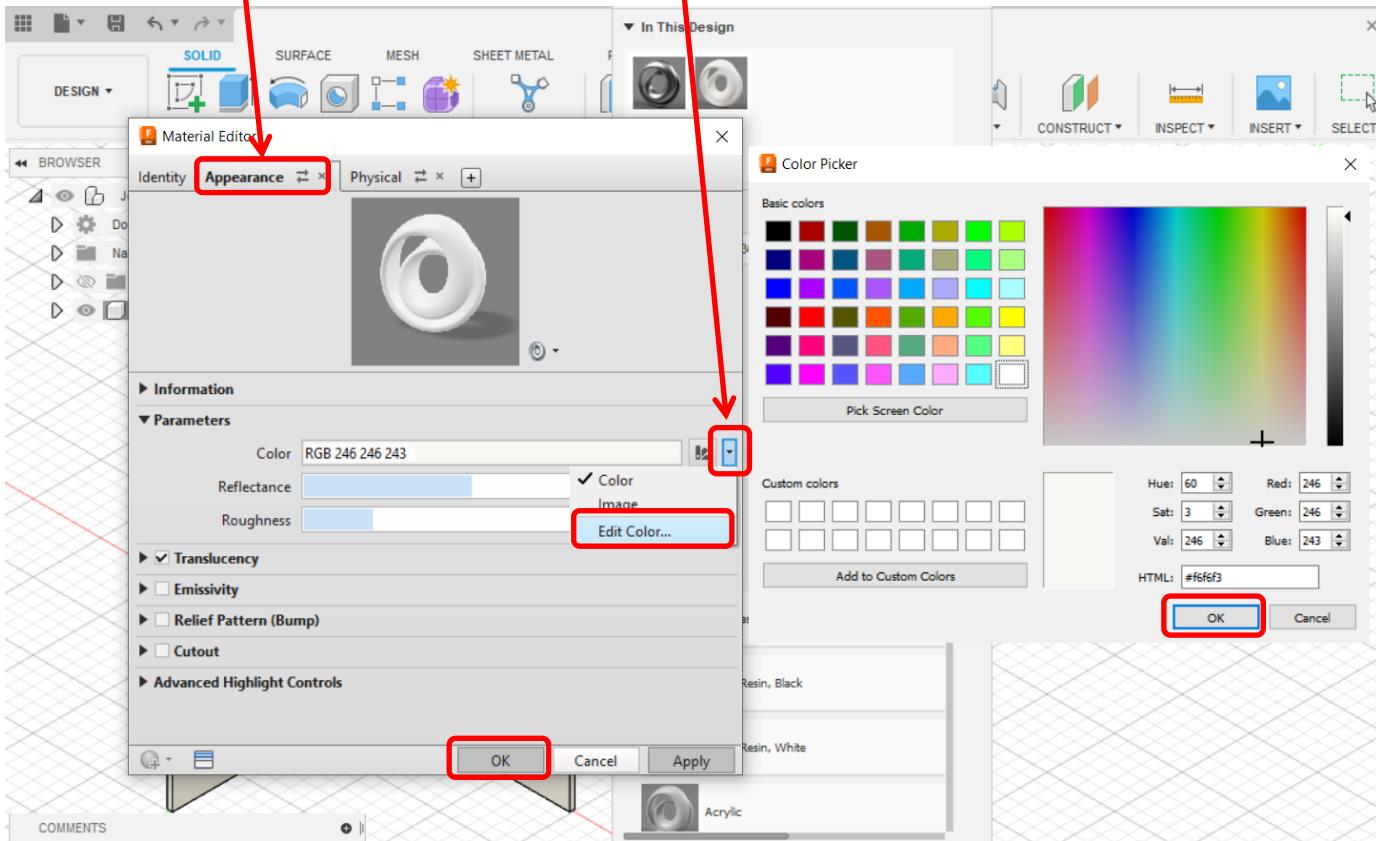

If there are components in a project, wherein different colors are desired, the white ABS plastic icon in the Plastic folder can be used again and then the new white icon in the top section can be edited to a different color.

It should be noted that the **color of 3D Printed components** is determined by the filament loaded into the printer.

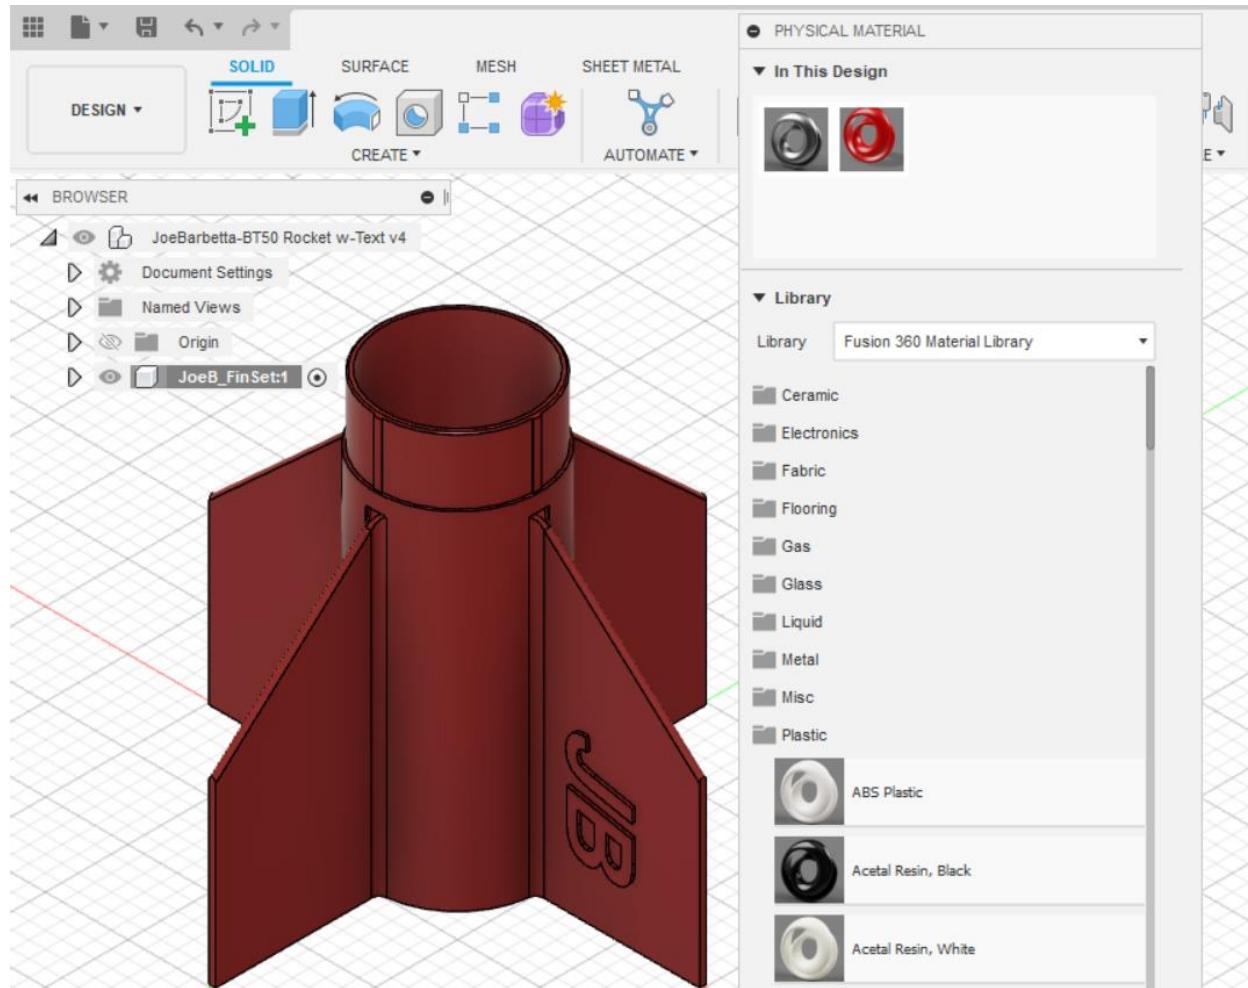


Creating a Test Print

It's a good idea to first print "test sections" of a design for features with critical dimensions. For example, the coupling section with ribs must fit securely in the body tube. Printing the entire component and then finding a problem results in the wasted time and material. One can often cut away large sections of the component resulting in a small test print.


It is a good idea to save your project now. Then cut away sections to leave the "test section" and then close the file without saving. The project can then be reopened.

- here is the "test print" section to check the fit in the body tube.

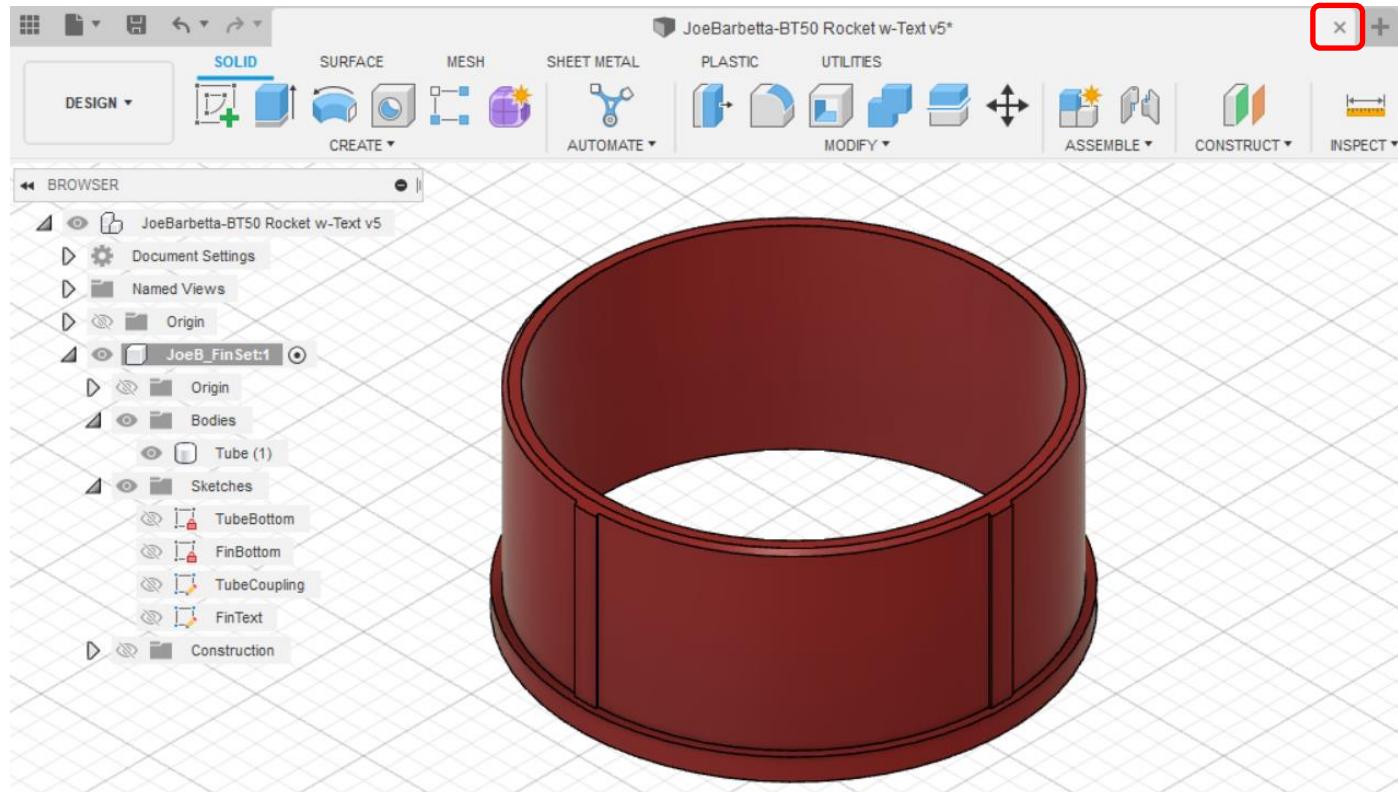


Using a Construction Plane

- within the **CONSTRUCT** menu select **Offset Plane** and click on the region at the bottom of the coupling section.

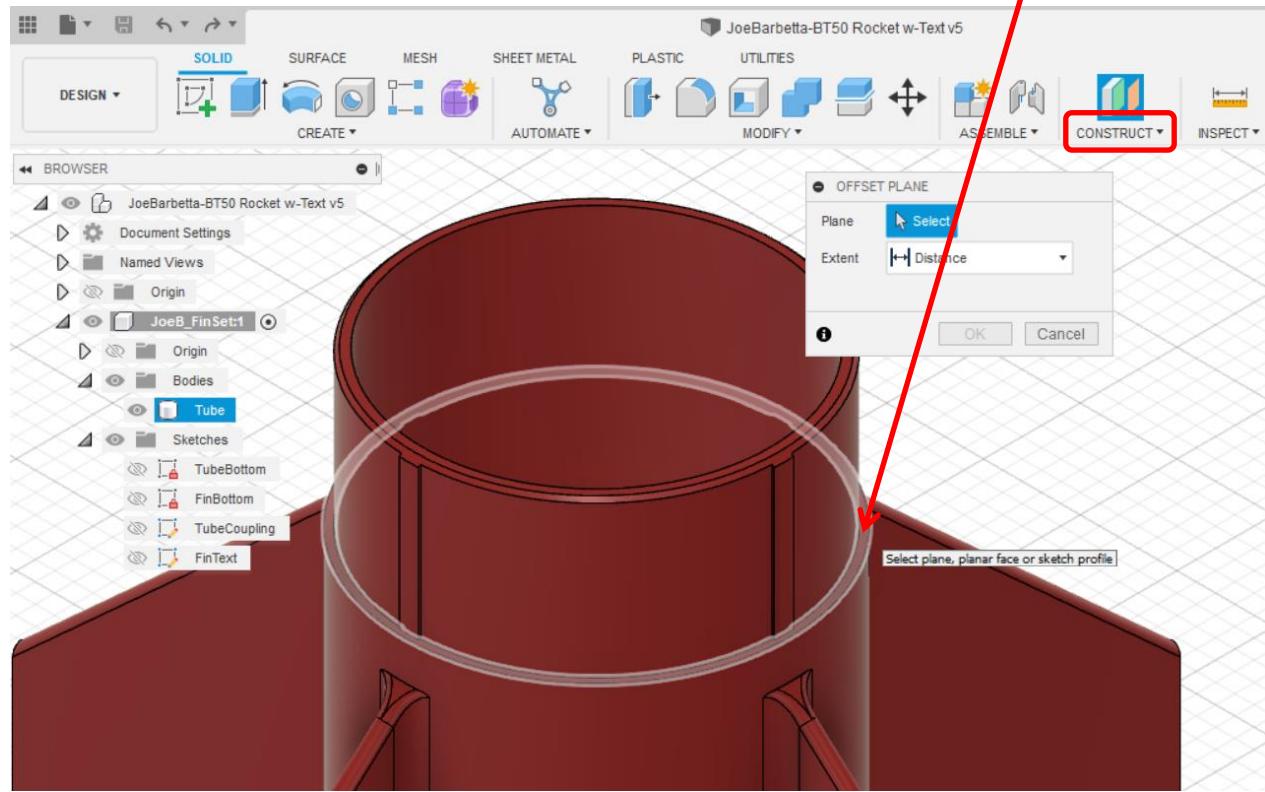


- enter **-0.05** (insure you enter the negative value) for **Distance**, which will shift the plane down slightly.

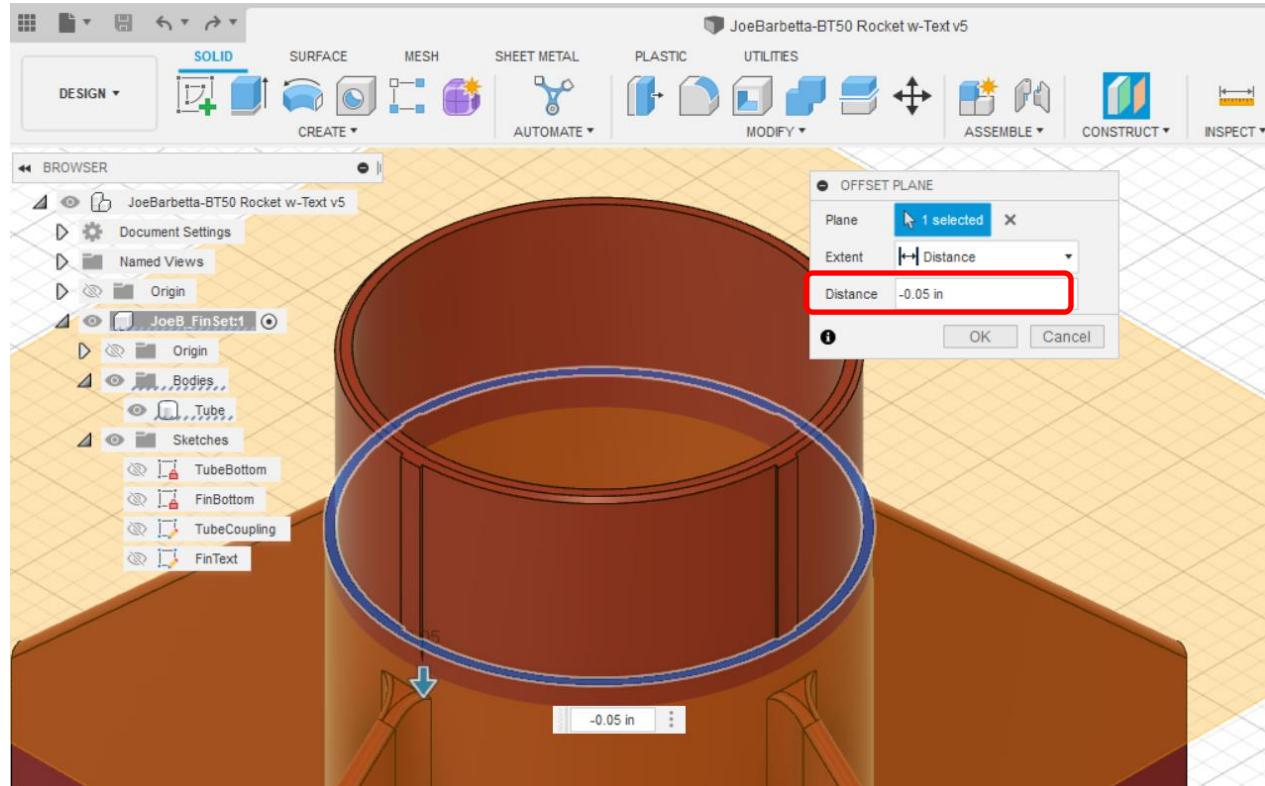


Using the Split Body tube

- select the **Split Body** tool, then click on the FinSet Component.
- click on **Select** to the right of **Splitting Tool(s)** and then click on the yellow Plane.

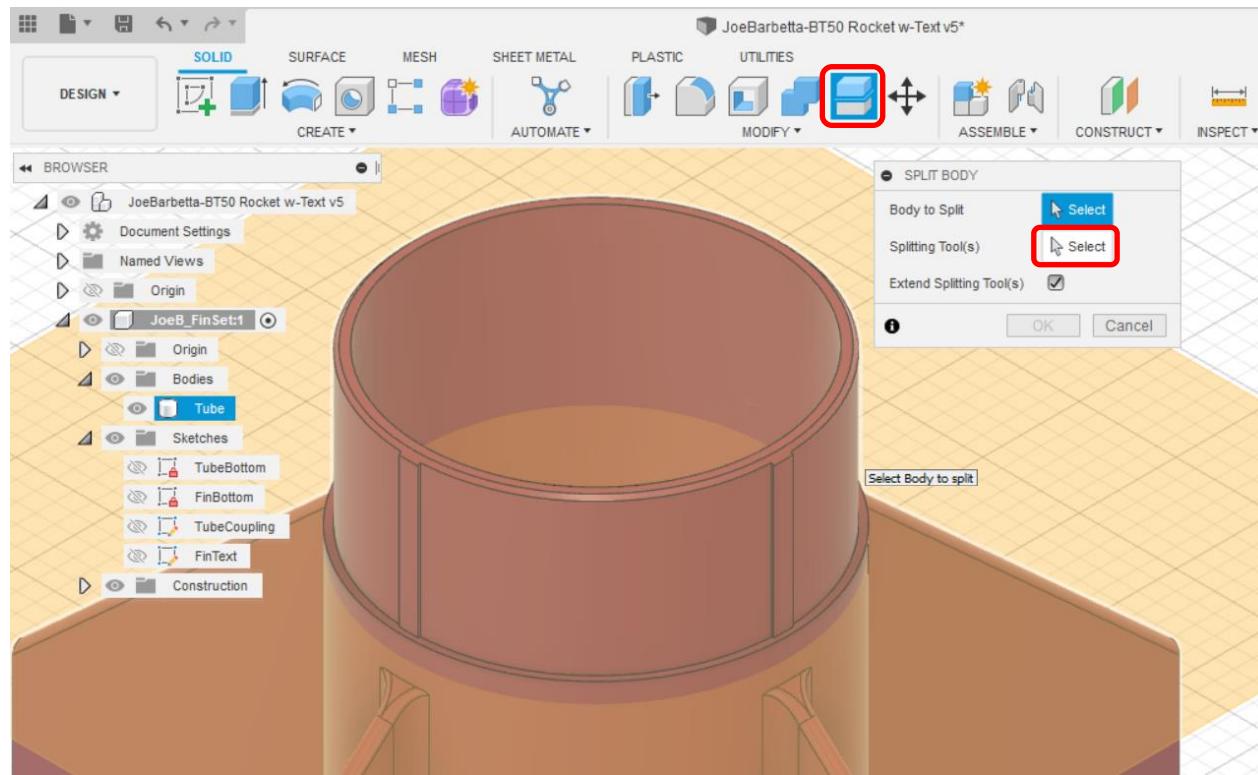


Note that now there is a now a new Body. When the mouse point hovers over each body, the corresponding body should lighten.

- right-click on the original "Tube" body and select **Remove**. This should delete the fin section. If the wrong body is deleted, click on **Undo** and then remove the other body. If you don't see the Bodies, use the **arrows** to open these categories.

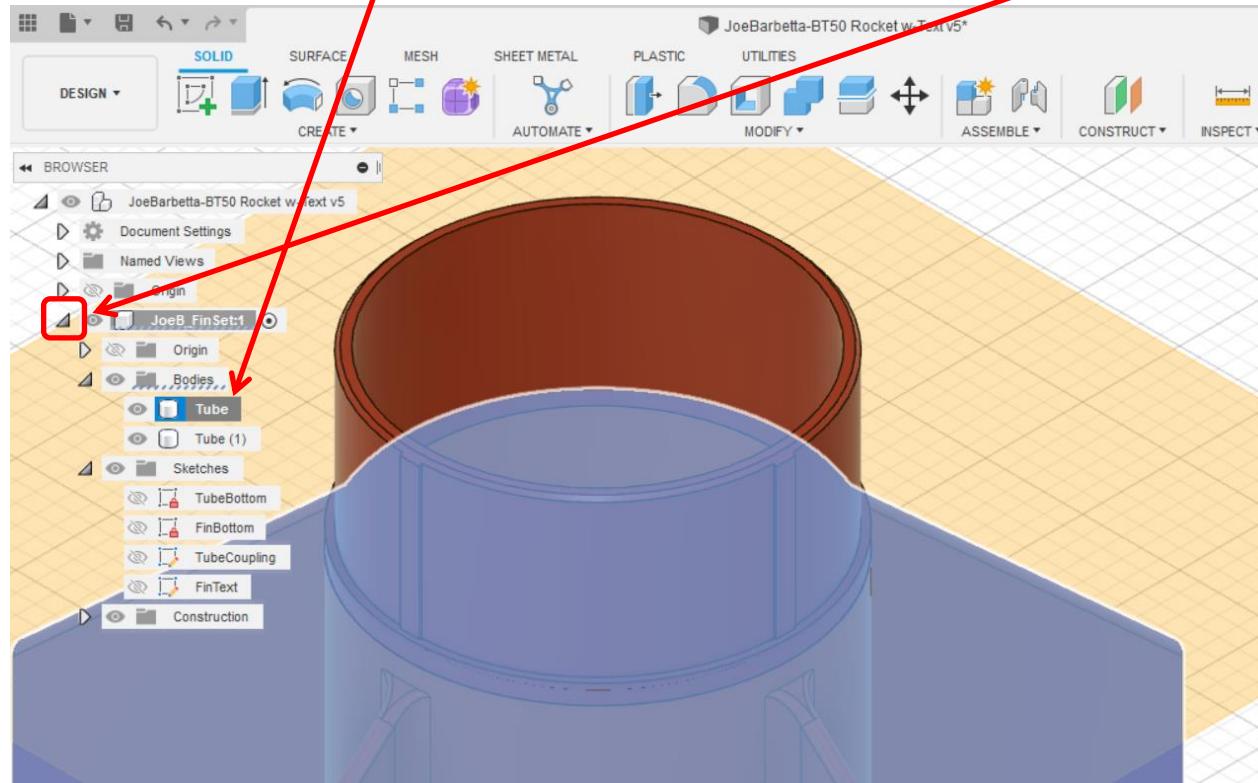

Exporting a STL file for printing

- right-click on the Component name and select **Save as Mesh**, which is about halfway down the menu list.
- insure **Format** is **STL (Binary)**, **Unit Type** is **Millimeter**, and **Refinement** is **High**. Click **OK**.
- the **Save STL** window will show a file name matching the Component name. Add **Test** to the file name so it will be identified as a test print. **Note the save location of the file, which can be changed if desired.**

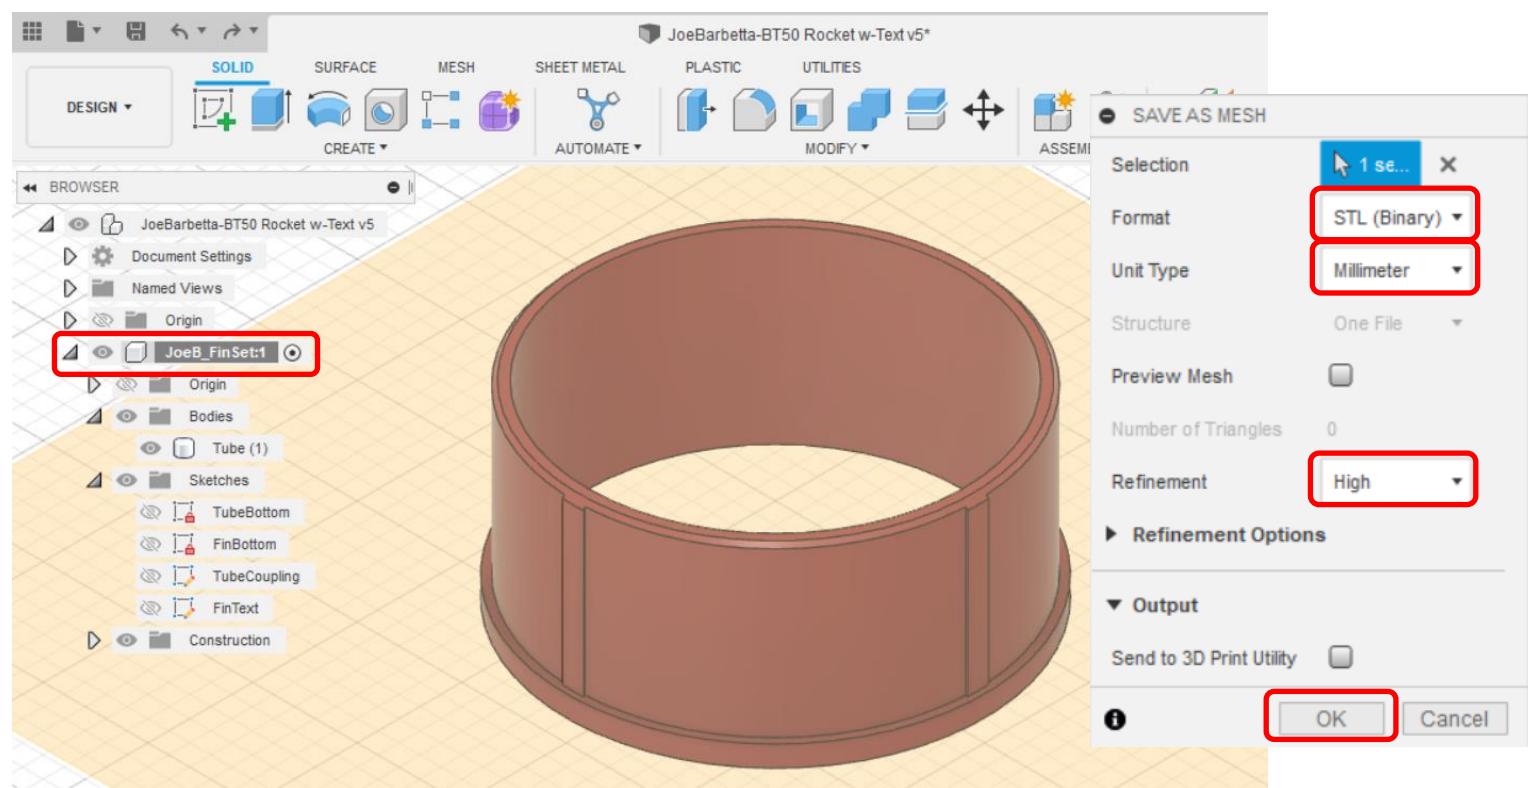

Using the Slicing Program Cura


If the **Cura** icon is not on the Desktop, click on the Windows **Search** tool, which can a magnifying glass icon.

Type Cura in the search box and you should find it.

If Cura prompts you to sign in or create an account, **choose not to**. If it is the first time Cura is used on that computer, it may prompt you to select a printer. Select “**Non Networked Printer**” and then **Ultimaker 5S**, which may be the top default printer. You may also have to click **Next** a few times.

- from the top **File** menu select **Open File(s)**. The top navigation bar of the Open file(s) can be used to navigate to the **.stl file location**. Select the **.stl file** and click **Open**.

Below is the view of the test print of the FinSet coupling after zooming in.

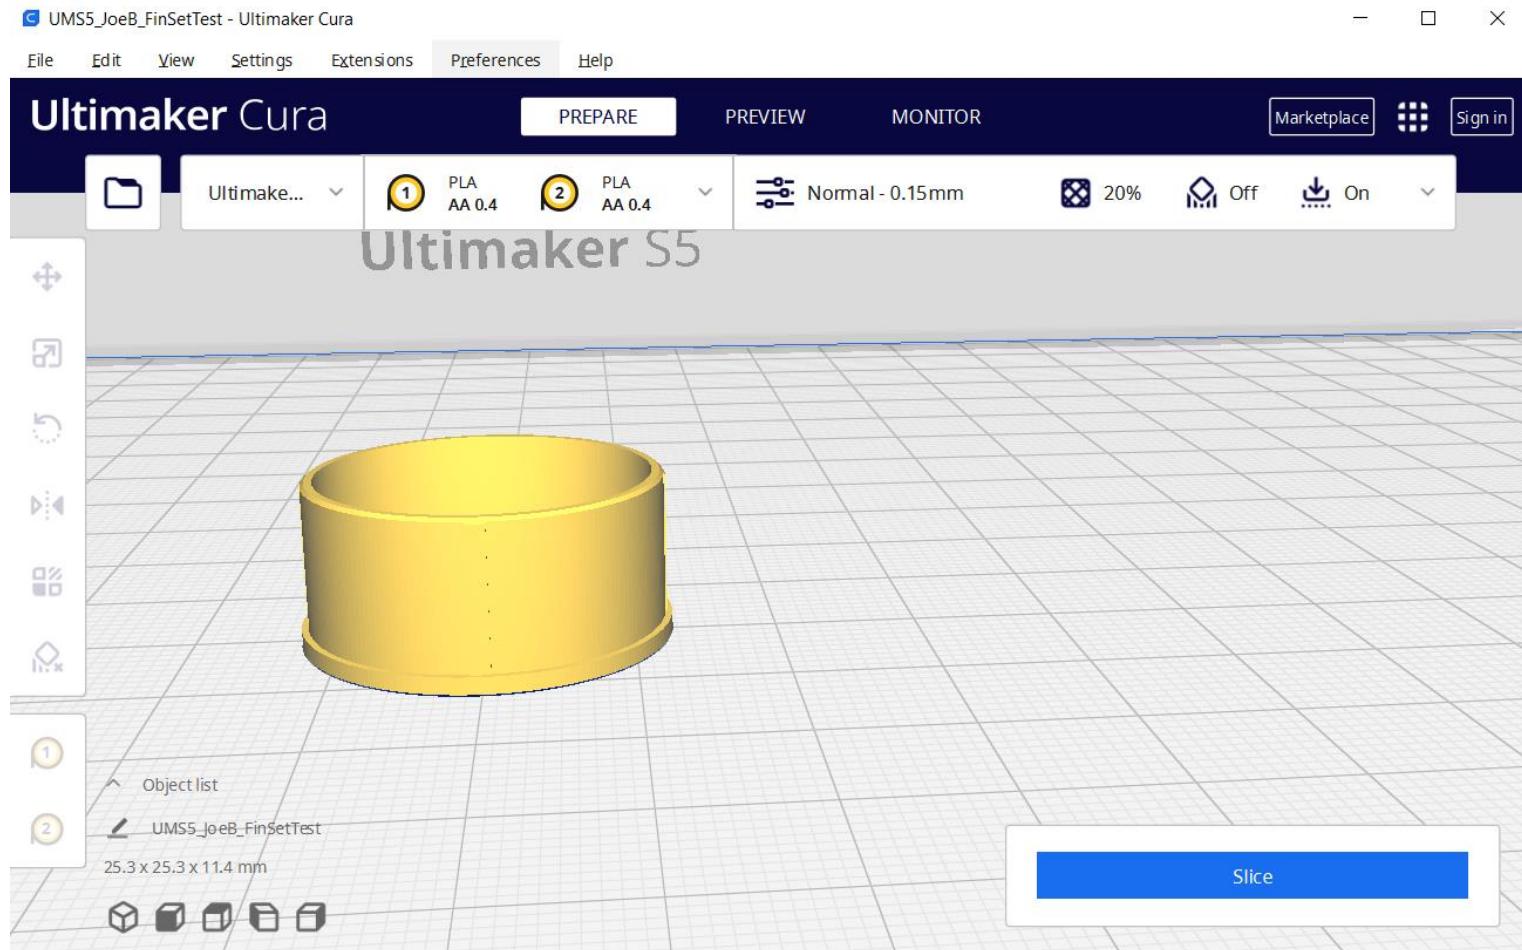


This program is annoying because it uses different methods to change the object view.

- Turning the mouse wheel zooms in and out. Holding the mouse wheel down allows panning.
- Holding the right mouse button changes the view angle.
- The **View Cube** options at the screen bottom left allows jumping to different views.


- Click on the object to select it. This will enable options on the left side of the screen.

Often, the object to be printed will be located in the center of the build plate and no manipulation is needed.


Here one can see that the object is properly oriented on the build plate.

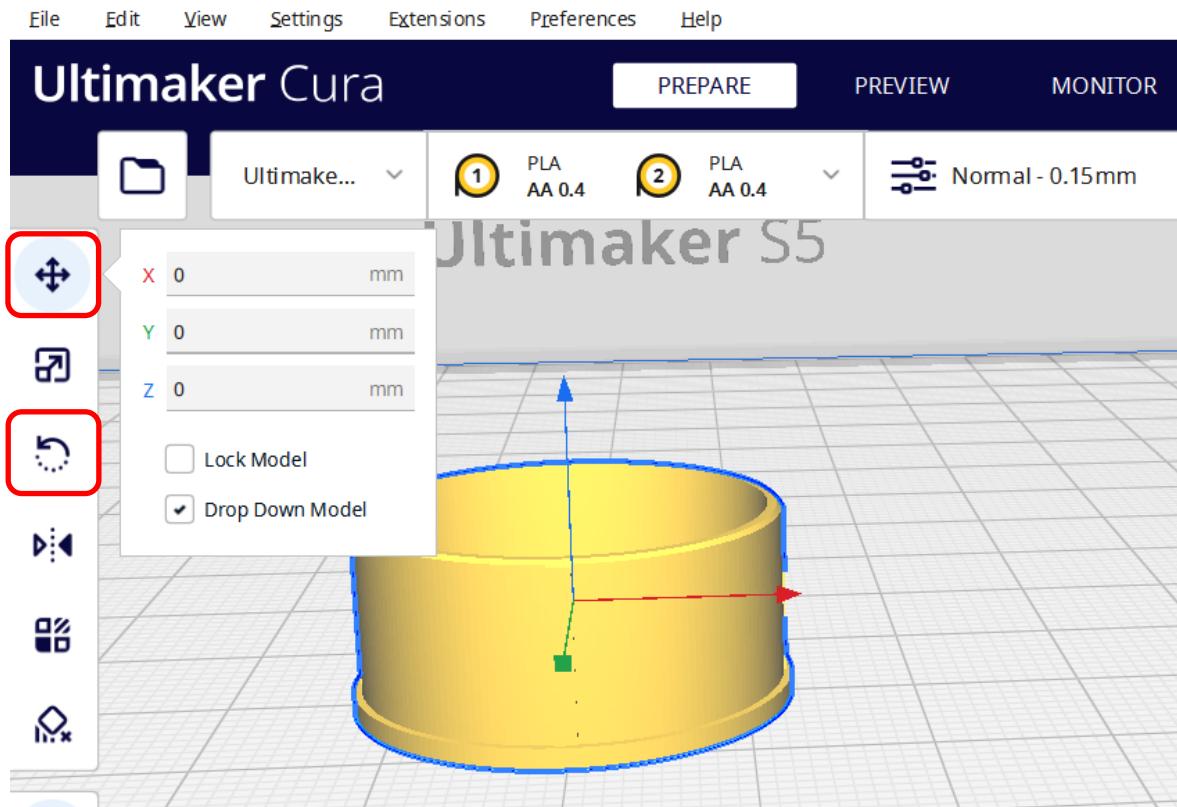

If an object is opened and is not in the proper orientation, the Rotate tool can be selected and the rotate arrows for the desired axis can be clicked on and moved. The angle will jump in 15 degree increments to make it easy to rotate an object.

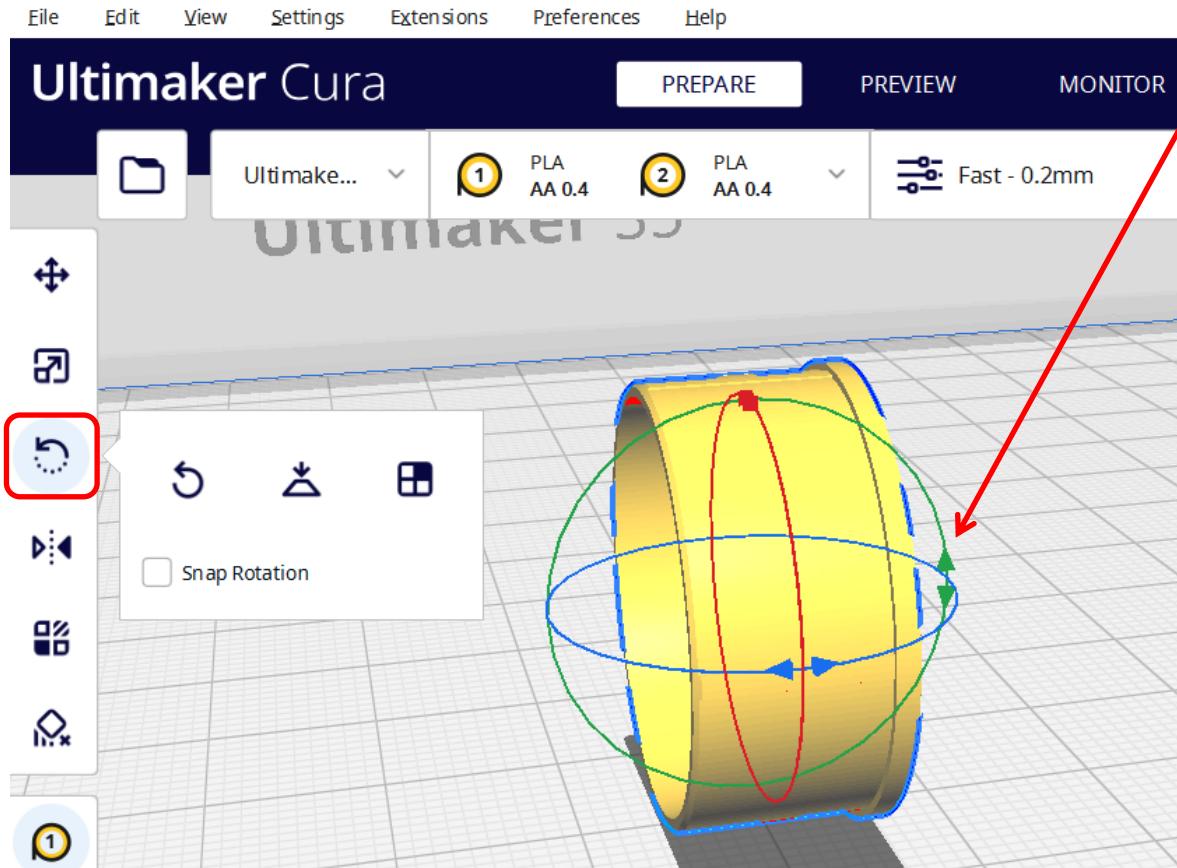


- click on the **settings bar** to open **Print settings**. The most common setting to change is the **Resolution**.

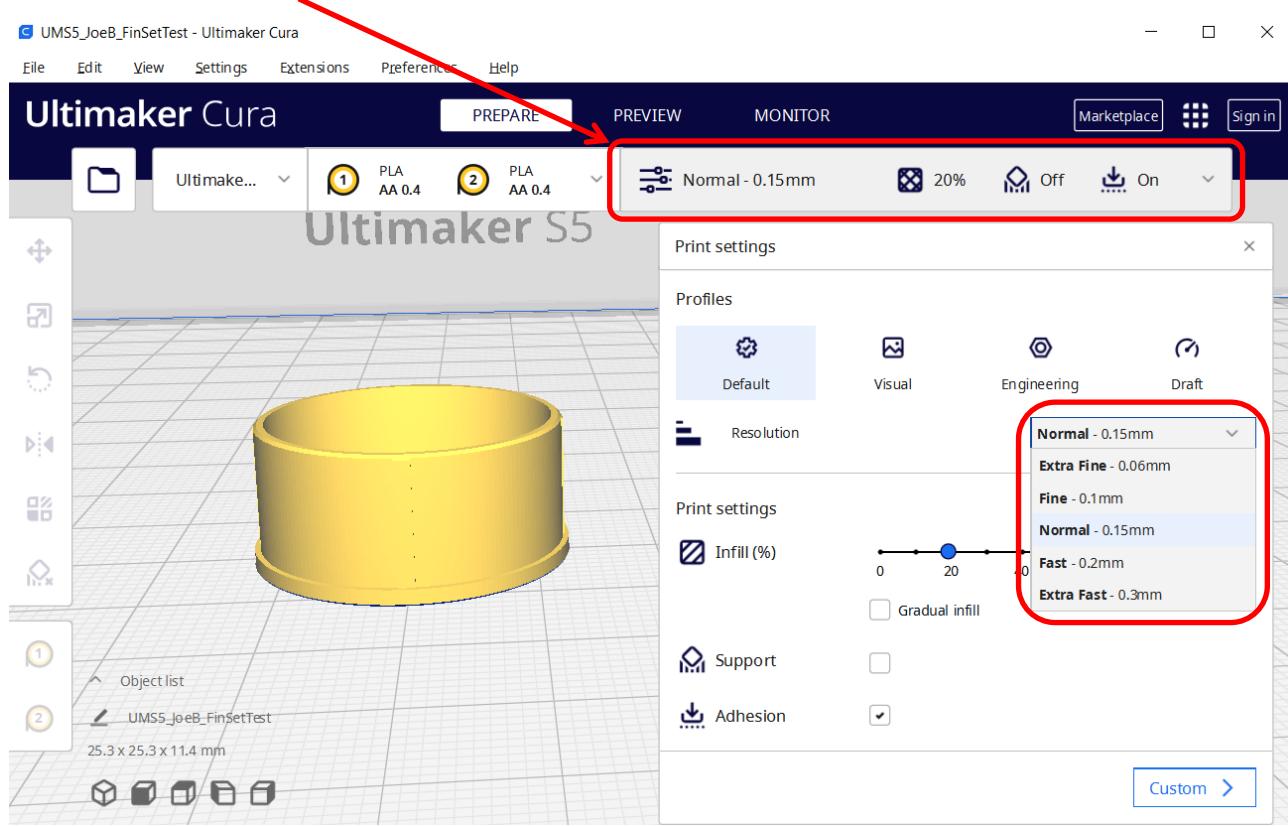

The Resolution setting is a compromise between quality and print speed. A thinner layer will result in better accuracy for top surface features. For example, the top of any angled or rounded surfaces will appear smoother with smaller resolutions because each layer is thinner. When prioritizing printing speed, a larger resolution for thicker layers can be selected.


- click on the **Slice** button. A new window will pop up, which will show how long the print will take. Clicking on **Save to Disk** will allow the **.ufp** to be saved. This is the file that will be loaded onto the 3D Printer.

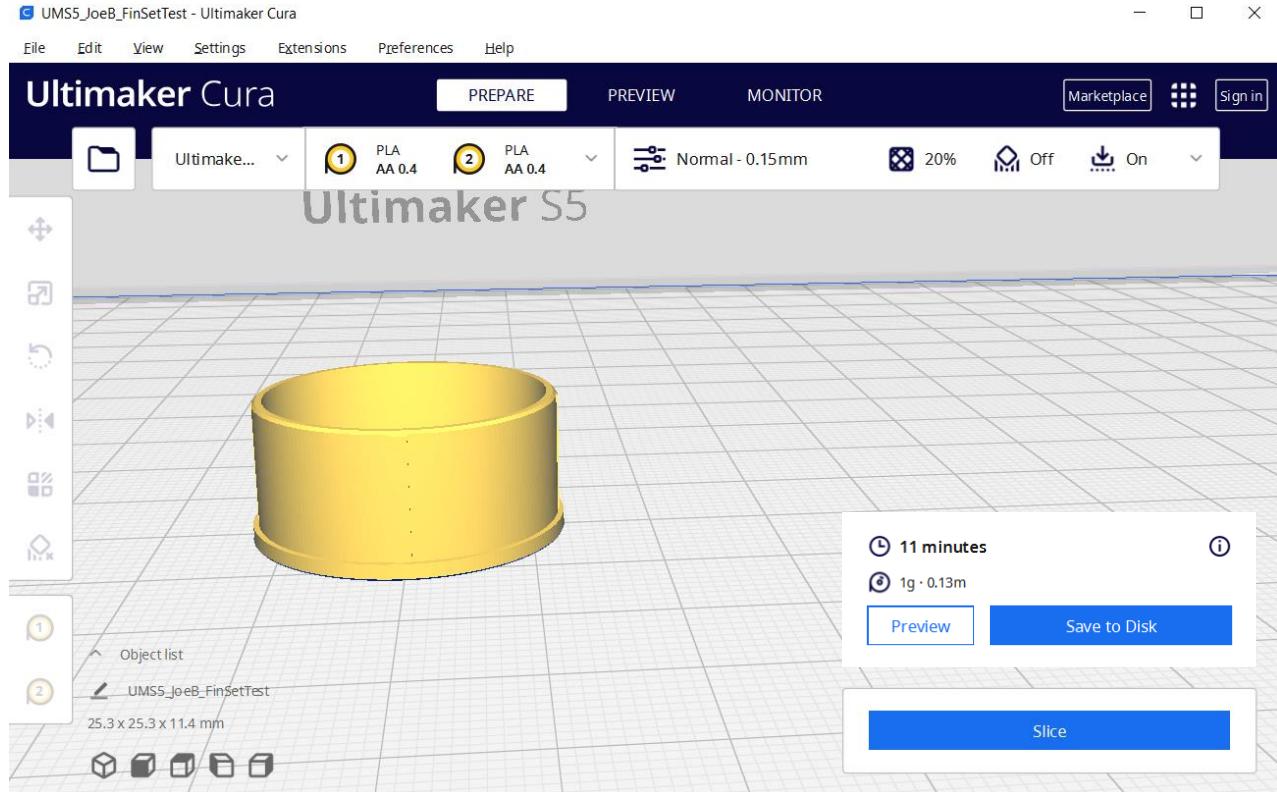

Creating a New Component for the Nose Cone

- right-click on the top line in the **Browser** and select **New Component**. This will insure it is a “top level” component and not as part of another *Component*.

- enter the component name: <your first name and last name initial> NoseCone e.g. **JoeB_NoseCone**

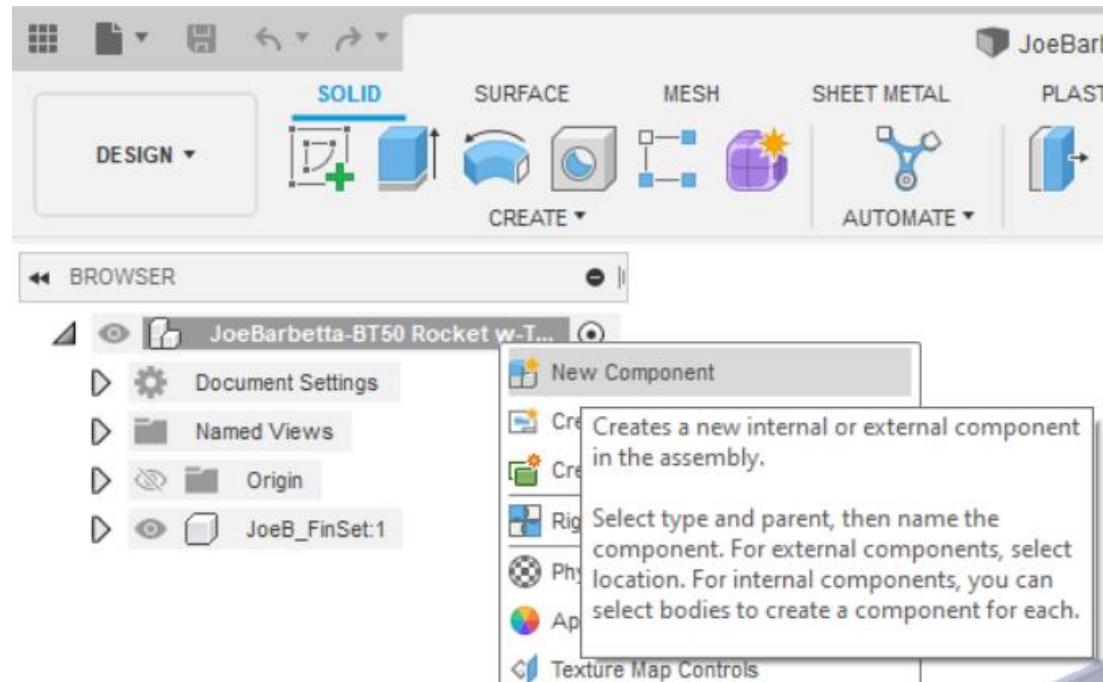


- next to **User Parameters** click on + and enter the **Name** and **Expression** for each item in the below list. Note that you will need to click + for each item. You may be able to copy and paste Expressions, but **if it shows as red you may have to type the expression.**

- **Don't forget to click OK when done!**

Name	Expression
Nose_Length	3.000
Nose_Thickness	0.040
Nose_OD	0.997
Nose_CouplingOD	0.950
Nose_CouplingID	0.950
Nose_CouplingLength	0.400


Creating a Construction Axis

- within the **CONSTRUCT** menu select **Axis through Cylinder/Cone/Torus**
- click on the **inside of the FinSet tube** and click **OK**. A blue “center line” with alternating long and short dashes should appear.

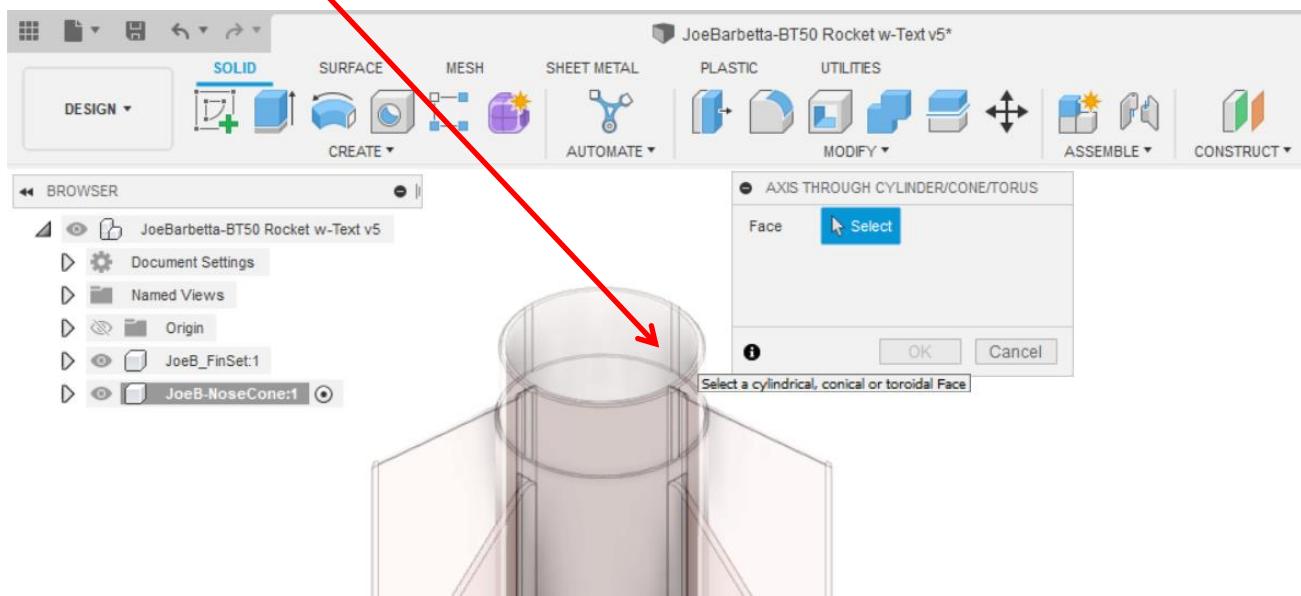


Creating a Construction Plane


- within the **CONSTRUCT** menu select **Plane at Angle**
- click on the **Construction Axis** and click **OK**. Do Not enter an Angle. It will be kept at the default of 0.

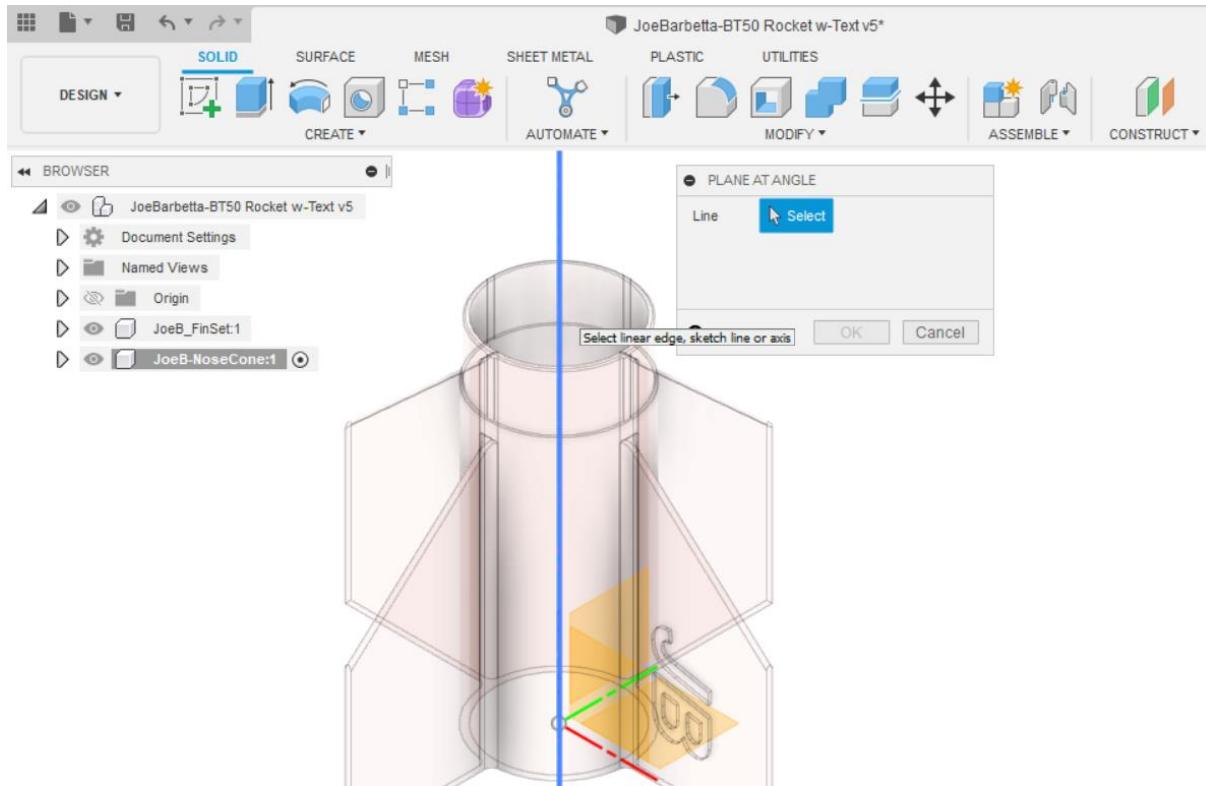

Here the view was changed to show this new vertical plane through the center of the Fin Set. One needs to create a **Construction Plane** if needed for a new sketch that can't be started on an existing plane or object face.

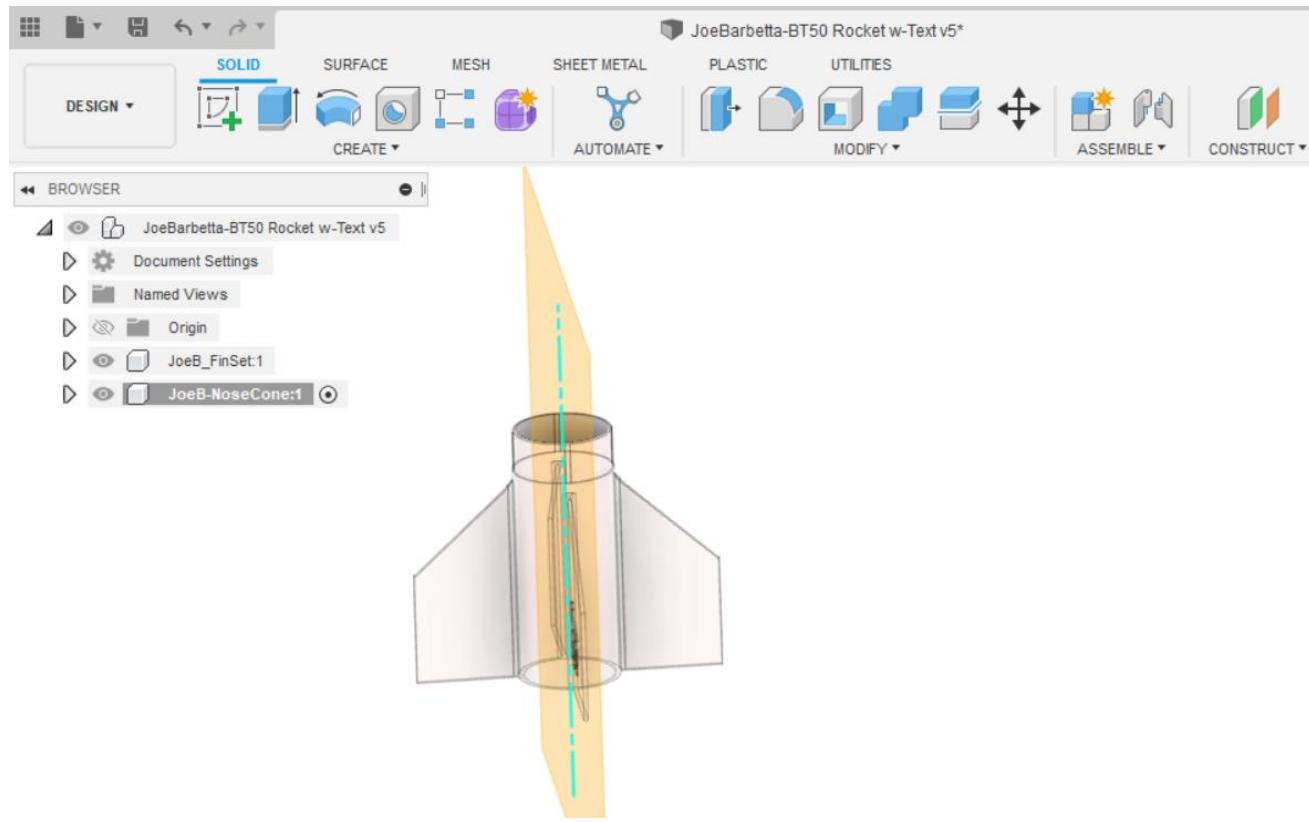

- click on the top **Sketch** tool and click on the **Construction Plane** that you just created

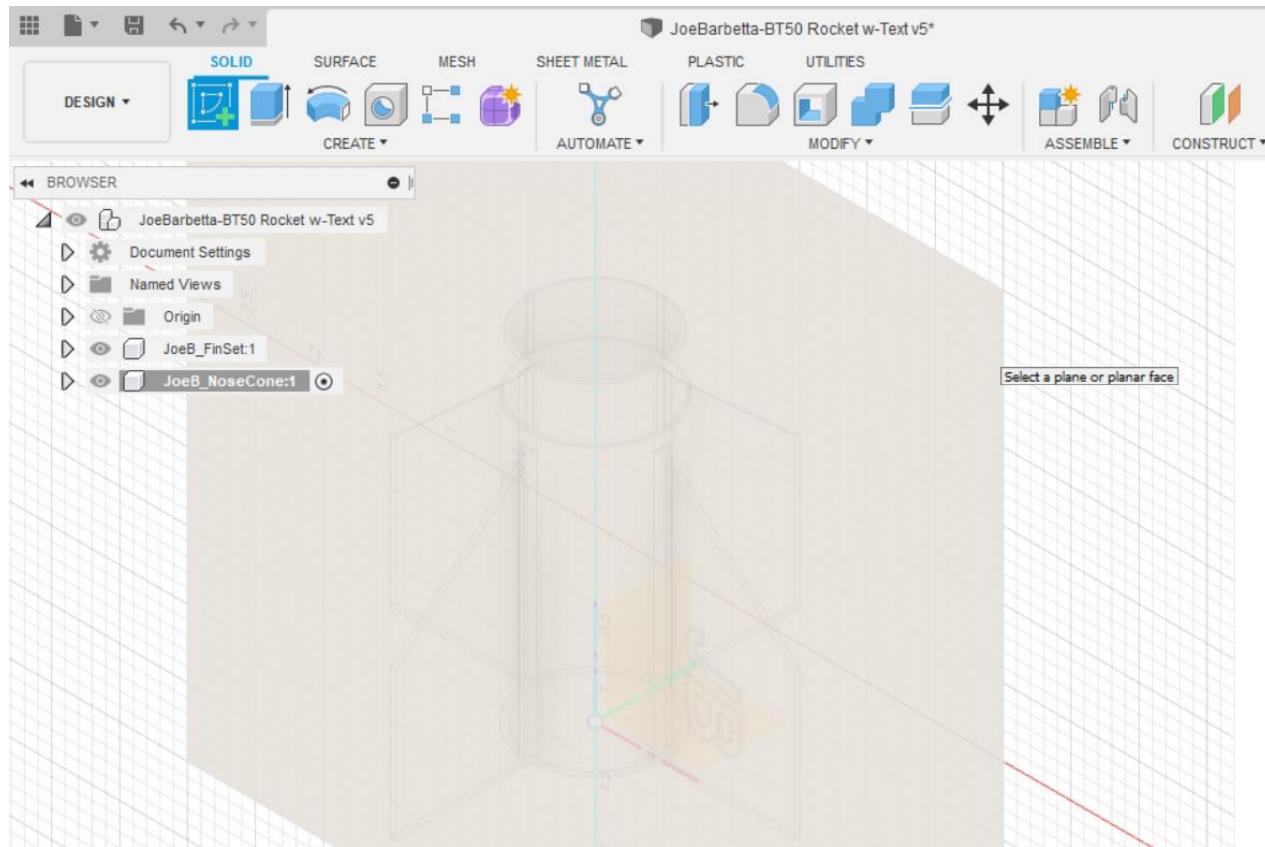


- zoom in so that you can sketch just above the FinSet

- click on the Construction icon next to LineType to turn it blue


- create a line starting at **1** (on the centerline just above the FinSet) and upward. Type **n** and select **Nose_CouplingLength**

We are using **n** now because this will list the parameters starting with those starting with **n**.

- create another line from **2** (the end of the previous line) to the left. Type **n** and select **Nose_OD** and then use the right arrow key to allow adding **/2** after **Nose_ID**. This is an example of combining a parameter with an operation for a dimension and should result with the end of that line near **3**.

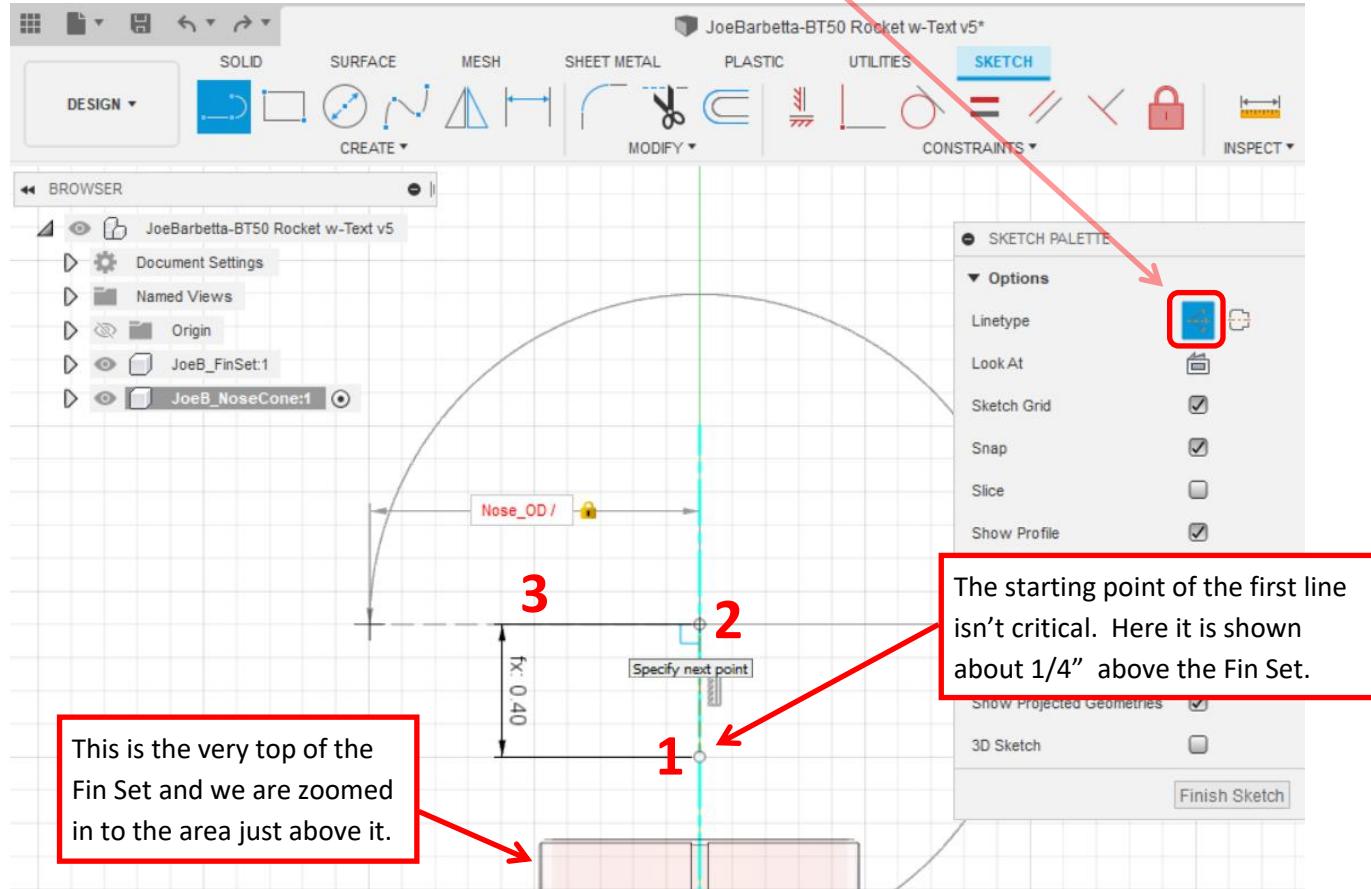


- create a line from **3** down **0.2** in. Below is a zoomed in view.

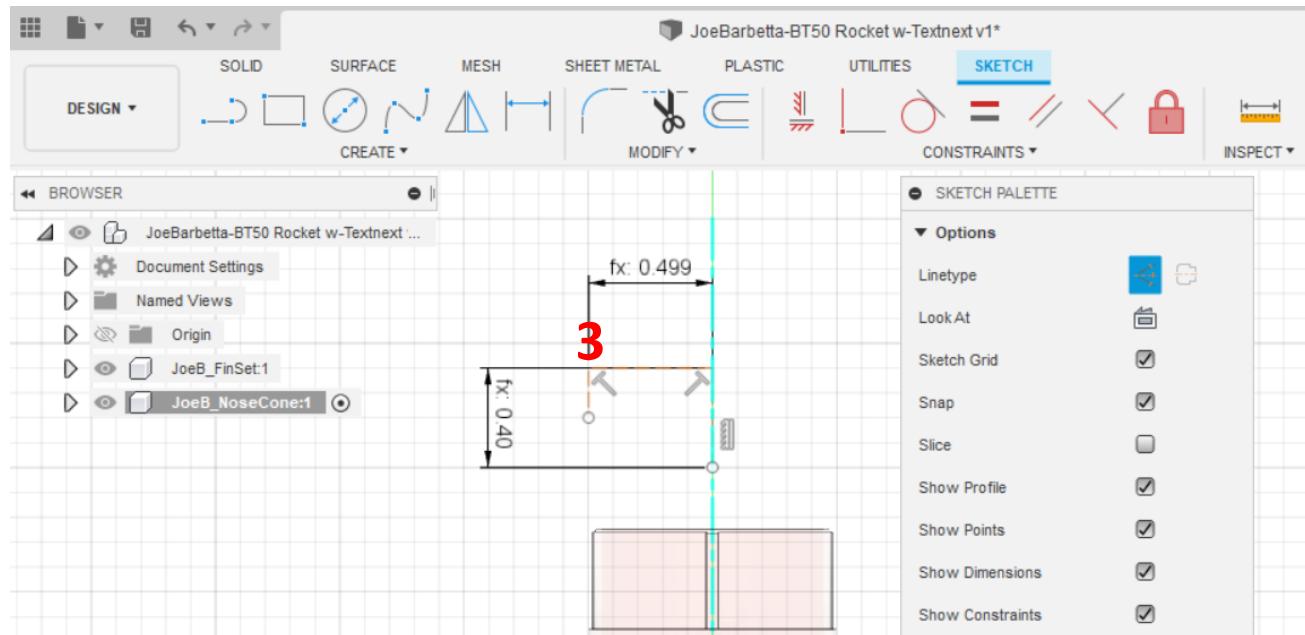

- create a line starting at **2** and upward. Type **n** and select **Nose_Length**.


Remember not to worry if the dimension lines look different. In fact, one can click on a dimension line and move it without affecting the design.

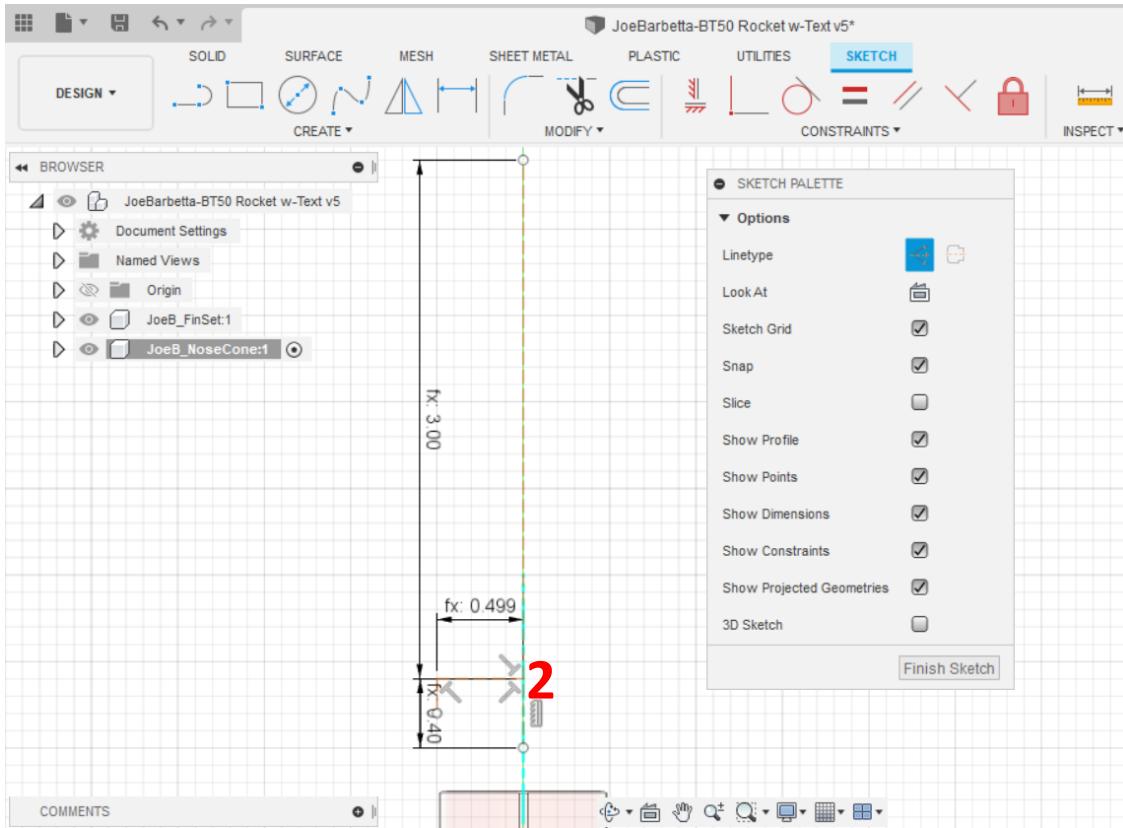


- click on the Construction icon next to LineType to turn off the blue highlighting to draw “normal” lines.

- from the CREATE menu select Arc and then Tangent Arc and click on point **1** and then point **2**.


The result is shown on the right.

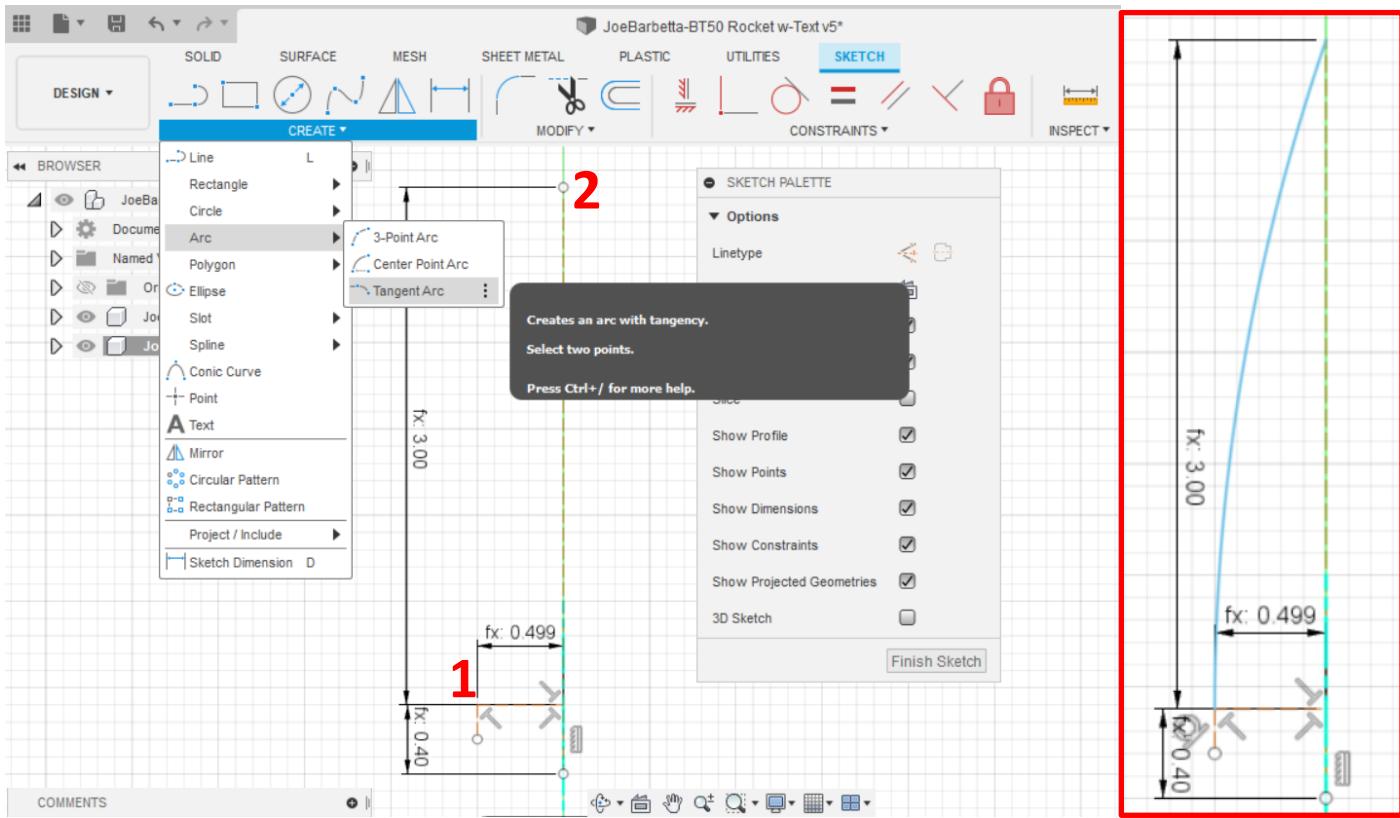


- select the Offset tool and type –n (note the negative before n) and select **Nose_Thickness**. The negative is needed to force the red arc to the right of the blue arc.
- click **OK** in the **OFFSET** window.

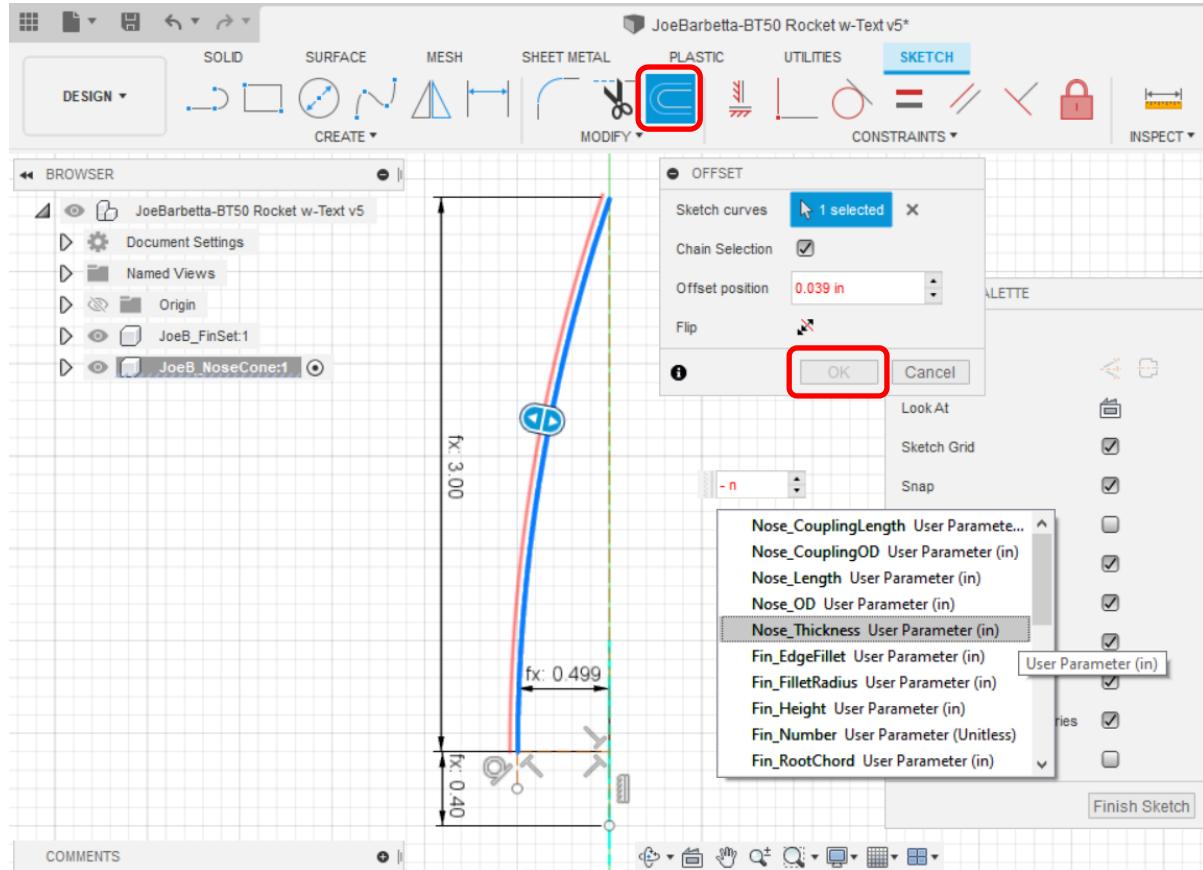

- zoom in to the top and create a line from the top point at **1** and down until it meets the lower arc at **2**.

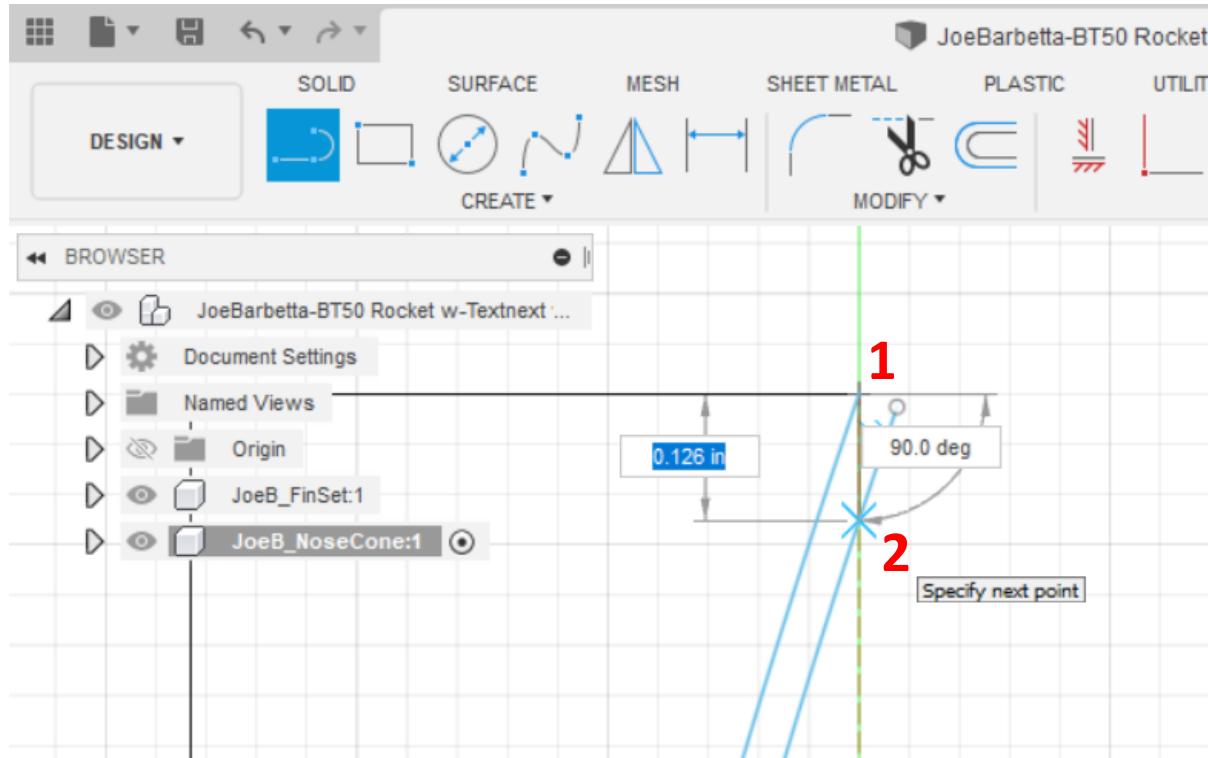


- zoom in to the bottom and create a line to close the bottom. The profile interior should turn blue.

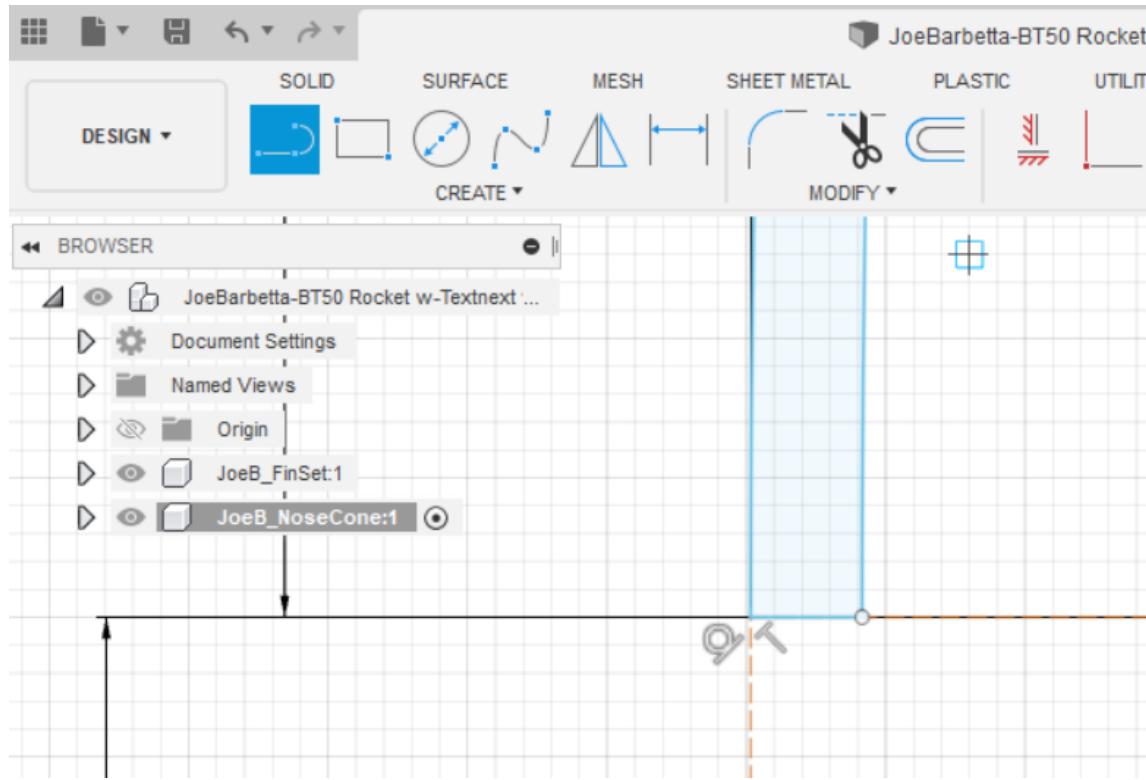


- when zoomed out it should look like below. Again note that the black dimension lines may look different.

- click **Finish Sketch**

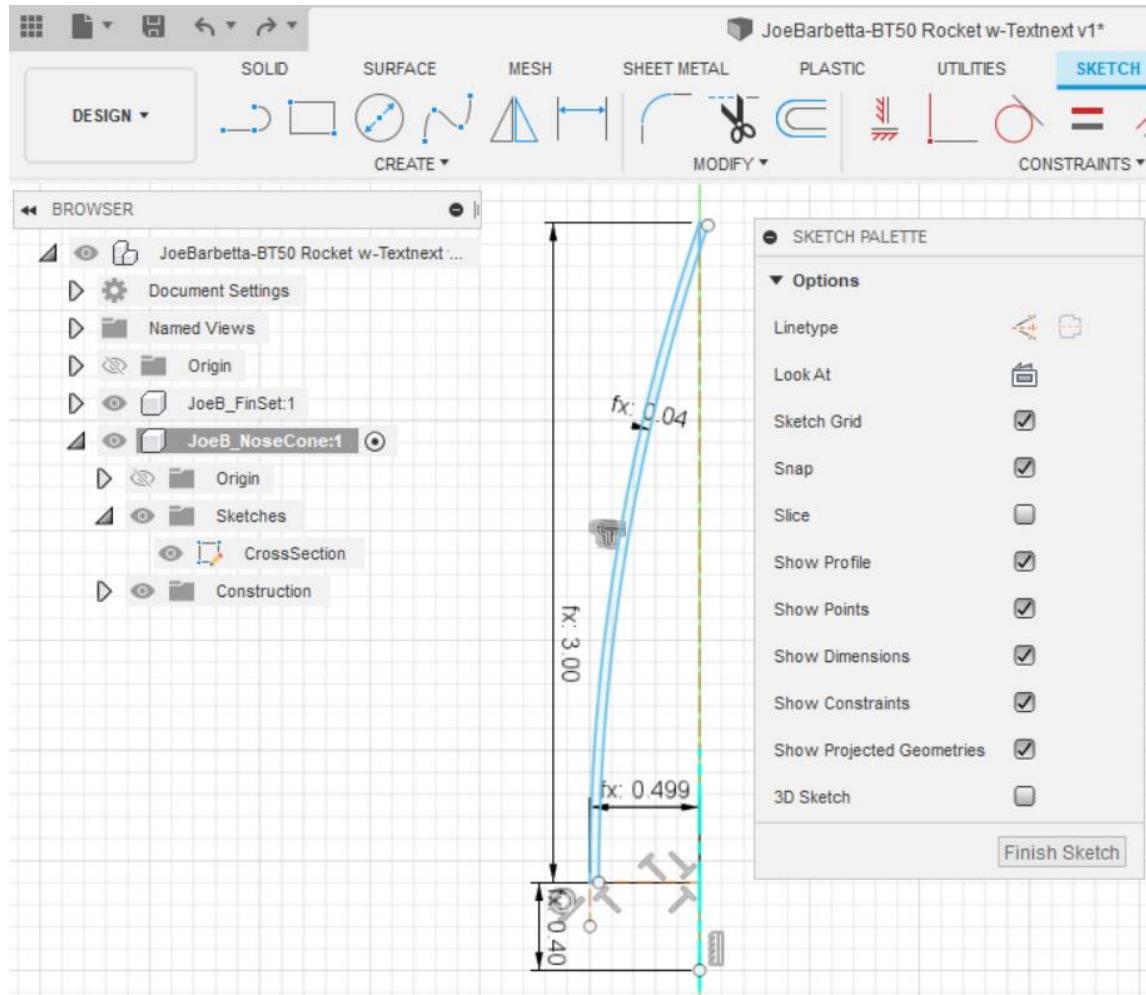


Using the Revolve Tool


- select the top **Revolve** icon or select **Revolve** from the **CREATE** menu. The profile should turn darker blue.
- click on **Select** next to **Axis** and click on the center line. You should see the resulting closed cone.
- click **OK** in the REVOLVE window

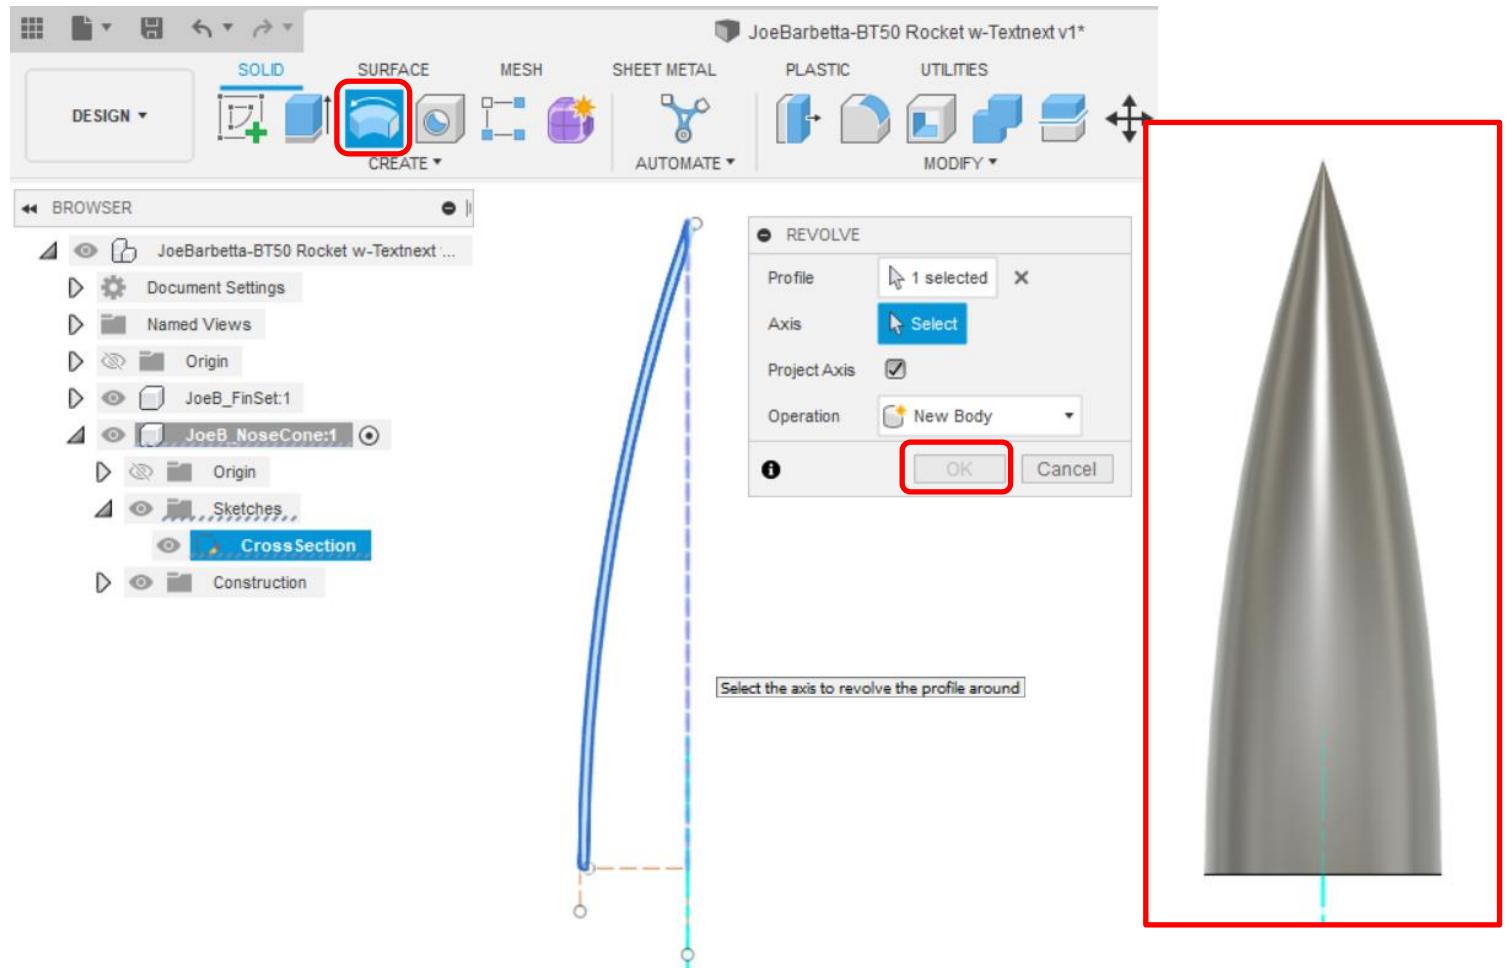


- hide the FinSet by clicking on the eye icon for the FinSet. One can use the eye icons to hide or unhide items in the BROWSER.
- rotate the view using either the **View Cube** or the bottom **Orbit** tool
- select the **Sketch** tool and click on the **bottom of the Nose cone**

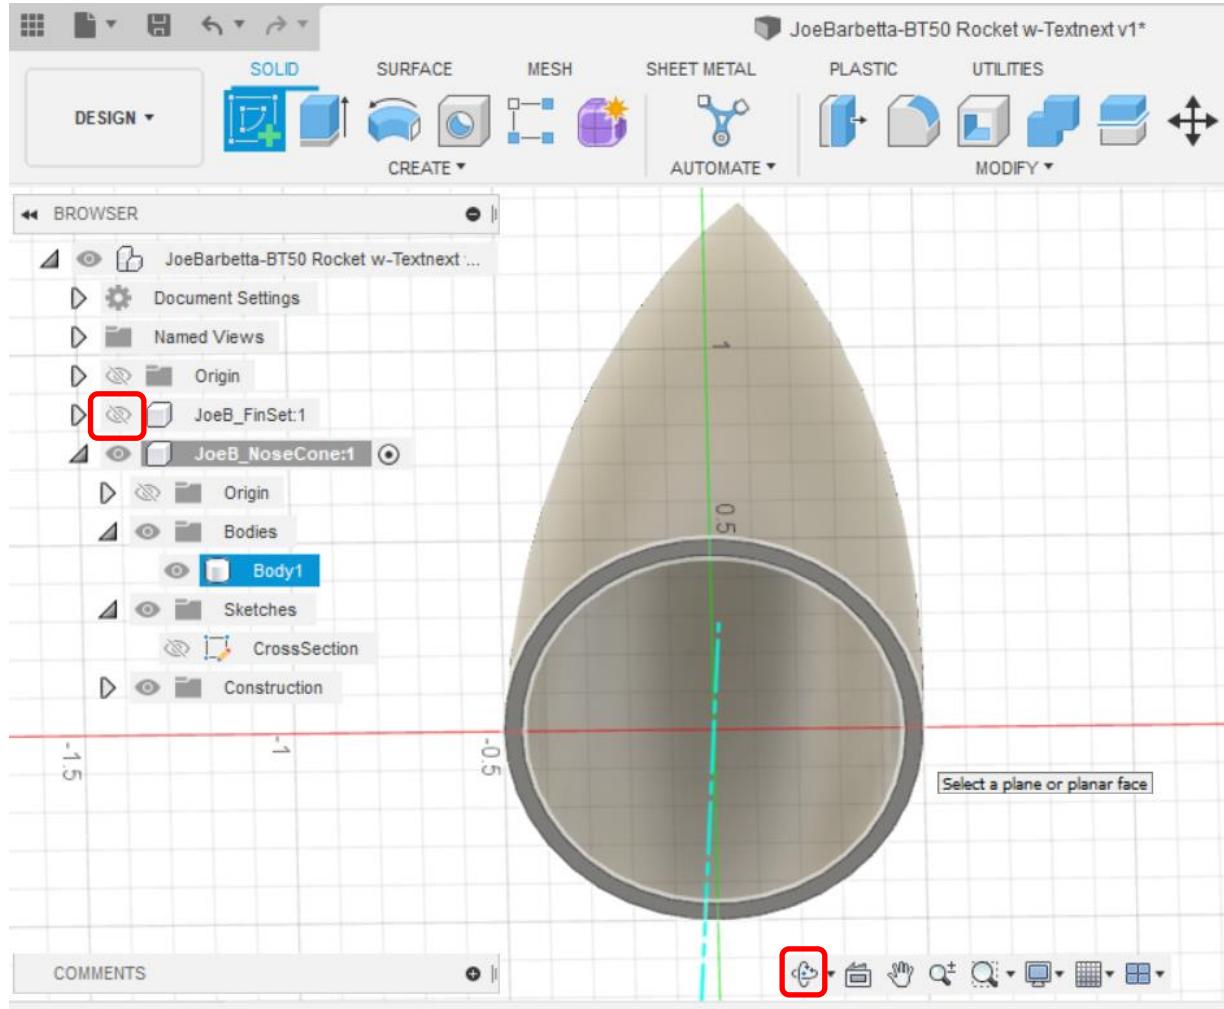


- select the **Circle** tool to create a circle from the center point. Type **n** and select **NoseCouplingOD**

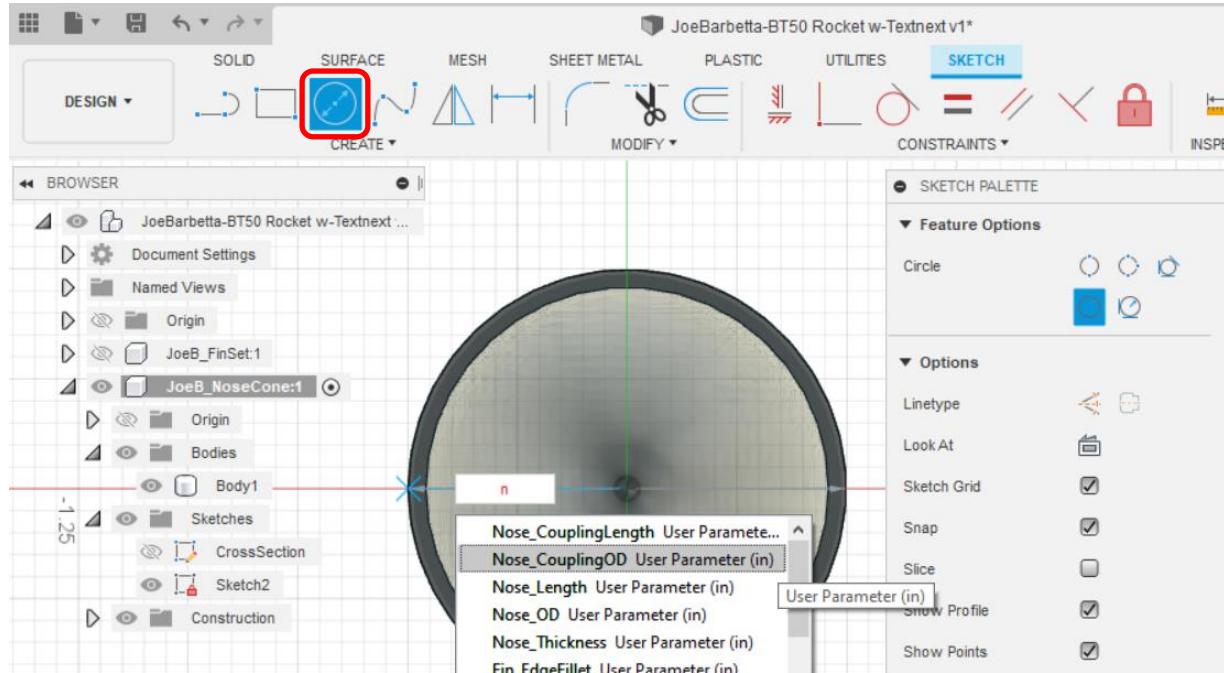


- select the Offset tool and type -n (note the negative before n) and select **Nose_Thickness**. The negative is needed to force the red arc to the inside of the blue circle.
- click **OK** in the **OFFSET** window and **Finish Sketch**

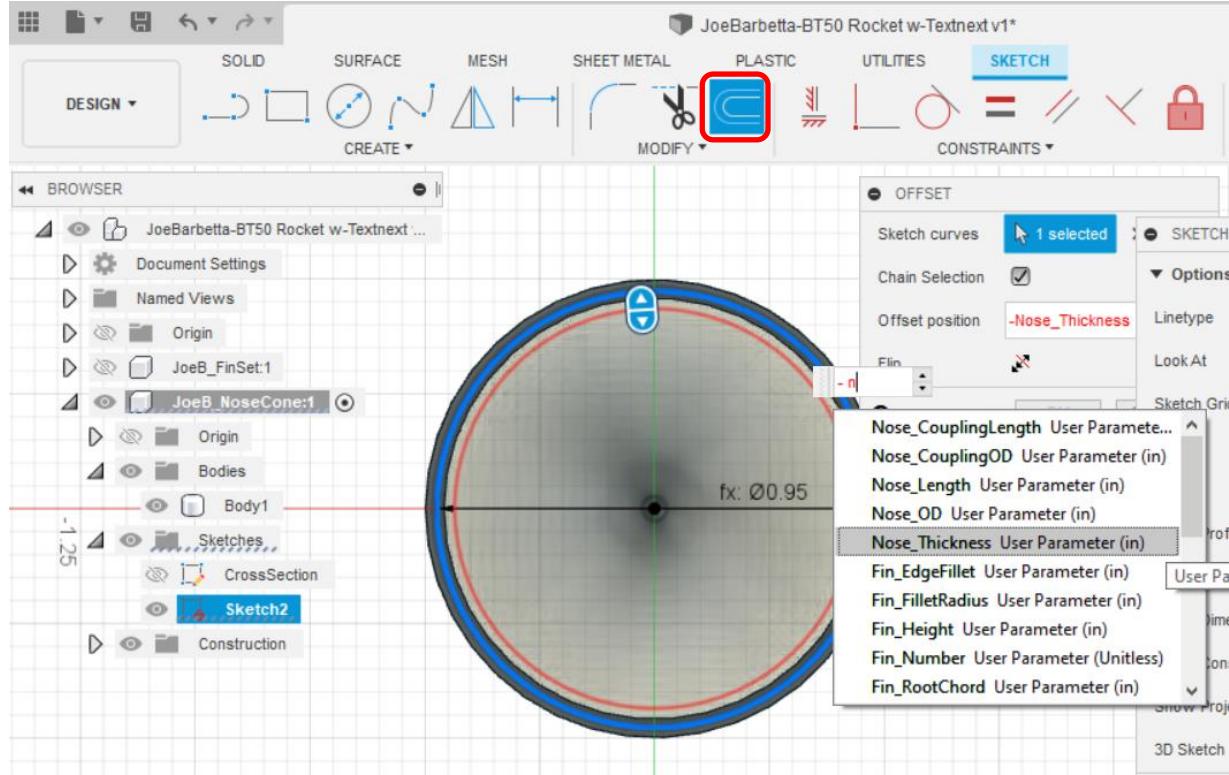

- select the **Extrude** tool and type **n** and select **Nose_CouplingLength**.
- as indicated by the two red arrows one must click on **both the inner and middle ring areas**.
- ensure **Join** is selected for the **Operation**
- type **n** and select **Nose_CouplingLength** and click **OK**

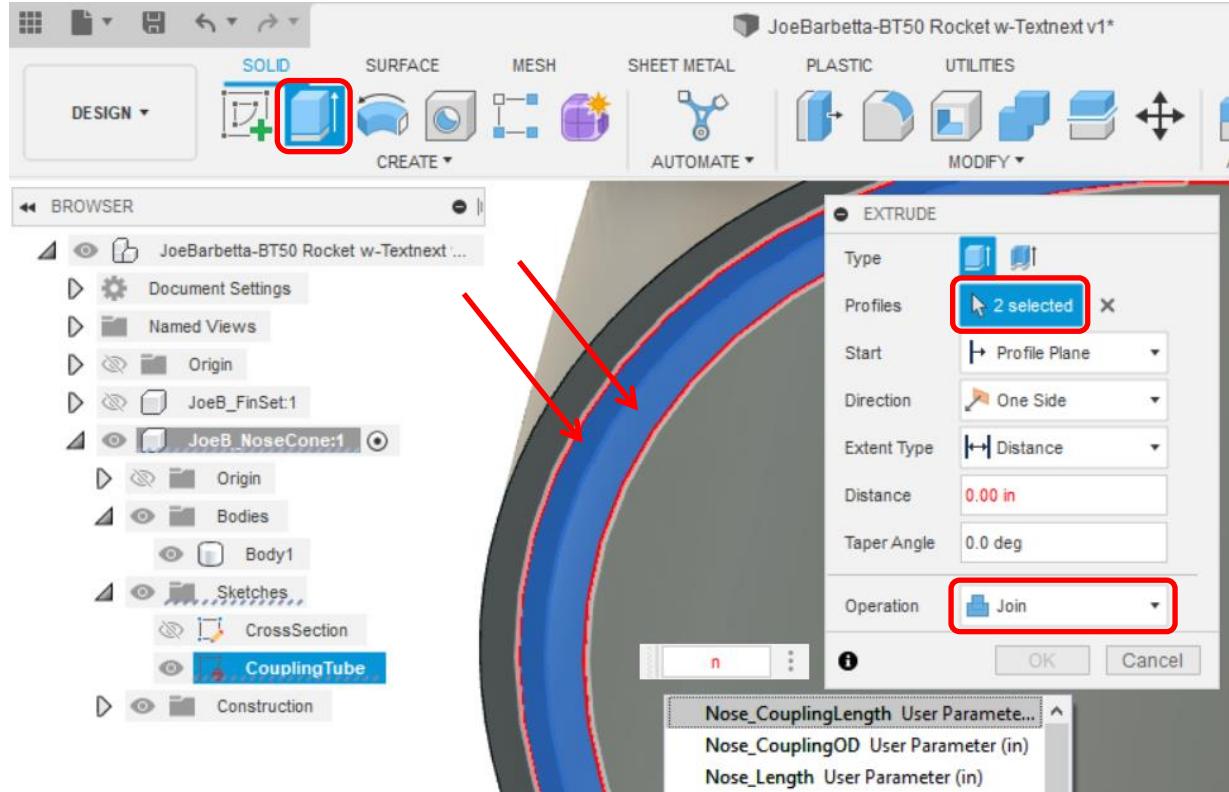


- select the **Extrude** tool again
- click on the ring area indicated by the red arrow to select the hidden top of the Coupling Tube.
- ensure **Join** is selected for the **Operation**
- type **0.1** and click **OK**

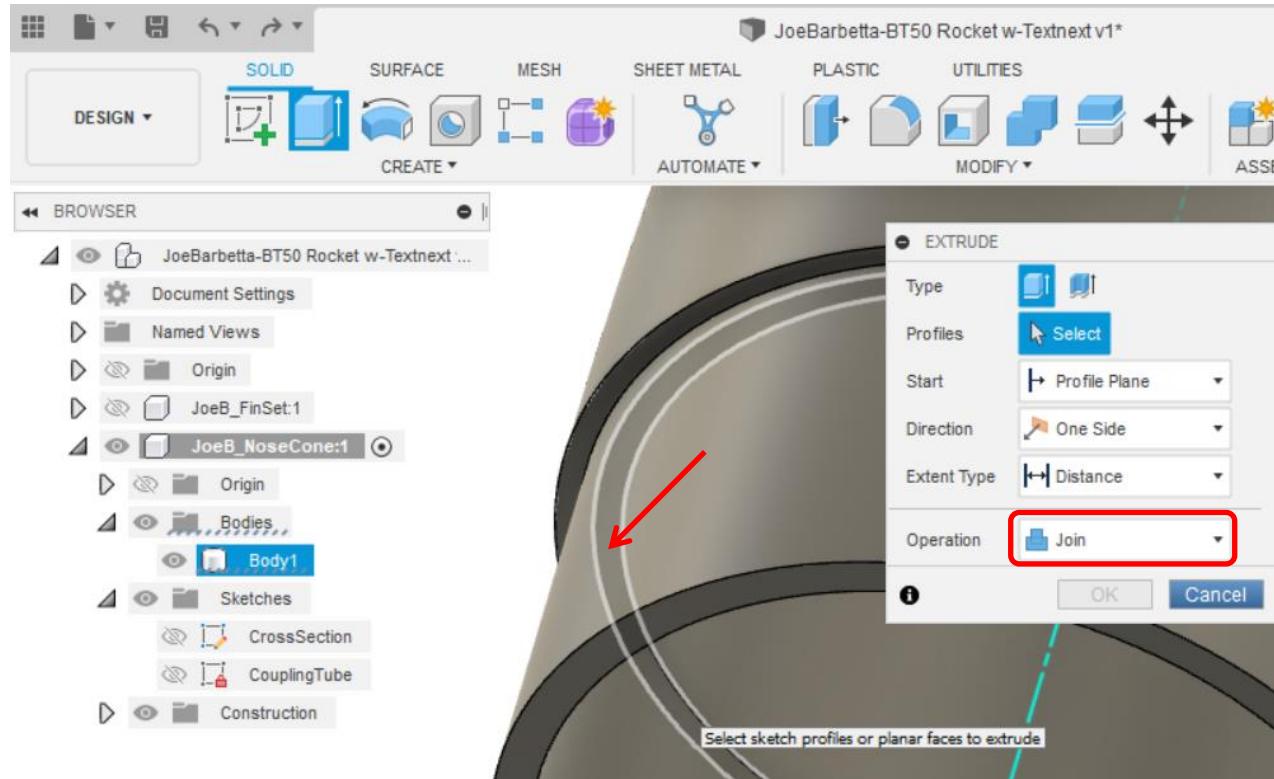

- right-click on the **Component Name** for the Nose Cone and select **Opacity Control** and **50%**


Note that the Nose Cone is now transparent as shown on the right.

- right-click on the **Component Name** again and change **Opacity Control** back to **100%**

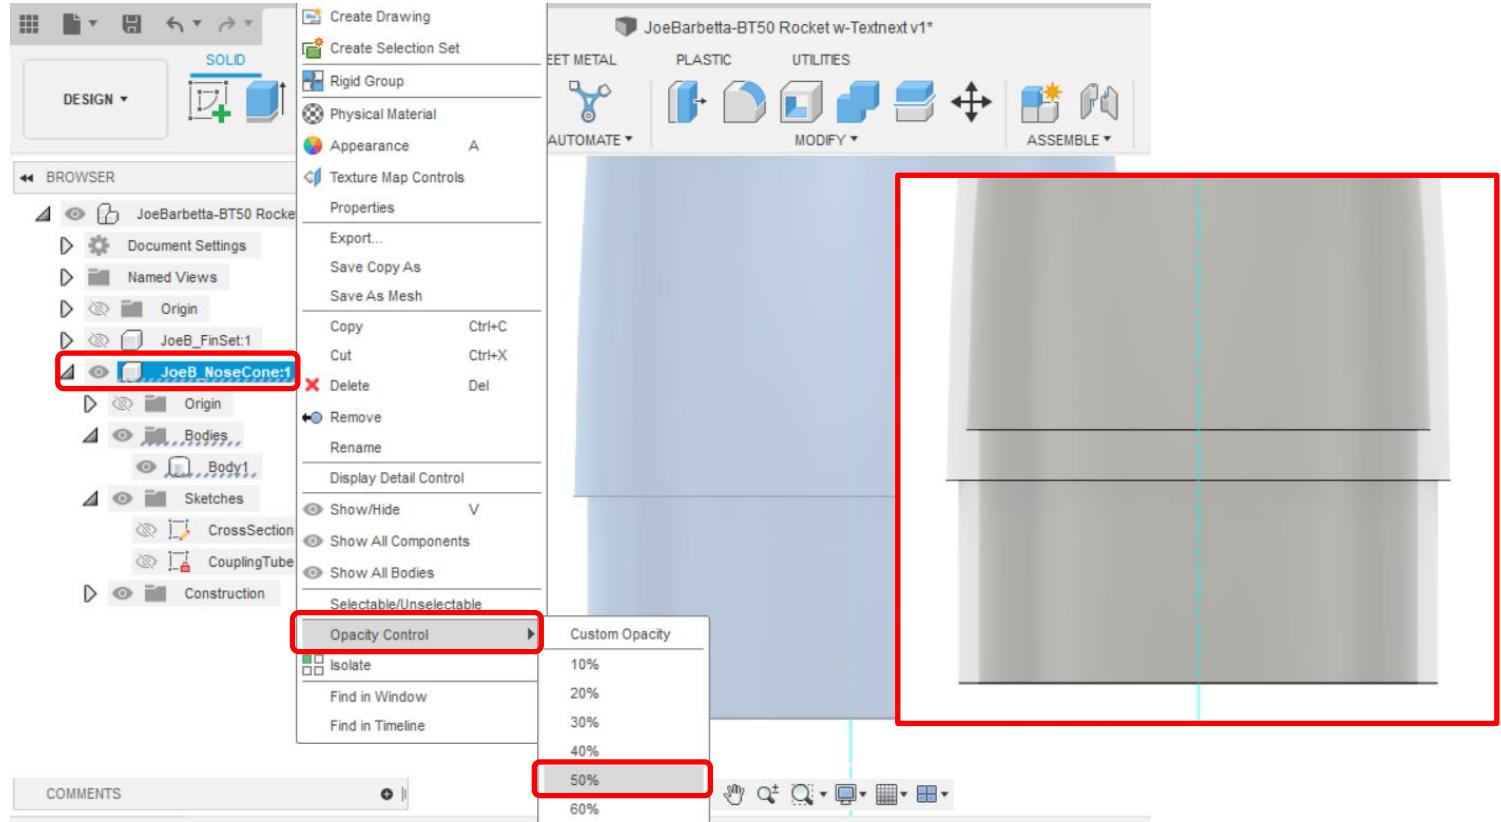

As we did for the Fin Set, we should add ribs that can easily be sanded or scraped to ensure the best fit in the body tube.


- select the Sketch tool and click on the bottom of the coupling.

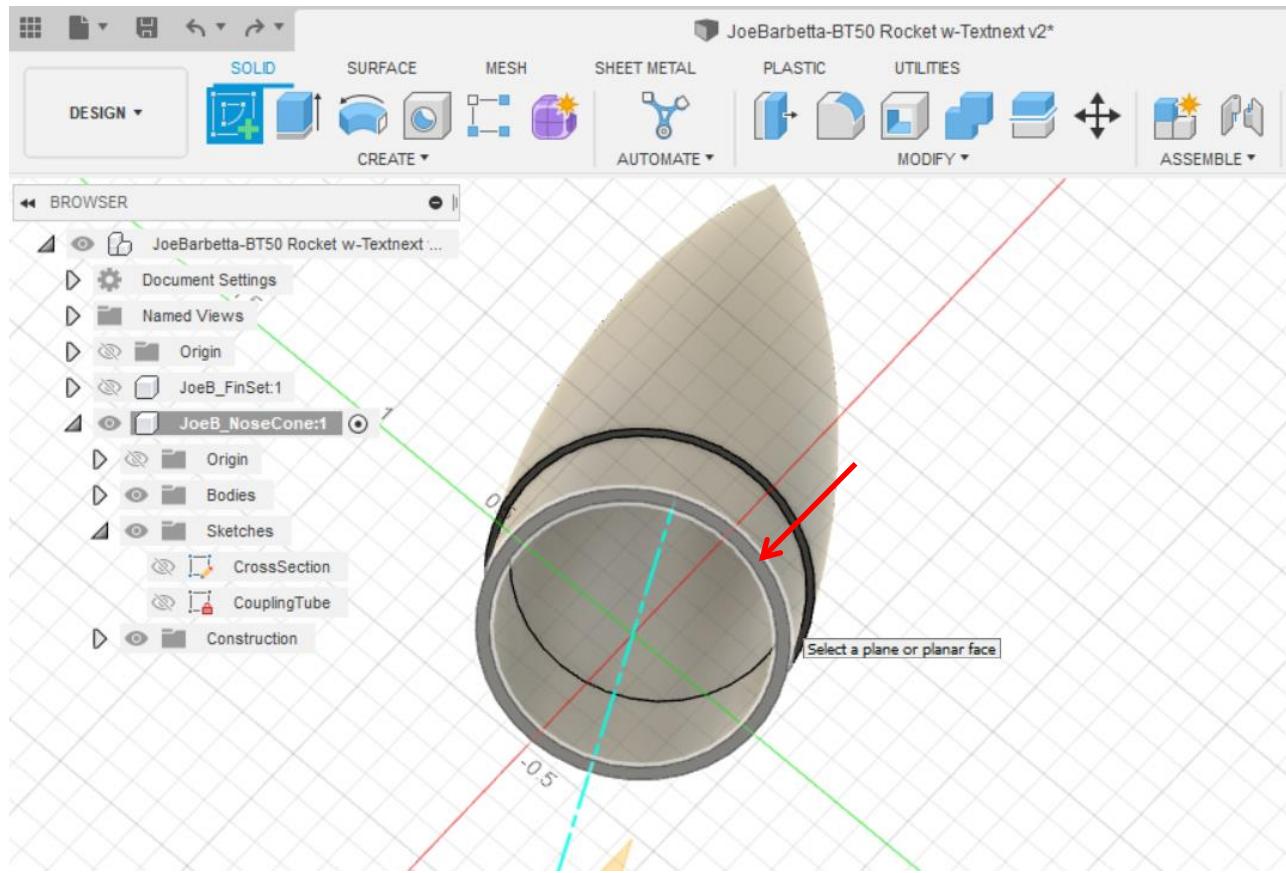


- zoom in as shown below

- click on the Construction icon next to LineType to turn it blue


- create a line starting at the center and up towards the edge. Type **n** and select **Nose_CouplingRibPos**

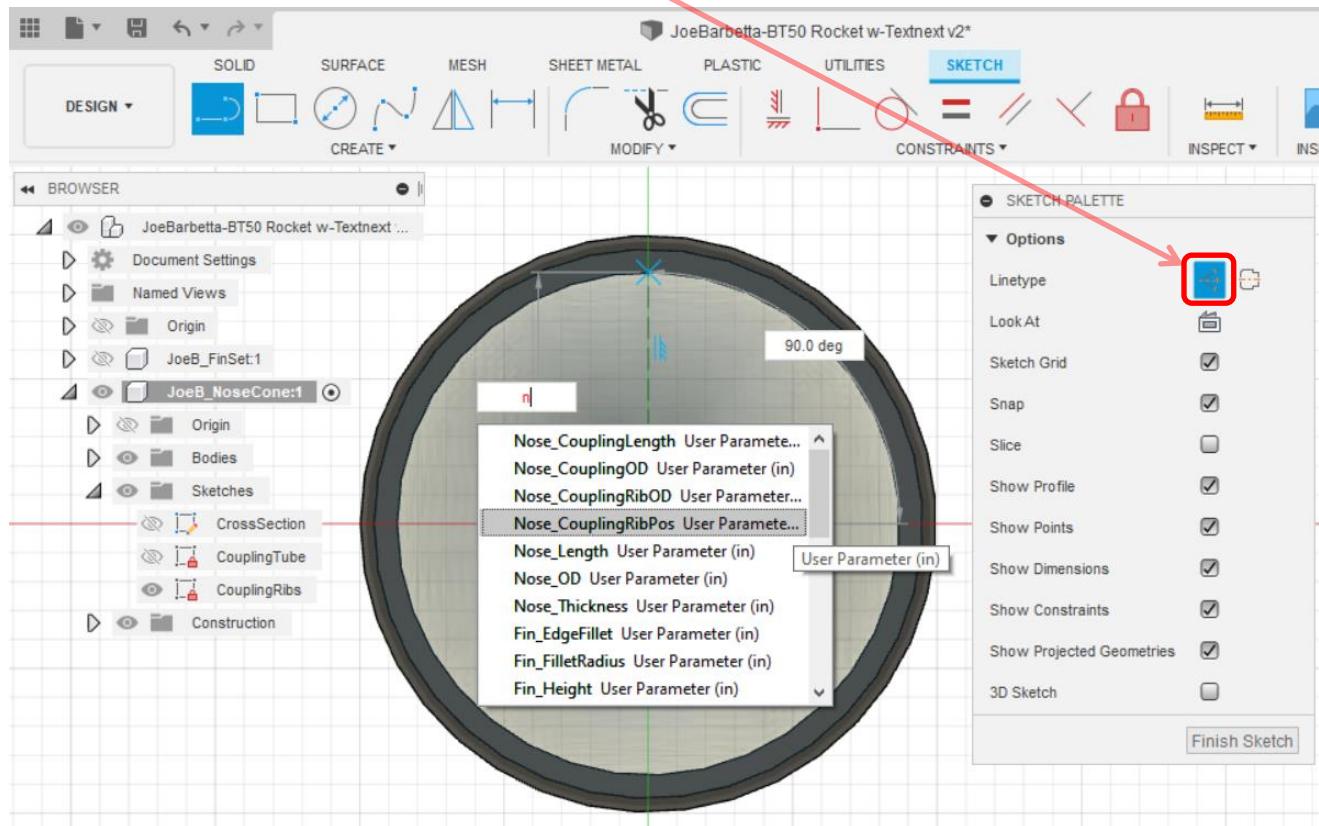


- click on the Construction icon next to LineType to remove the blue highlighting to create normal lines
- create a Circle from the center and type **n** to select **Nose_CouplingRibOD**

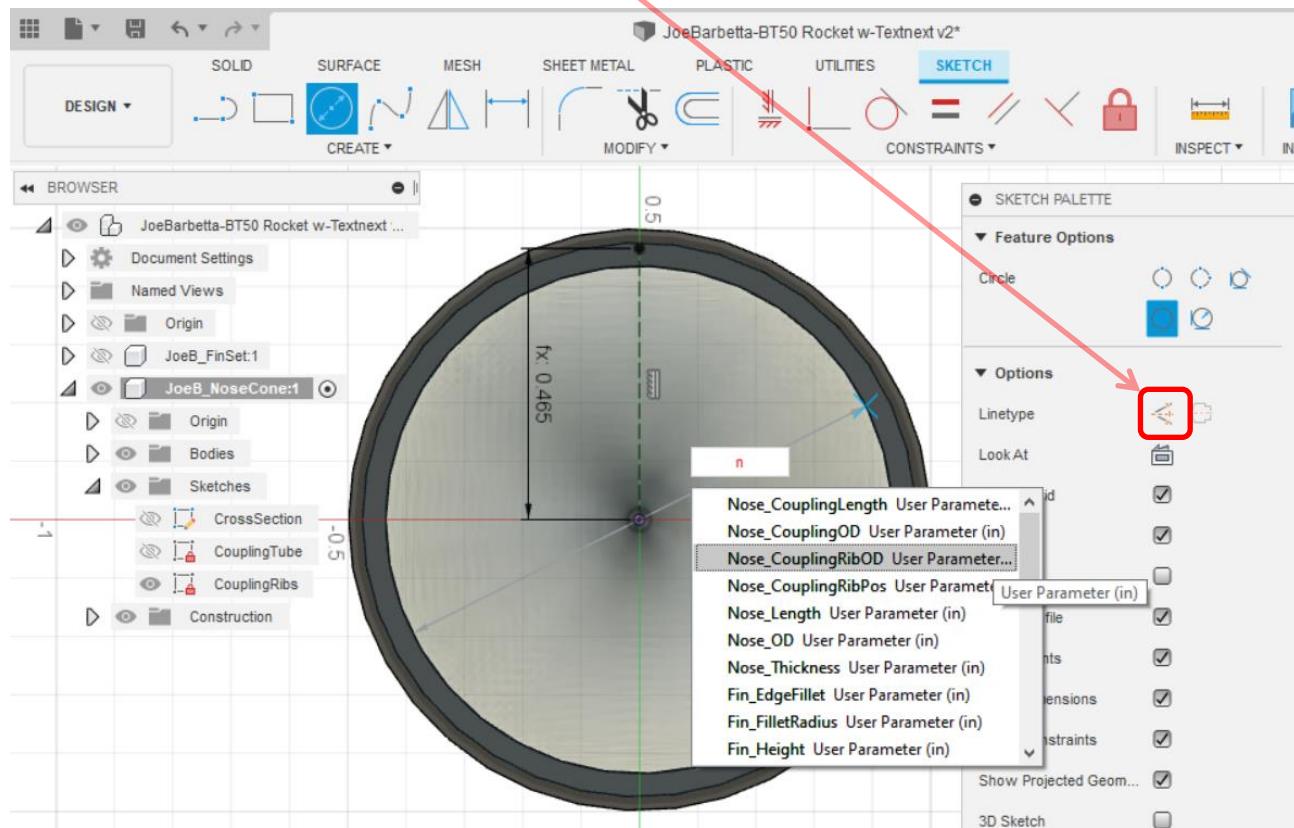


- create a Line from the top of the Construction Line at **1** to the left near **2** and enter **0.025**

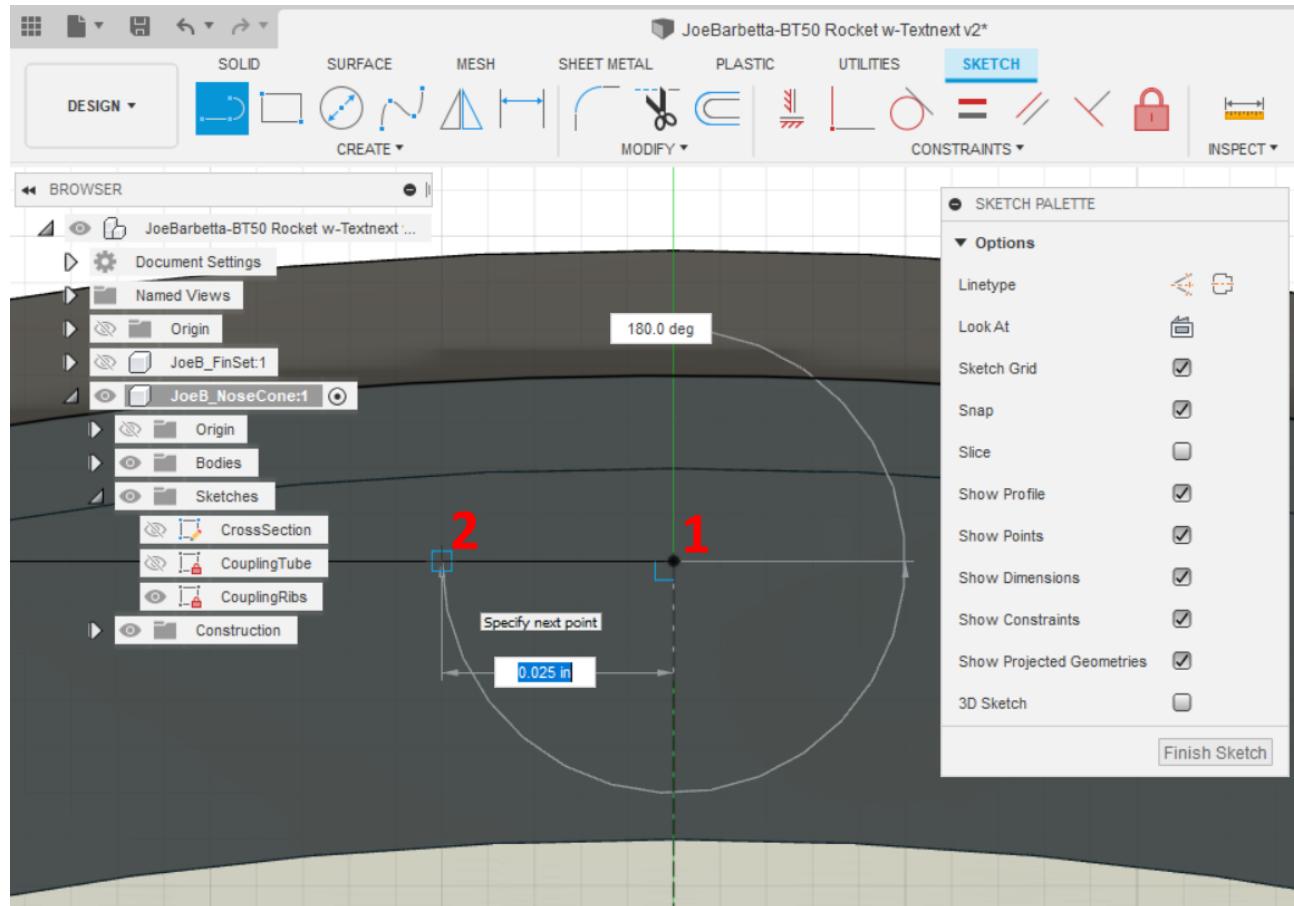


- create a Line from the last point at **1** up by **0.025** to **2** and then to the right by **0.050** to end at **3**

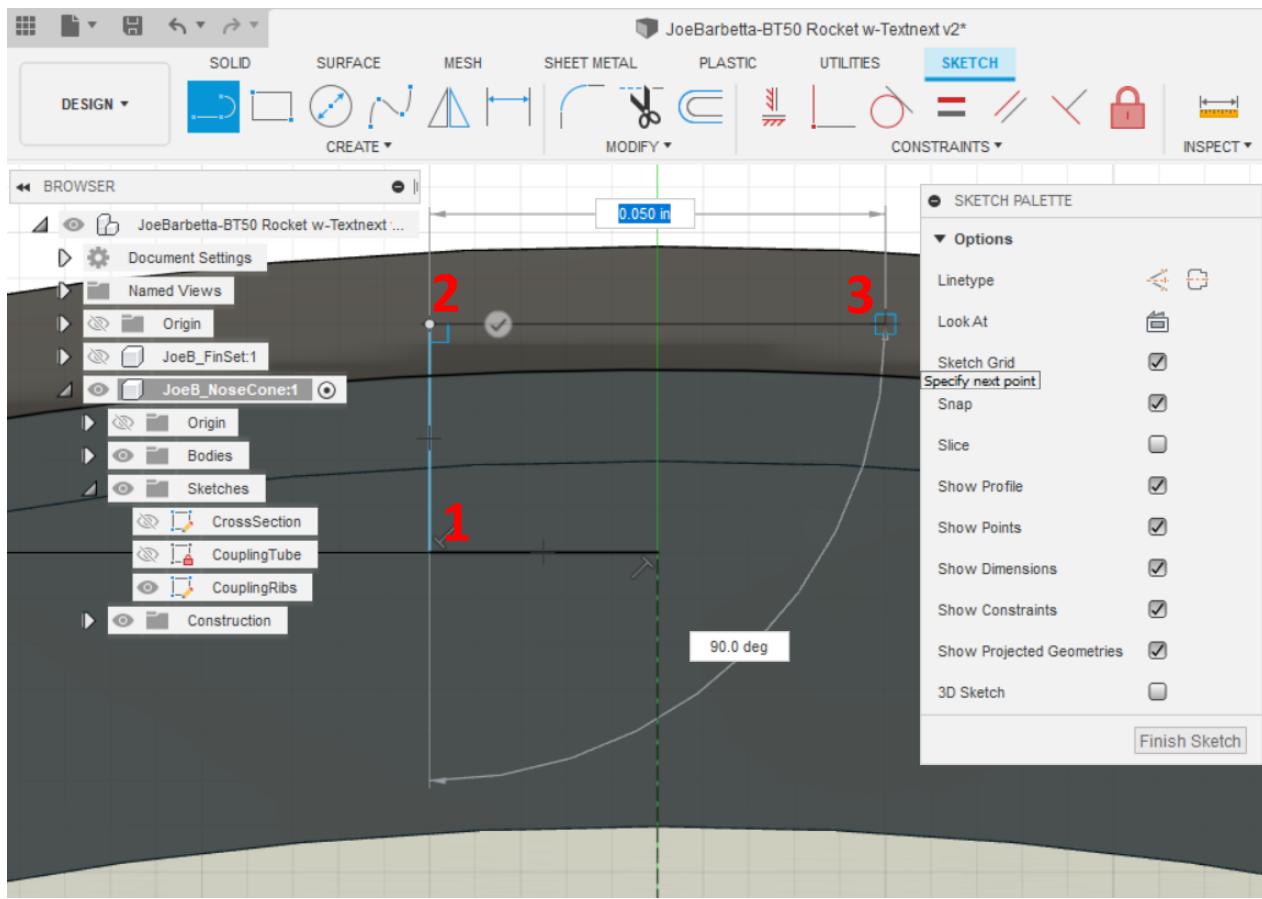


- create a Line from the last point at **1** down by **0.025** to **2** and then to the left by **0.050** to end at **3**

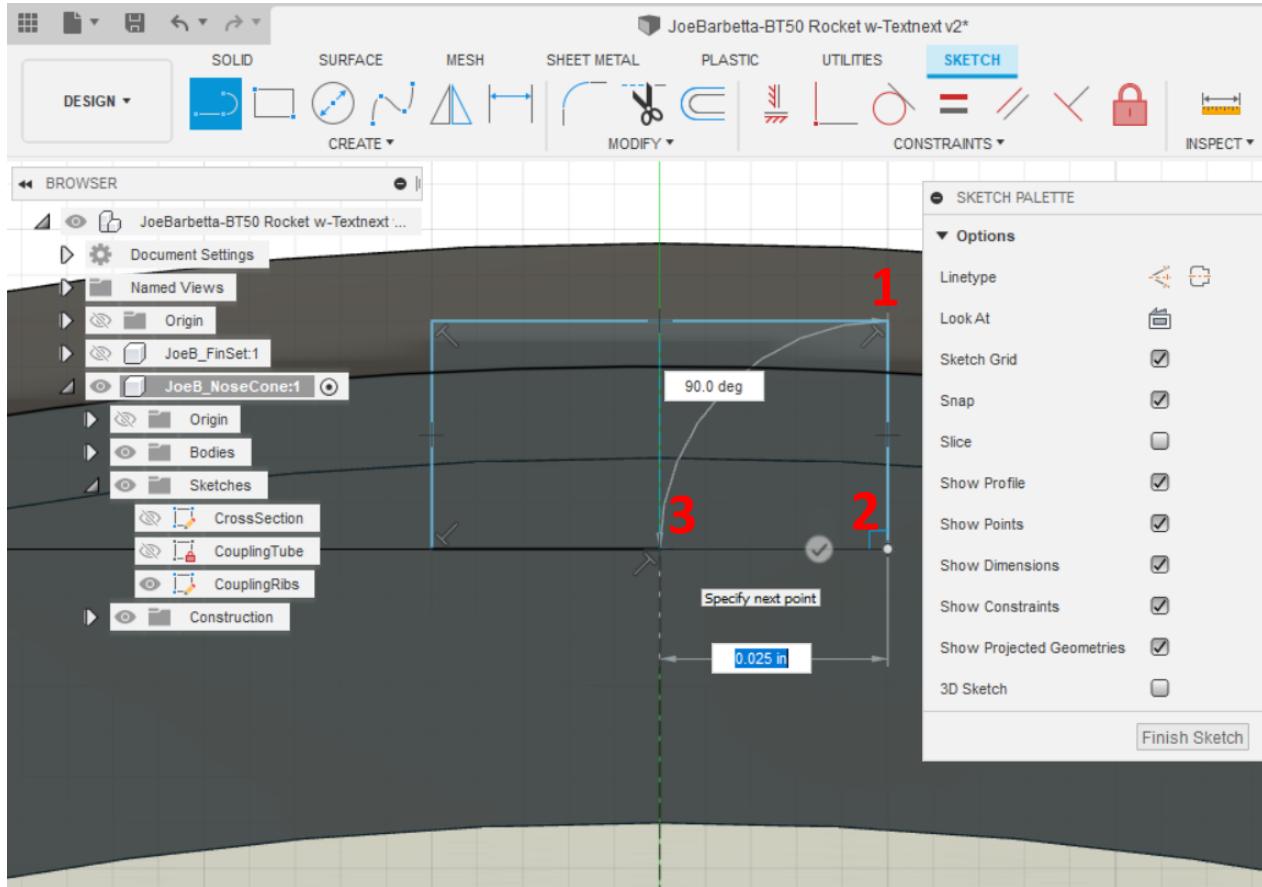


- select the **Trim** tool and click on the **arc** outside the rectangle and the **3 top segments** of the rectangle.

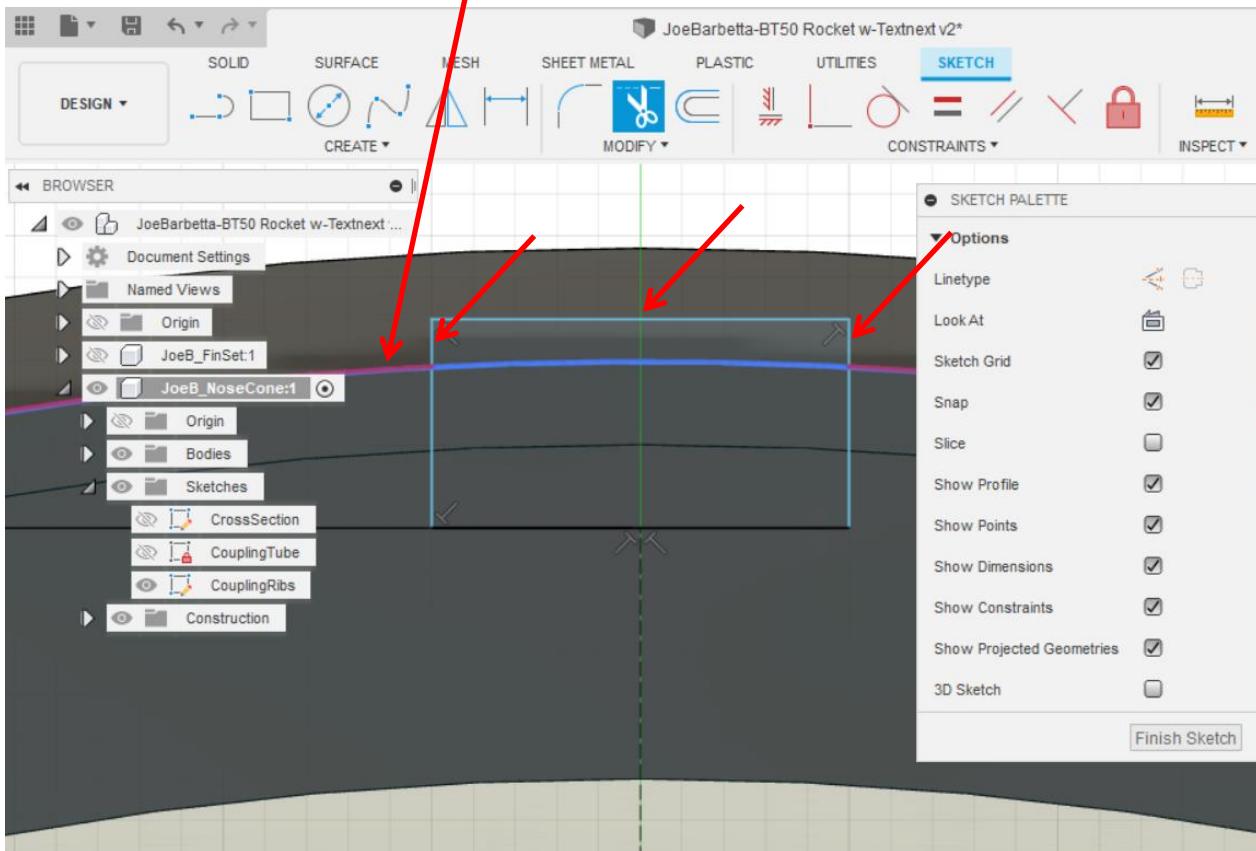


There should be a rectangle with a curved top as shown below.

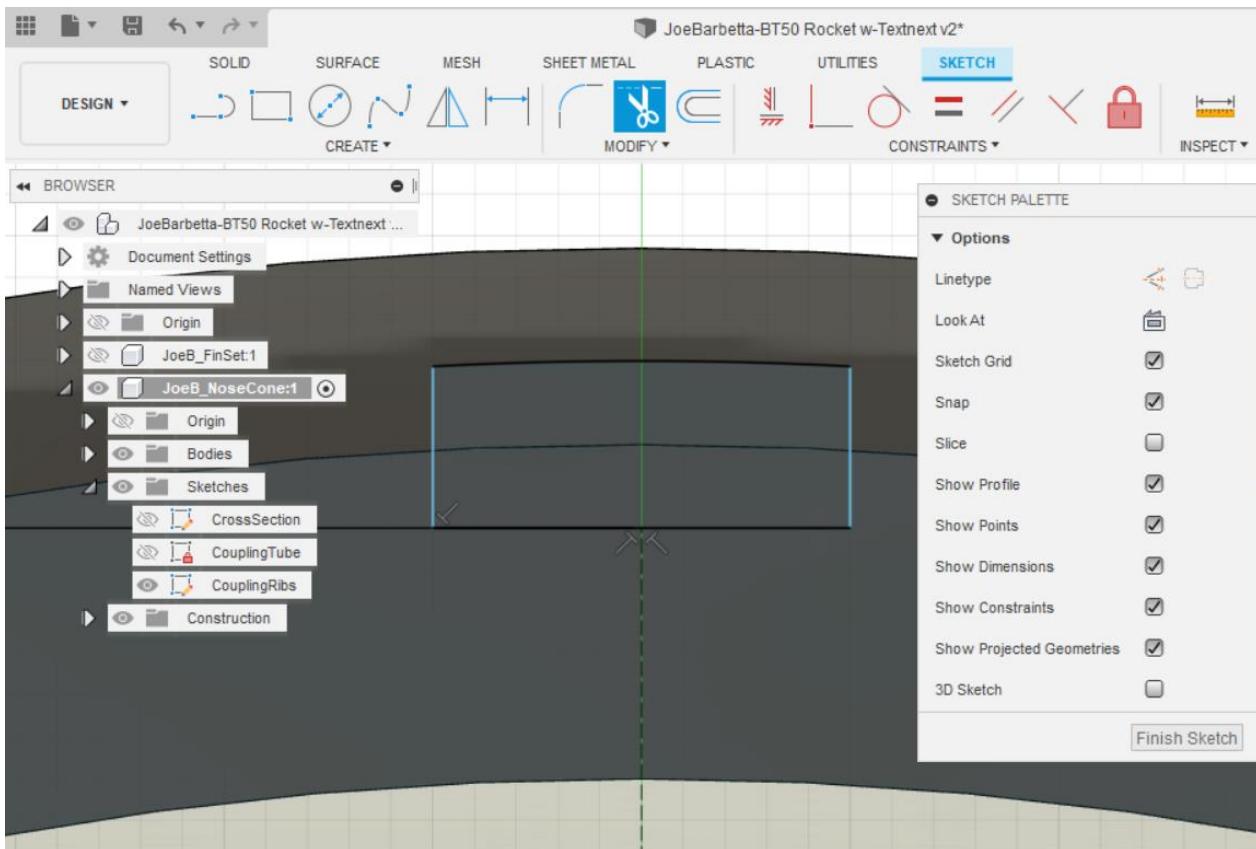

- zoom out and click on **CREATE** and select **Circular Pattern** near the bottom of the list.
- double-click on any edge of the rectangle. This should cause each edge to turn blue.
- enter 4 for the Quantity and click **OK**.

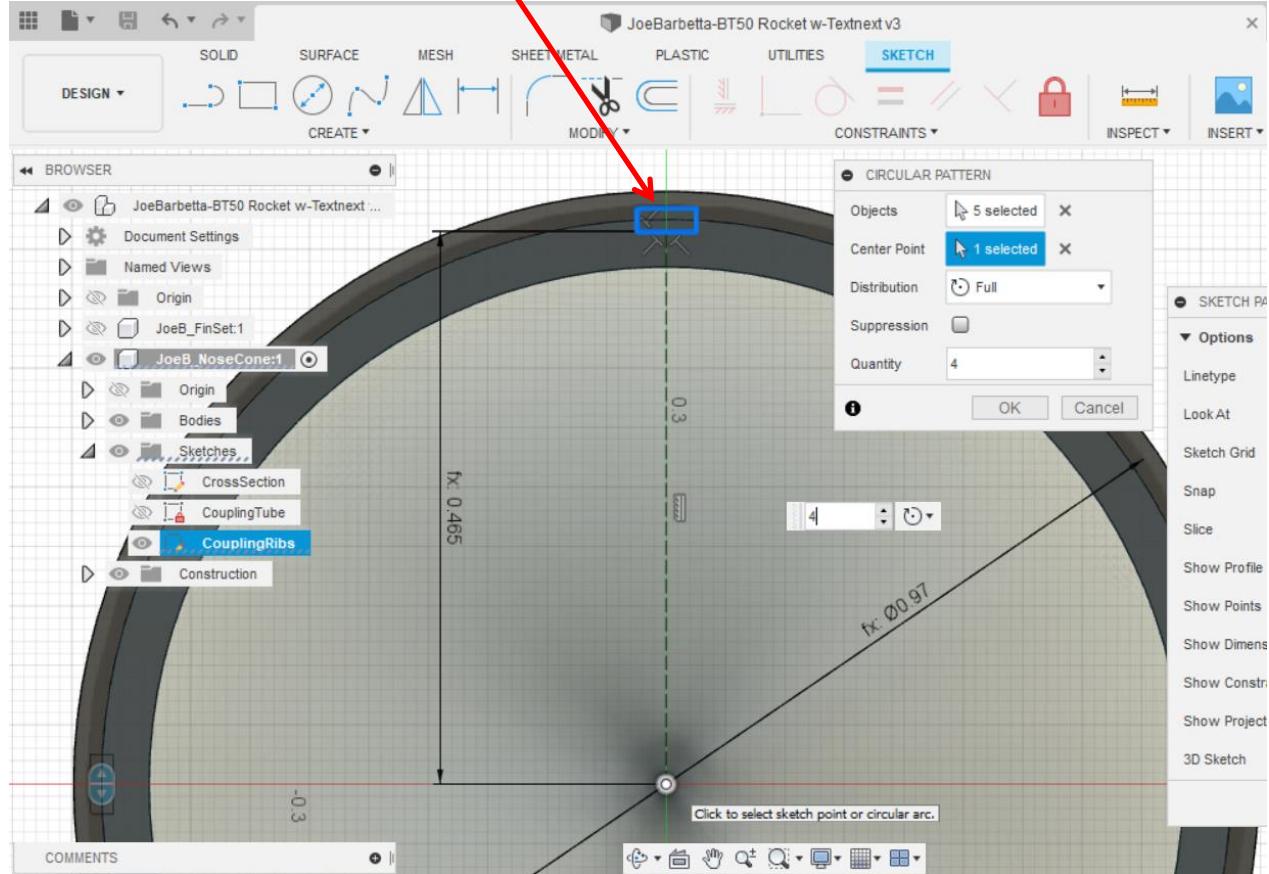


When zoomed out the 4 rectangles should be visible. Click **Finish Sketch**.

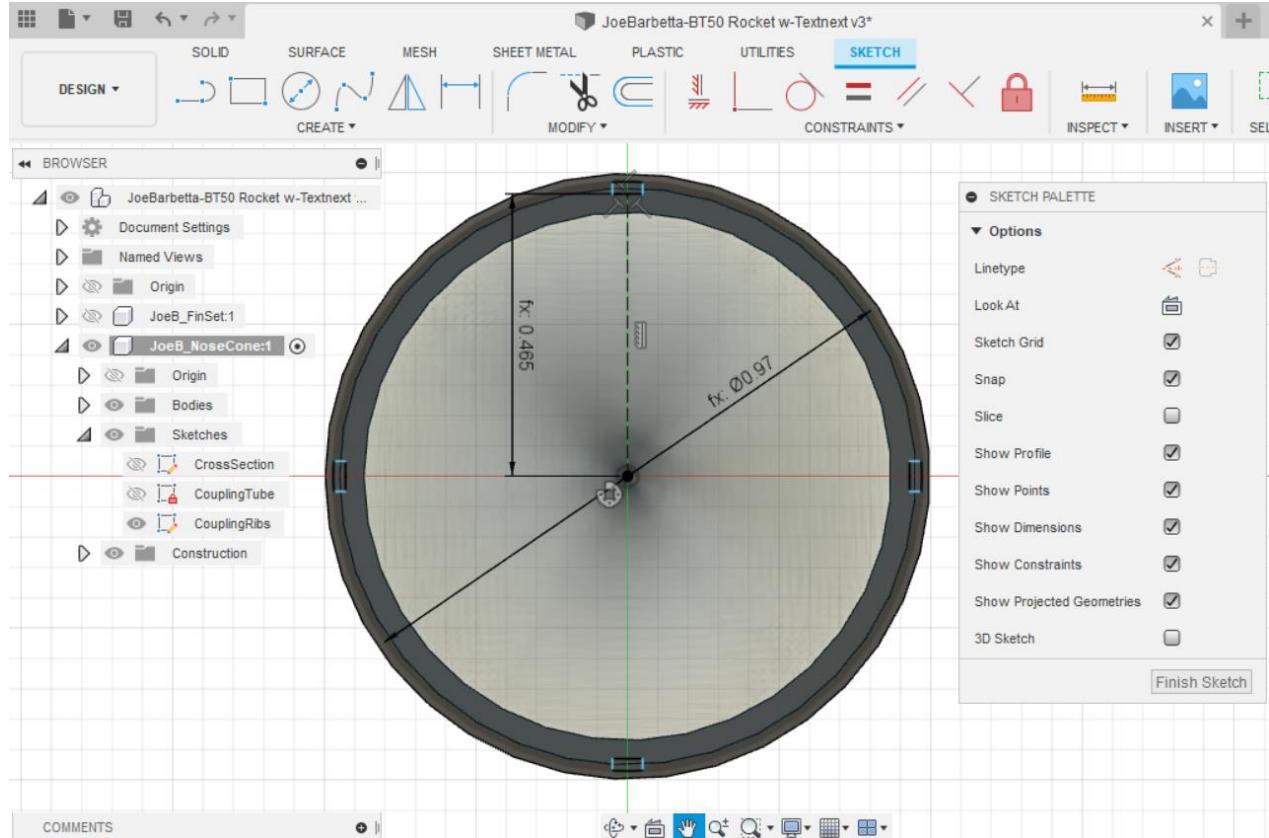


Here is another pain-in-the-butt operation that may require zooming in and out.

- click on the two regions making up each of the 4 rectangles and thus 8 regions will be clicked on in total. The closeup on the right shows how each rectangle should look.
- ensure that **Join** is selected for the **Operation**.
- click on somewhere on the **annular face** where the coupling tube meets the nose cone. Ribs will appear along the coupling.

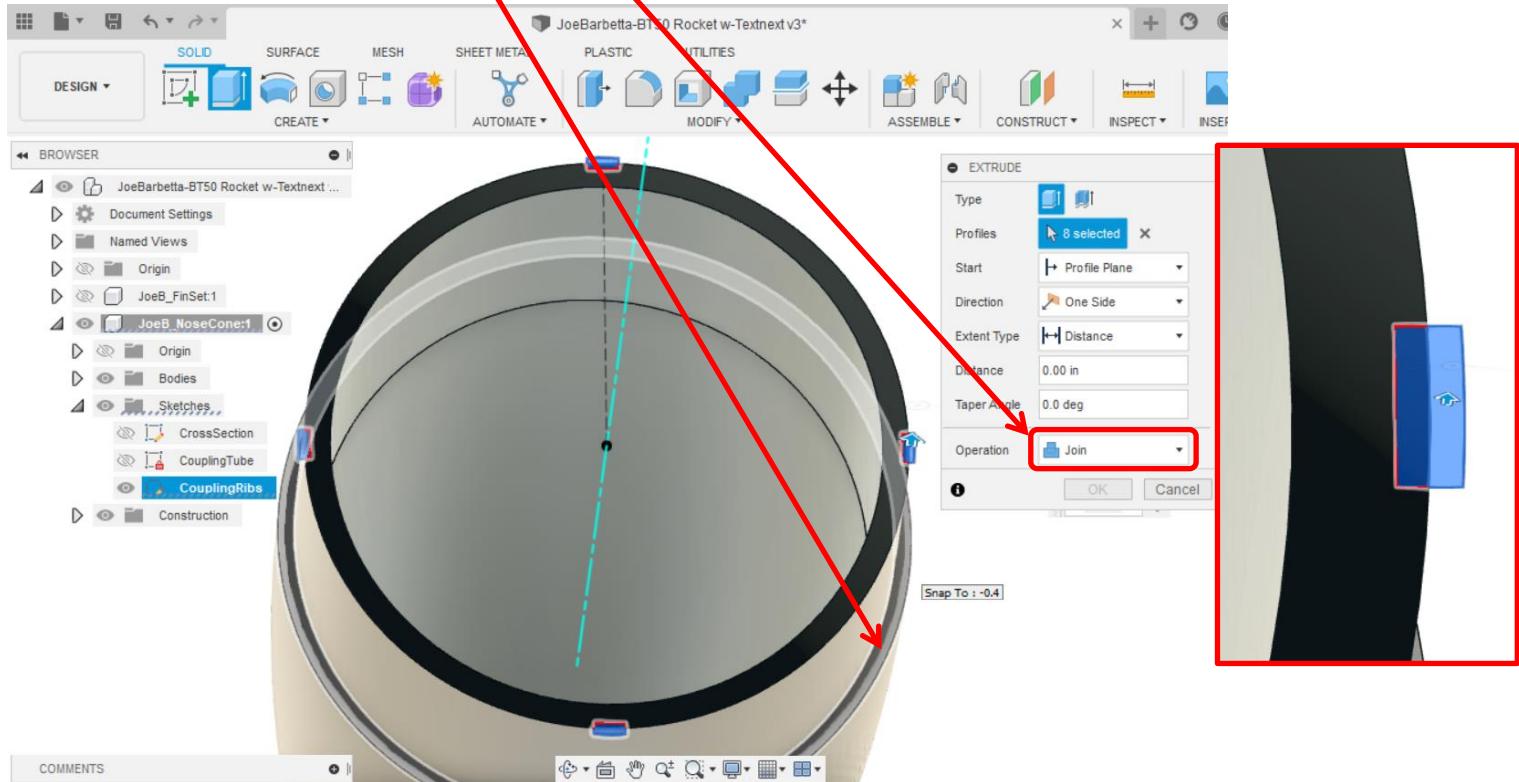


- click OK and the result should appear as below.

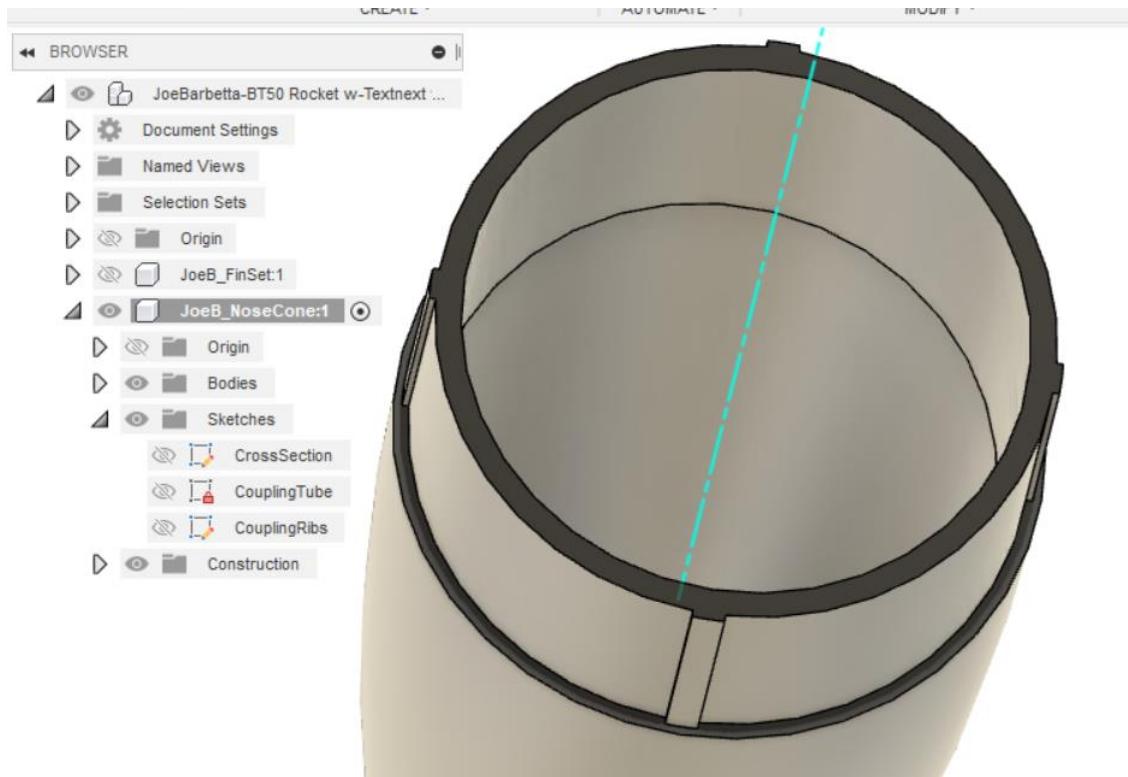


Now some chamfers will be added to make it easier to insert the nose cone in the body tube.

- click on **each of the 4 outer edges**.
- enter **0.015** and click **OK**. If an error appears, try smaller values.

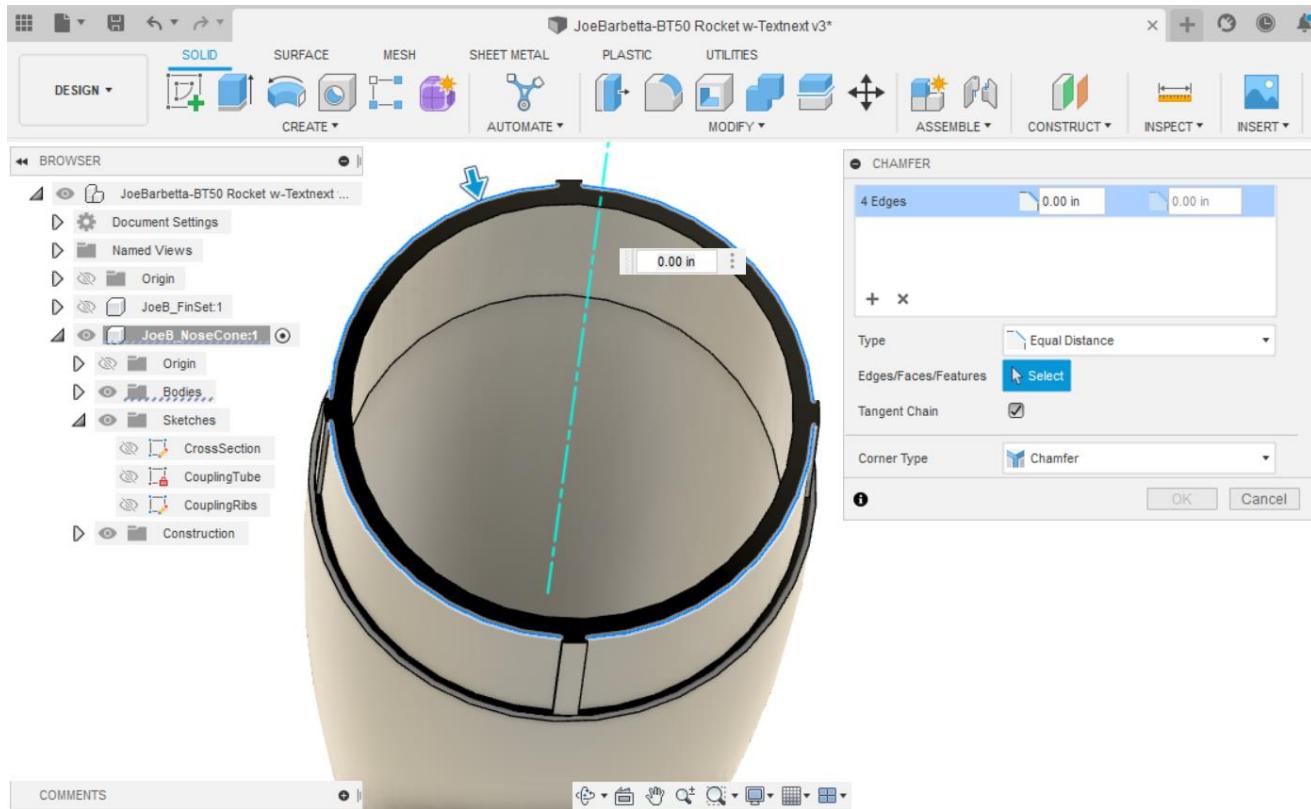


- click on the top **outer edge of the 4 ribs**.

- enter **0.015** and click **OK**. If an error appears, try smaller values.

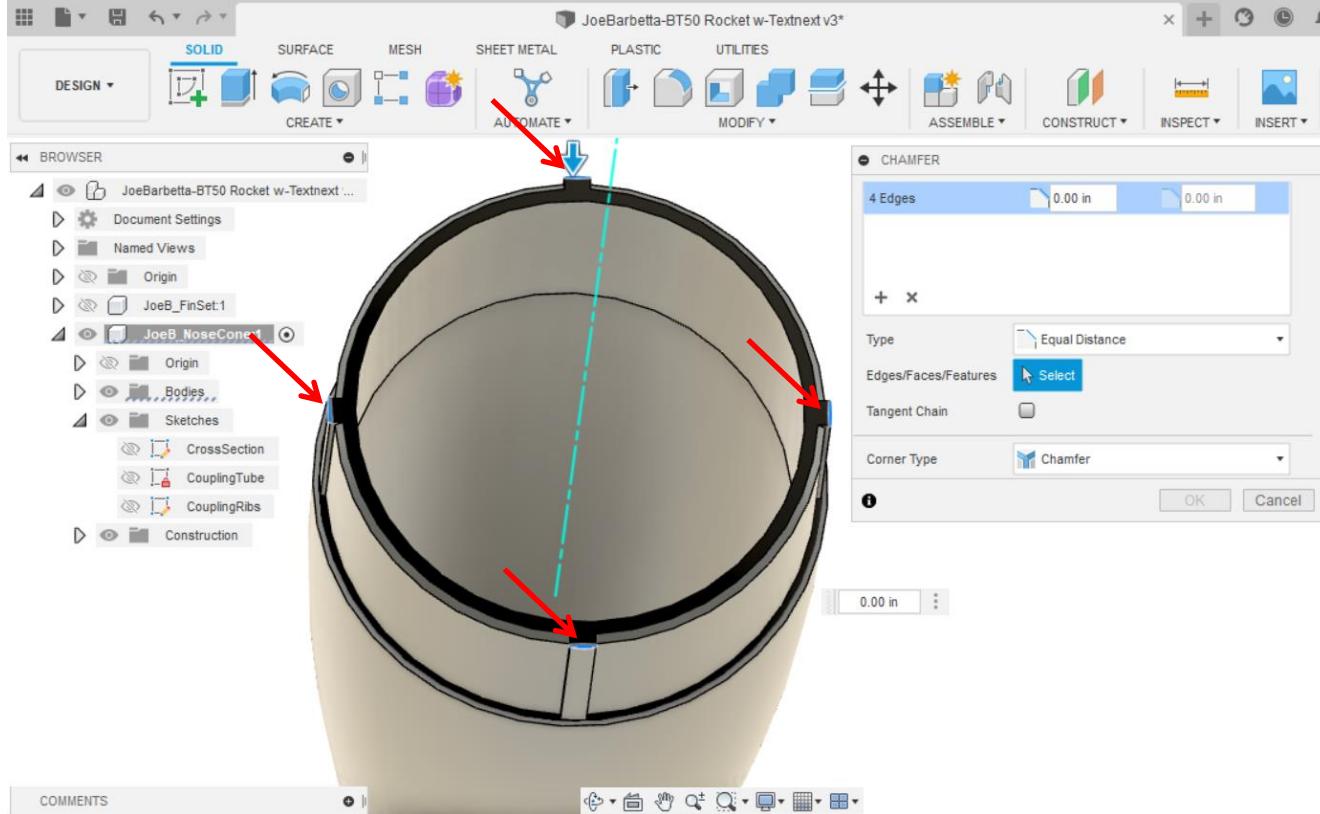


Because the nose cone will be printed when flipped 180 degrees compared to below it will start printing from what is now the top surface. When the print reaches the layer where the coupling tube meets the nose cone it will encounter an overhang. Adding a chamfer will allow adherence to the 45 degree rule.

- click on the **outer edge** as shown. Type **n** and select **Nose_CouplingChamfer** and click **OK**.

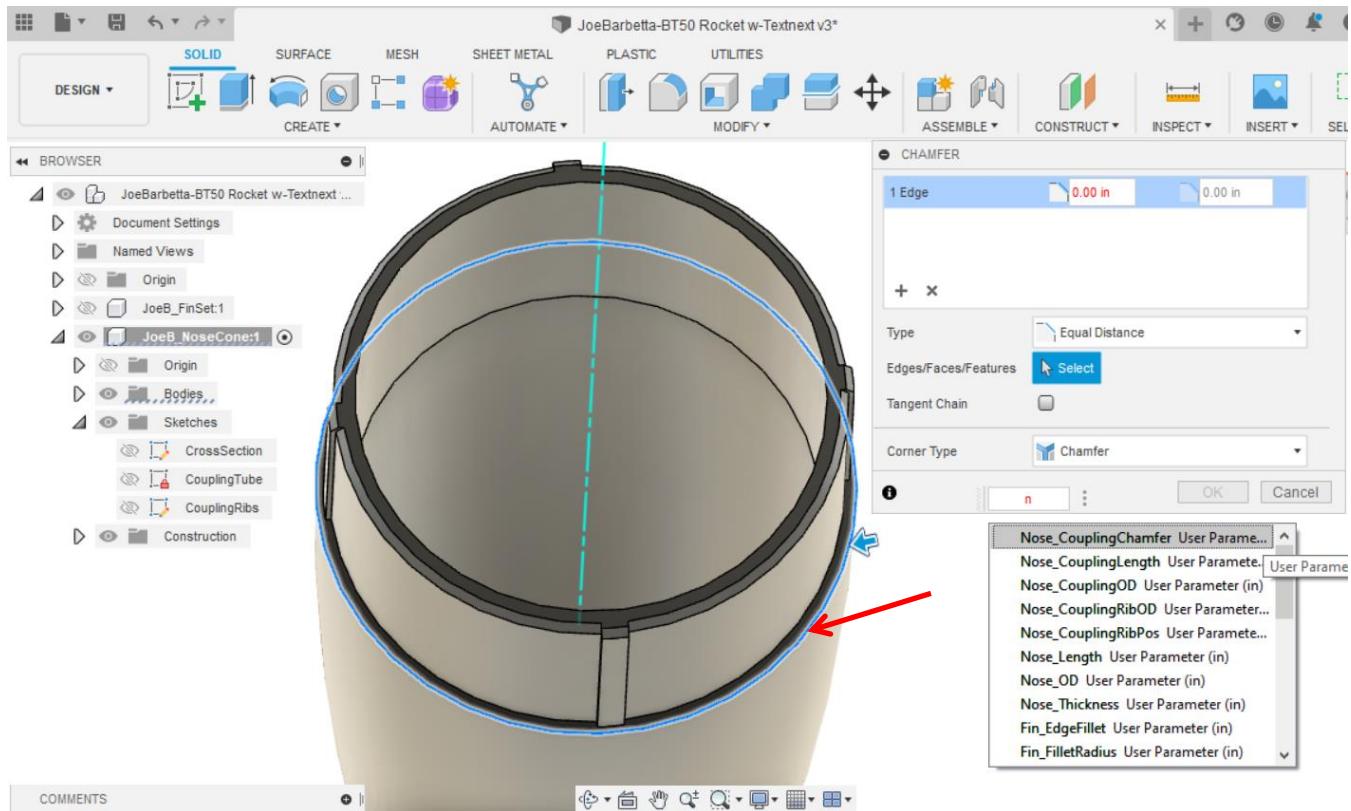


This is now how the side view looks. Note the 45 degree chamfer.

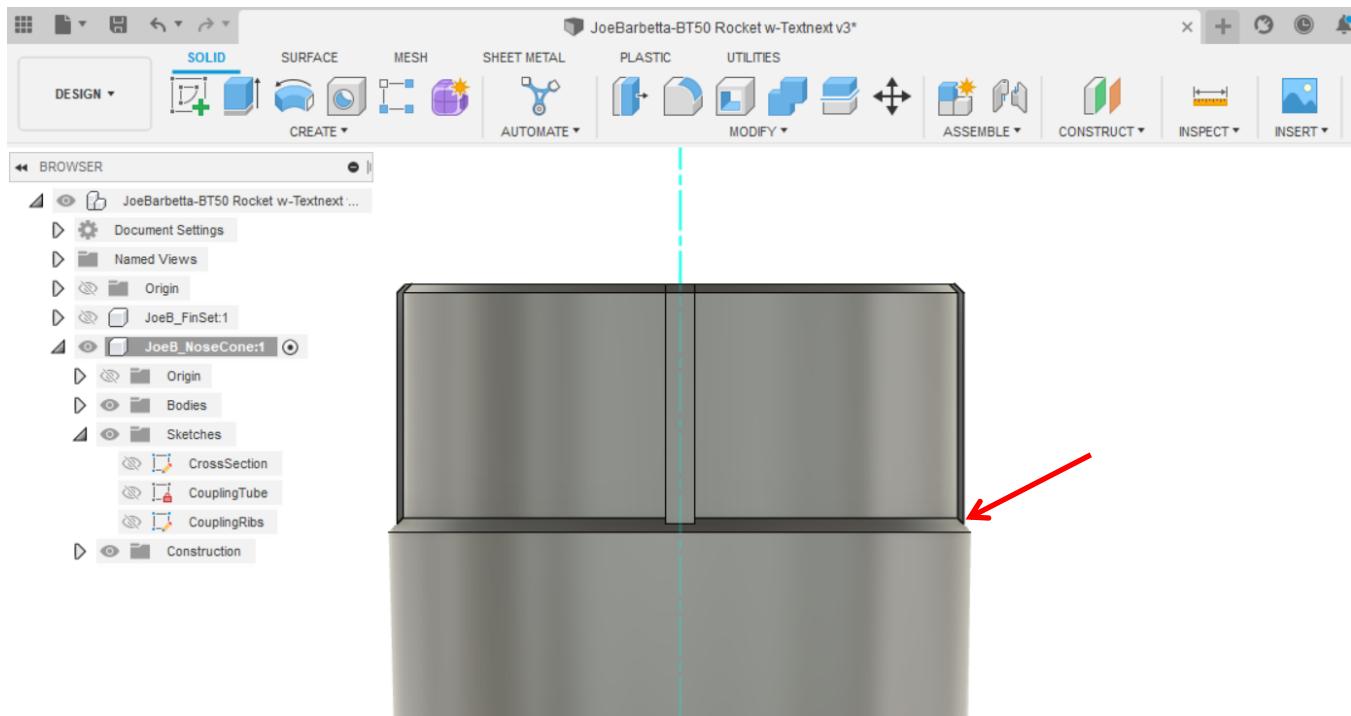

- right-click on the *Component* name and select **Physical Material** and drag the red icon onto the nose cone.

If you want a different color, you can first right-click on the icon and select **Duplicate** and then right-click on the new icon and select **Edit**. The instructions in “Setting Materials and Colors” can be followed to pick a new color. This new icon can then be dragged onto the nose cone.

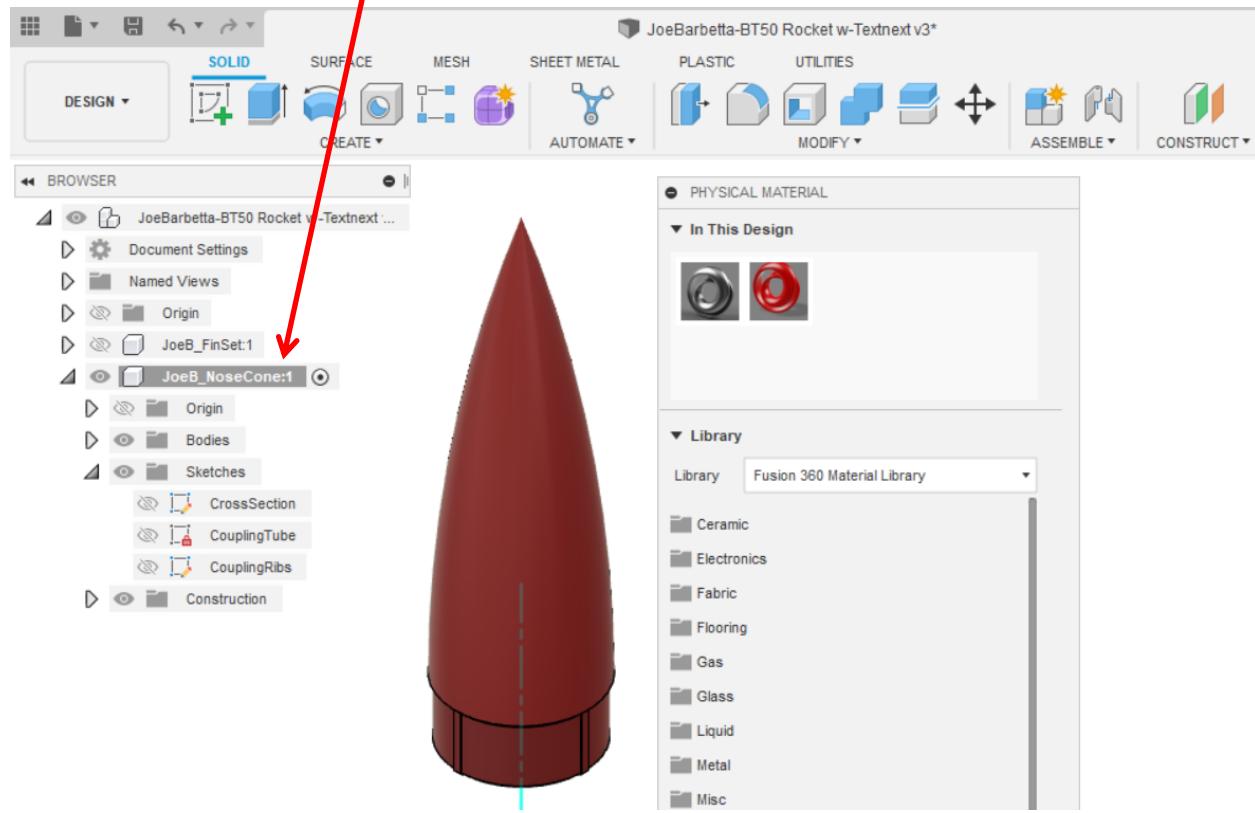

Adding Text to a Curved Surface


One can only select a flat surface of an object to start a Sketch and if it is desired to add text to a curved surface a new **Construction Plane** must be created.

Our nose cone already has an axis, but if it didn't one would use the Axis Through Cylinder/Cone/Torus under CONSTRUCT to create one. We will use the one we have already.


- select **Plane at Angle** under **CONSTRUCT** and click on the **blue axis**. We can keep the default value of 0.0 deg and click **OK**.

A yellow **Plane** should appear as below.


- select **Sketch** and click on the **yellow Plane**

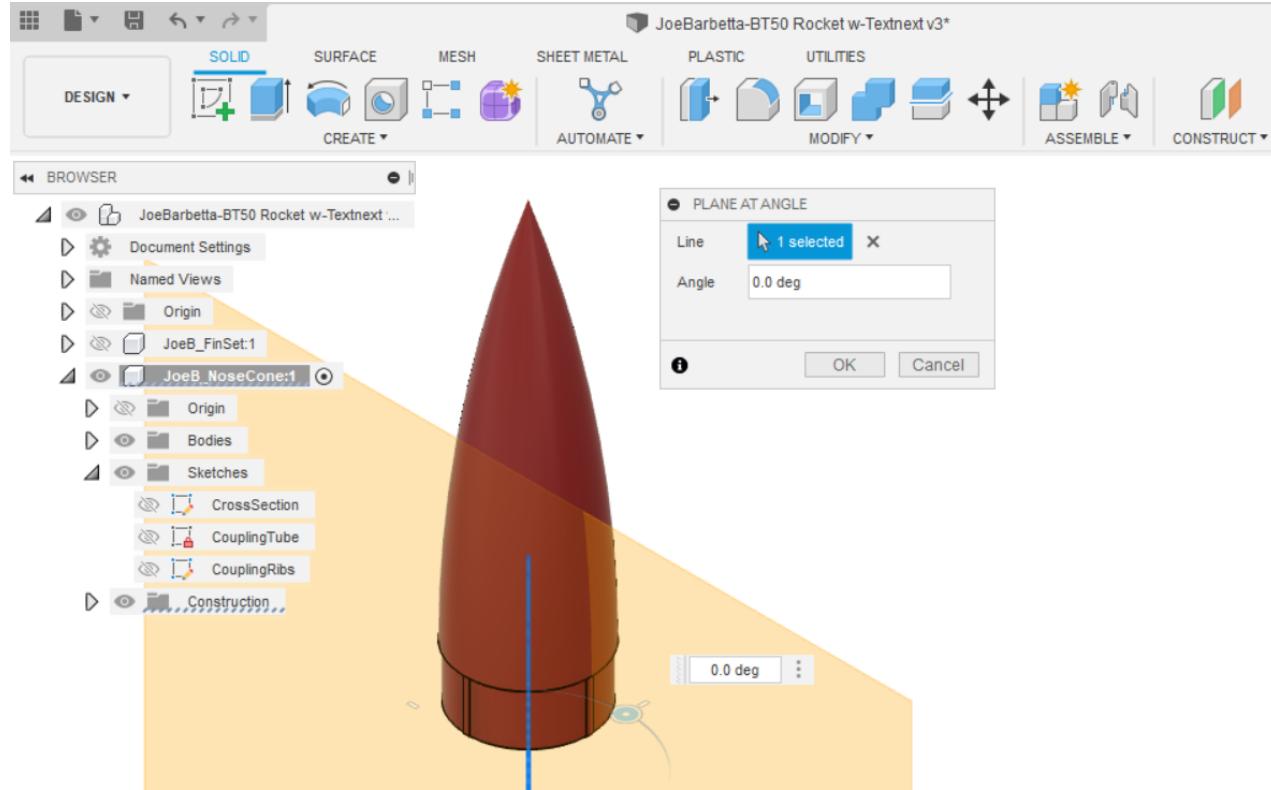


If text orientation along the axis is desired, click on a blue curved arrow that appears when hovering over the View Cube.

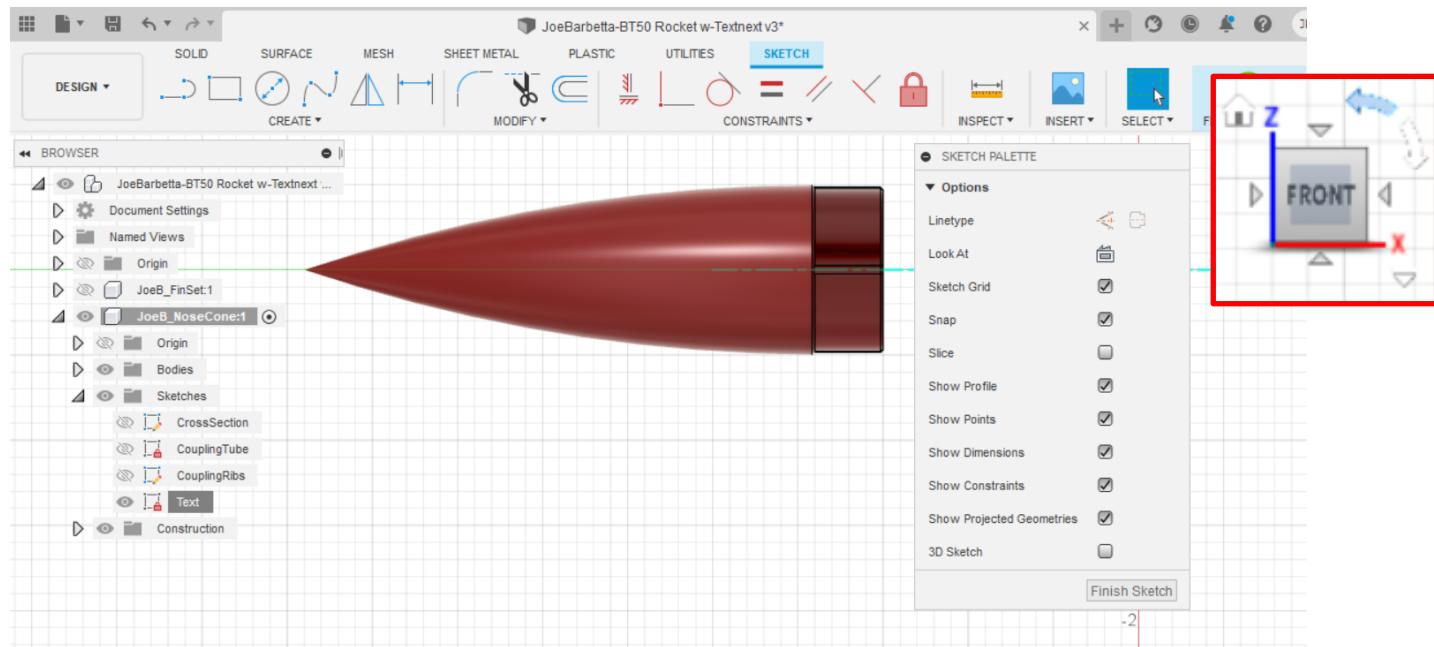


- select **Text** in the **CREATE** menu and specify a rectangular region for the text by clicking on the locations for two opposite corners.

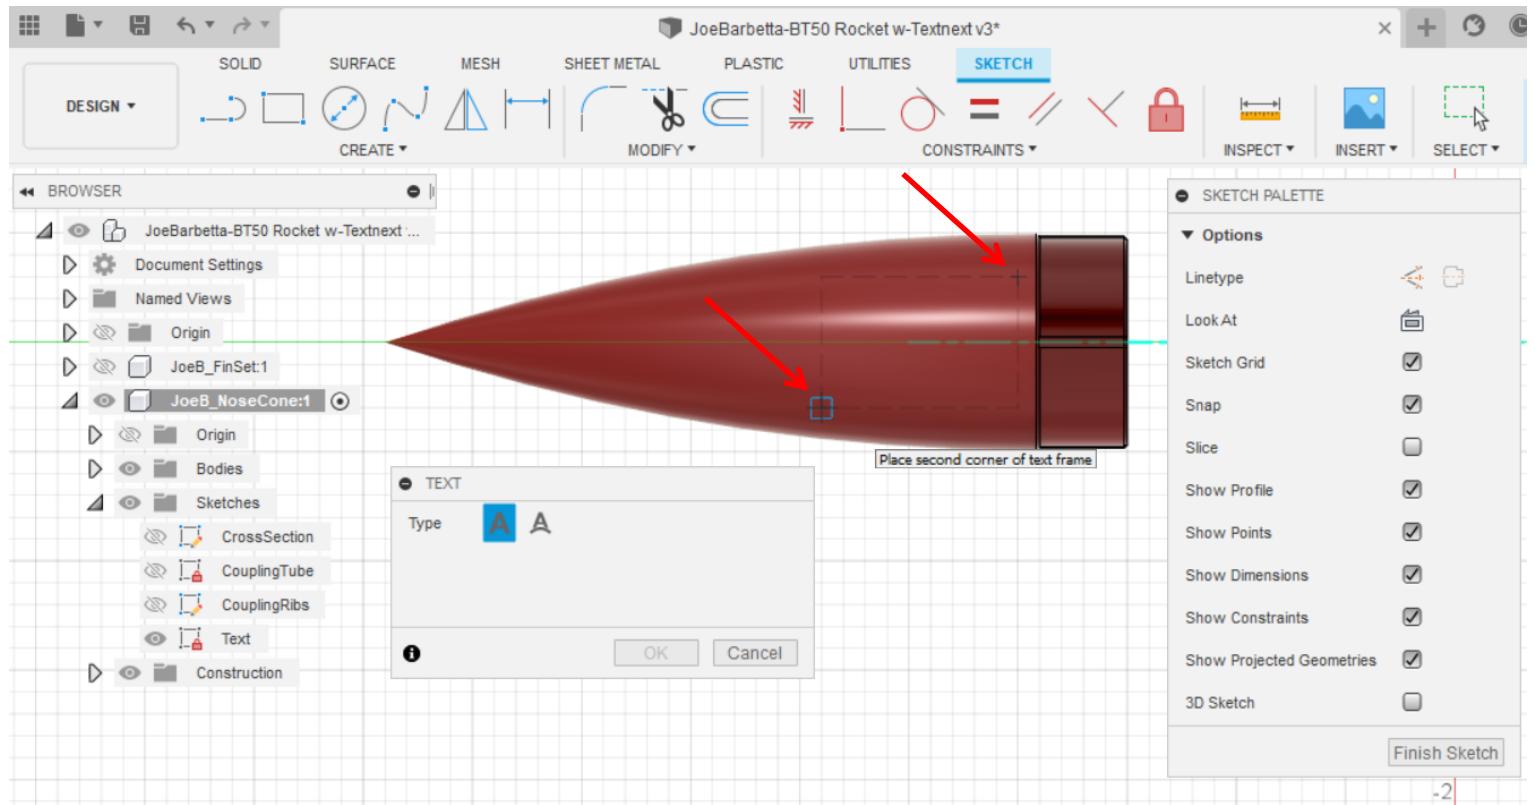

- enter the desired text in **Text**. If the text is too large or too small change the **Height** until the desired size is attained.
- one can also change the **Font** and make the **Typeface bold** or **italic**
- one can also click on **Alignment** options to center the text horizontally and vertically
- the text can also be mirrored by using a **Flip** option
- click on **OK** and then **Finish Sketch**

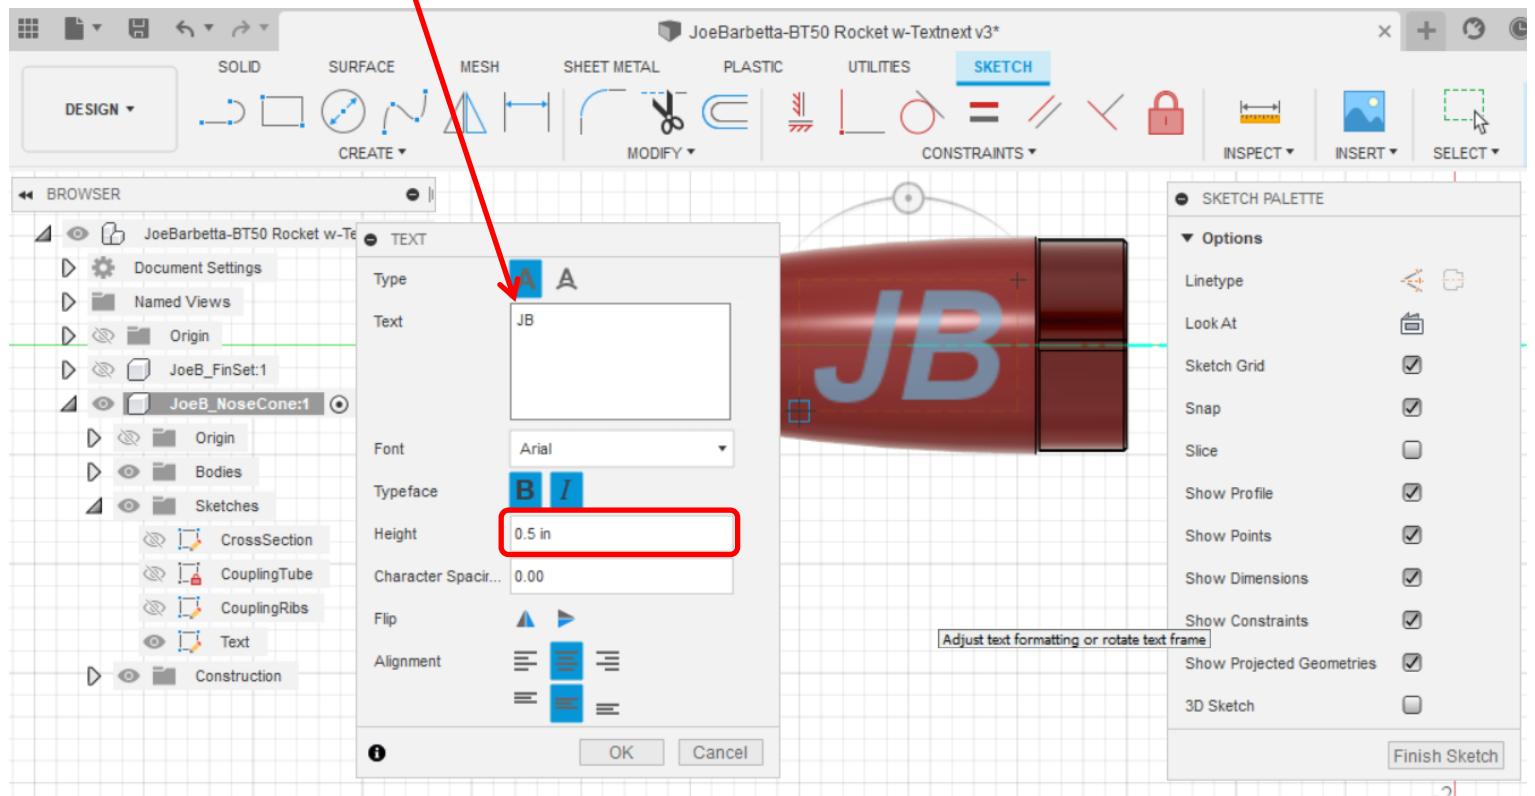


- right-click on the text and select **Create Selection Set**.

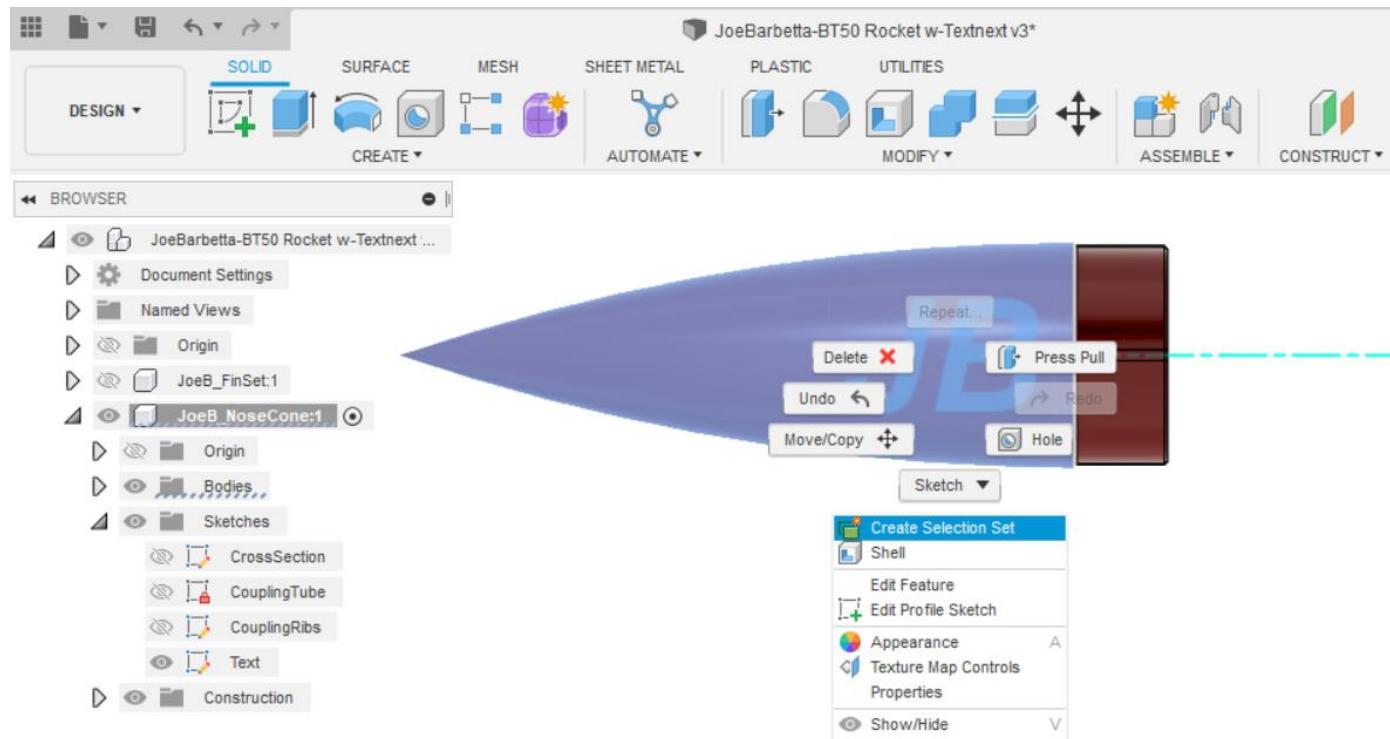


- select the **Extrude** tool and **click on the text**.

- next to Start select **Object**. Note that next to **Profiles** it should show **1 selected**.


- ensure that **Join** is selected next to **Operation**.

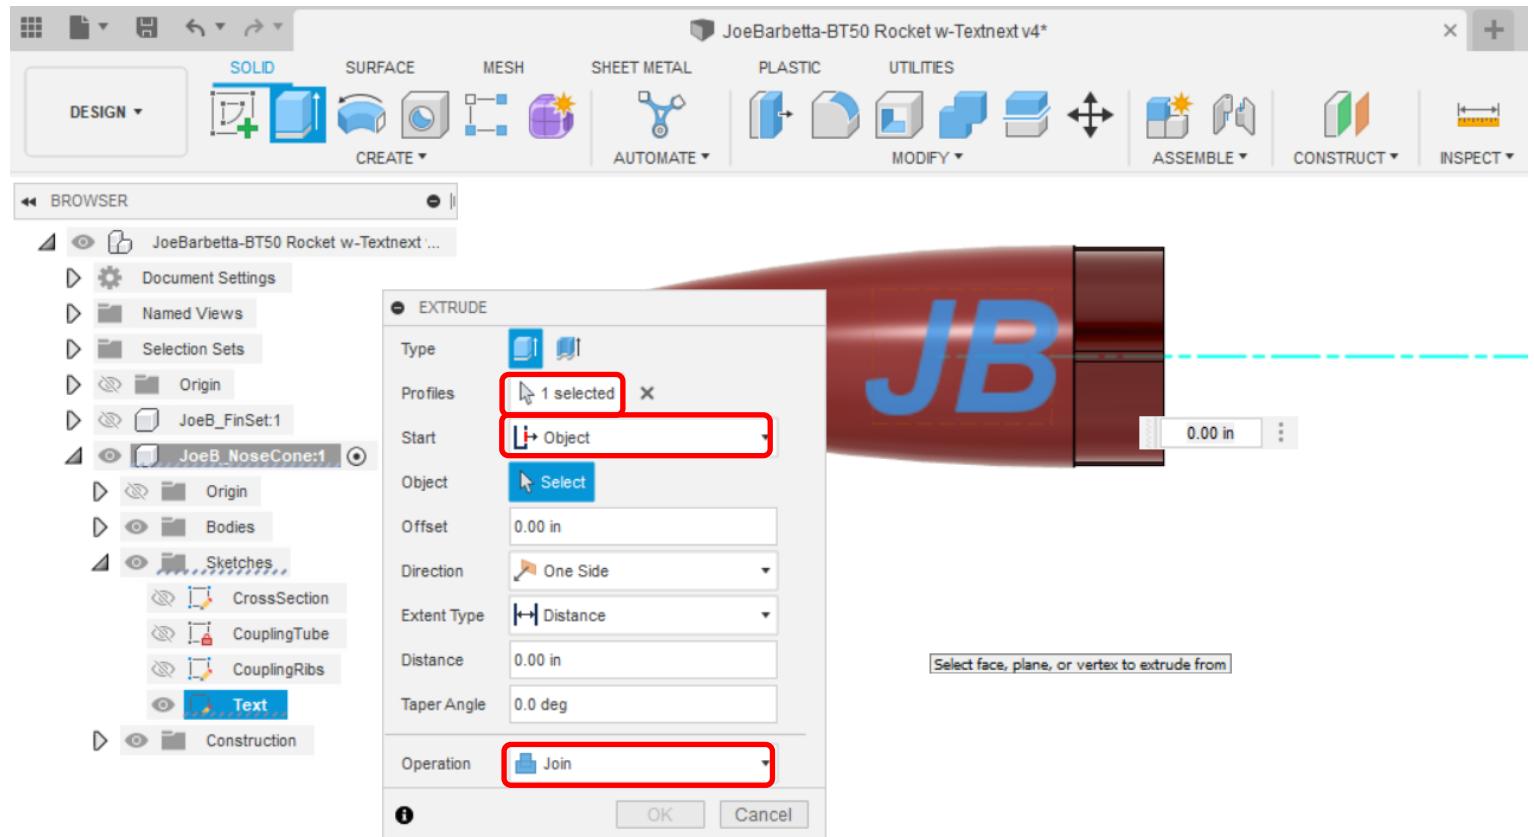

- click on the Nose Cone, enter **0.015**, and click OK. The text should now stand out.

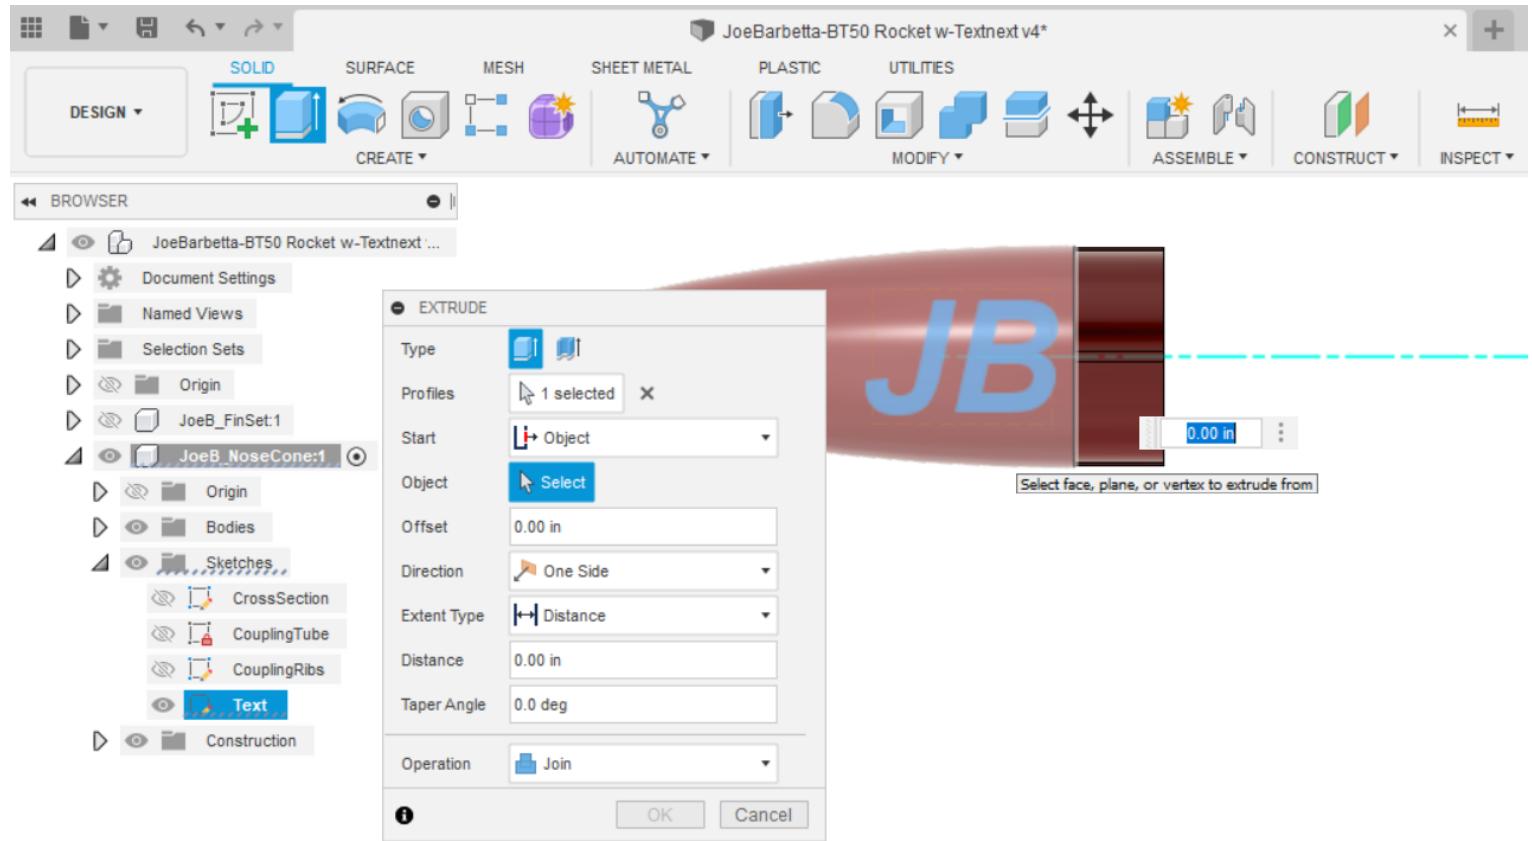


- rotate the view to look inside the nose cone. Text should only appear on the outside surface. There should be nothing inside the nose cone. If there is material for the text inside, use Undo and revisit the previous Extrude operation settings.

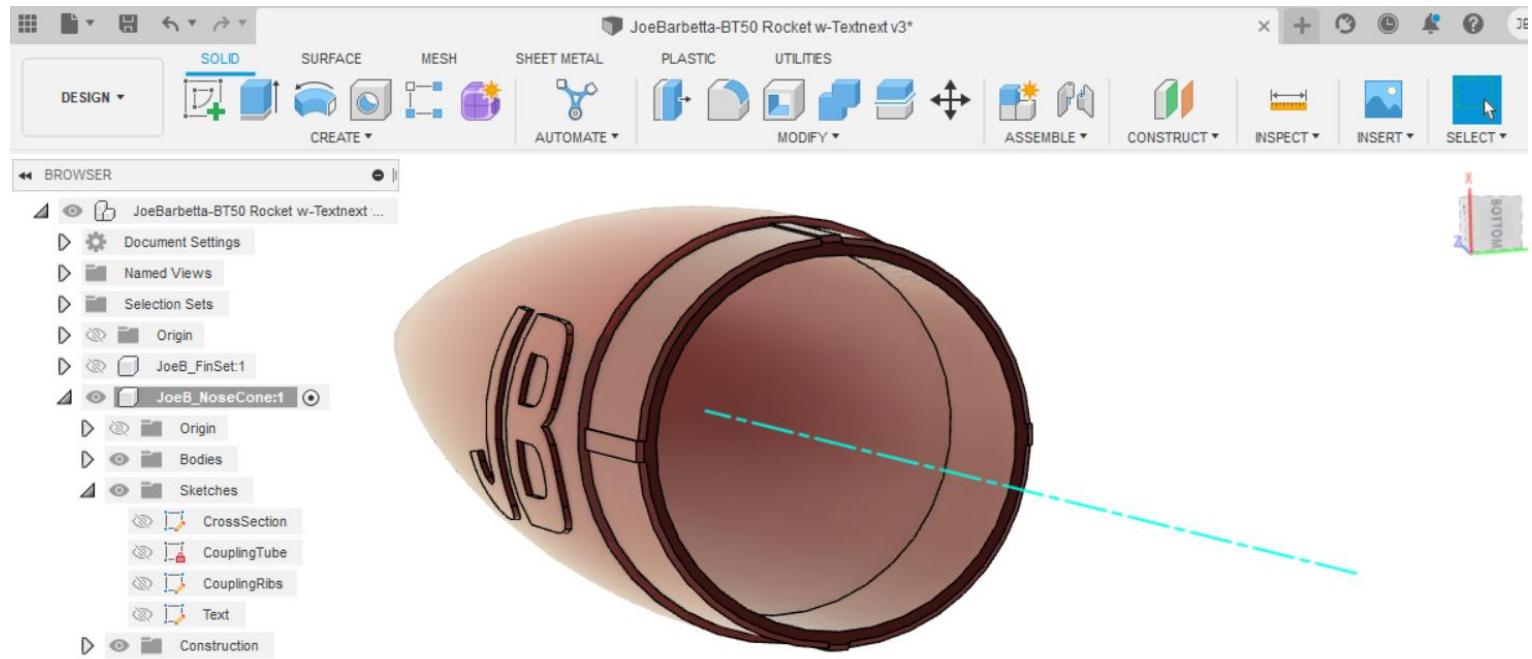


- adjust the view similar to that below
- within the **MODIFY** menu select **Chamfer** and ensure that **Type** is set to **Equal Distance**.
- click on the **outer edge** of the Nose Cone, type **n**, and select **Nose_CouplingChamfer** and click **OK**

This is needed because the Nose Cone will print from the bottom and the chamfer eliminates the overhang.

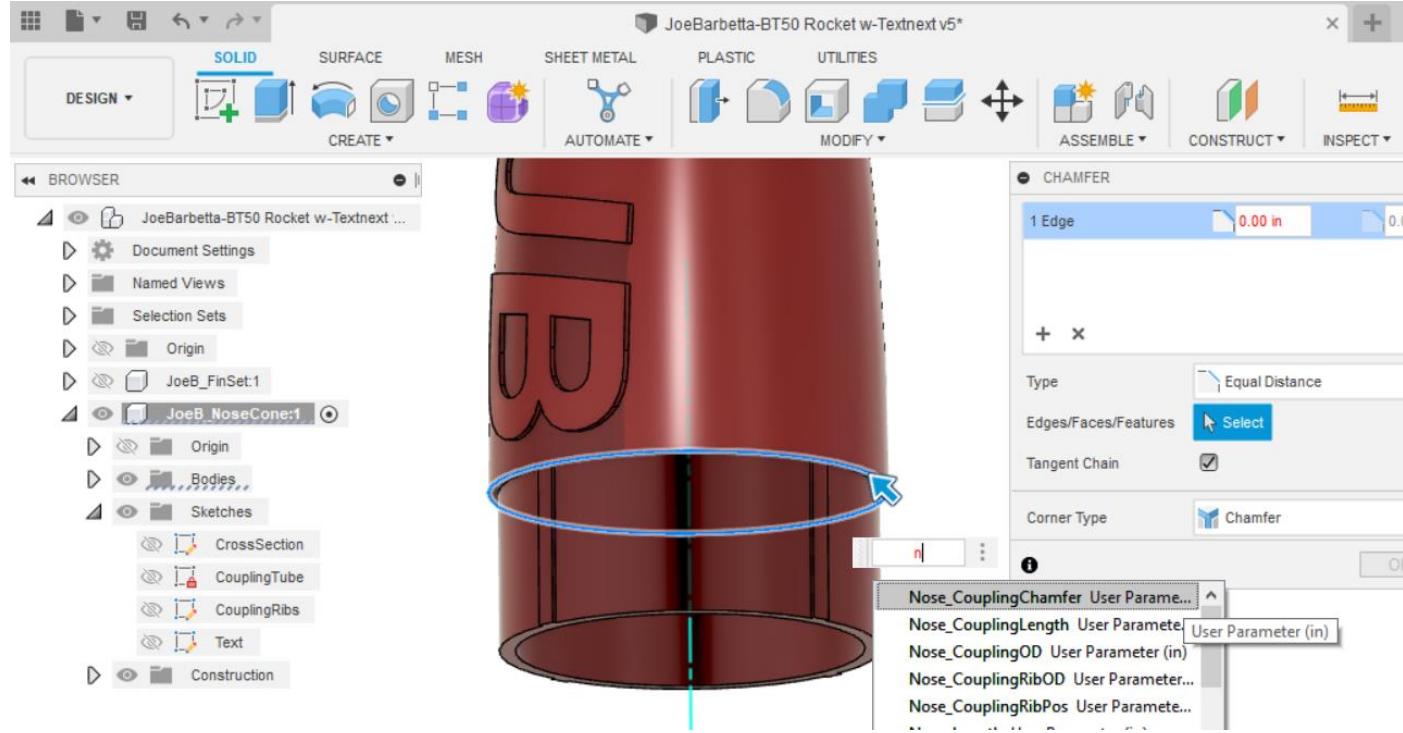

- click on the **Home** icon at the top-left of the **View Cube**. This will reset the view.
- right-click on the **Project Name** and select **Activate** to see both the FinSet and NoseCone Components

Our rocket looks a little short. However, this is all that's needed to 3D print these components.

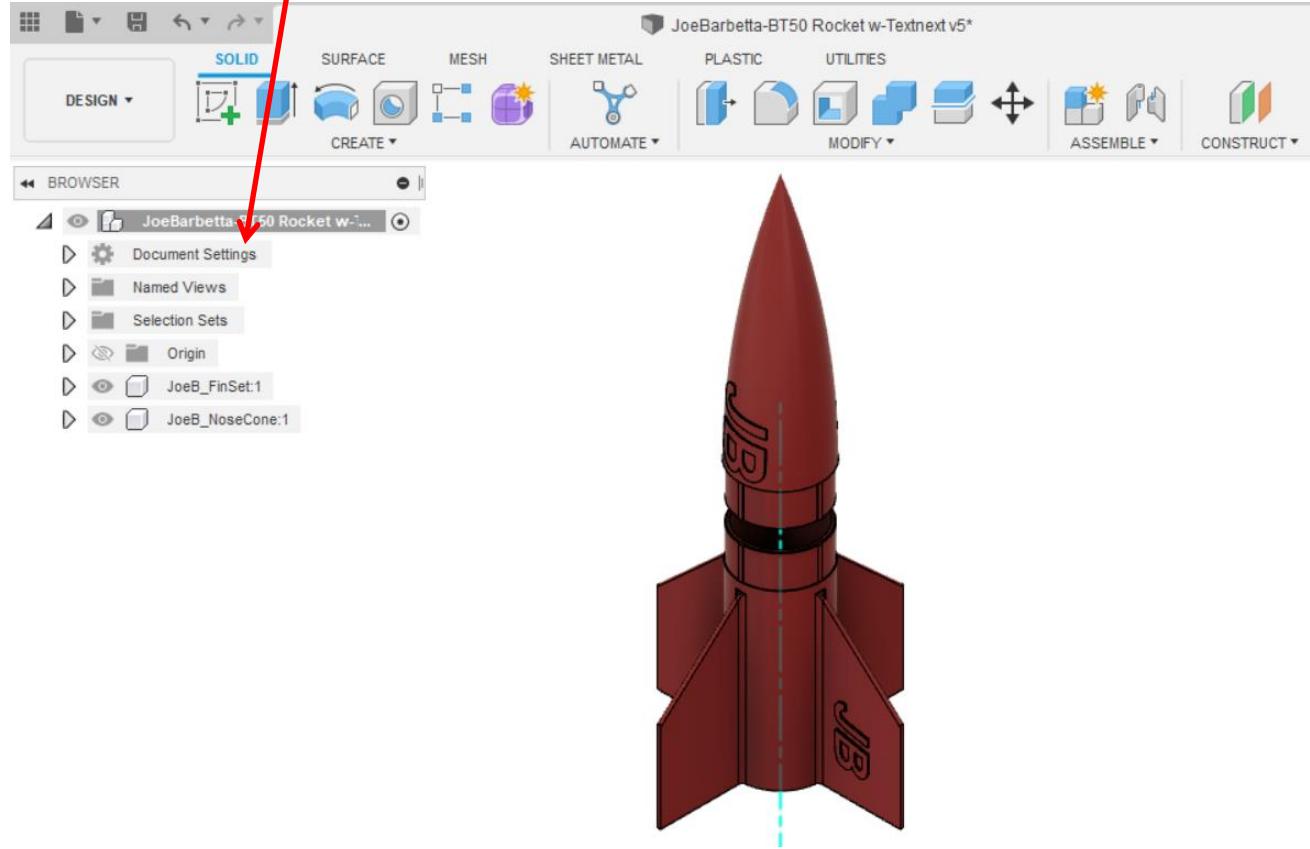

Using a Joint

Fusion 360 allows one to create **Joints** to control the positions of objects. These positions can be controlled by *Parameters* or controlled dynamically for animated movements.


Because a Joint will be used to position the Nose Cone at a distance from the Fin Set to accommodate the Body Tube, create the following Parameters for the Body Tube.

As done previously, open the *Parameters window* and add additional parameters.


- from the top **MODIFY** menu select **Change Parameters** near the bottom of the list
- next to **User Parameters** click on + and enter the **Name** and **Expression** for each item in the below list. Note that you will need to click + for each item. You may be able to copy and paste Expressions, but **if it shows as red you may have to type the expression.**
- **Don't forget to click OK when done!**

Name	Expression
BodyTube_OD	0.977
BodyTube_Thickness	0.013
BodyTube_Length	9.000

- within the **ASSEMBLE** menu select **Joint**
- click on the **outer edge** of the Nose Cone

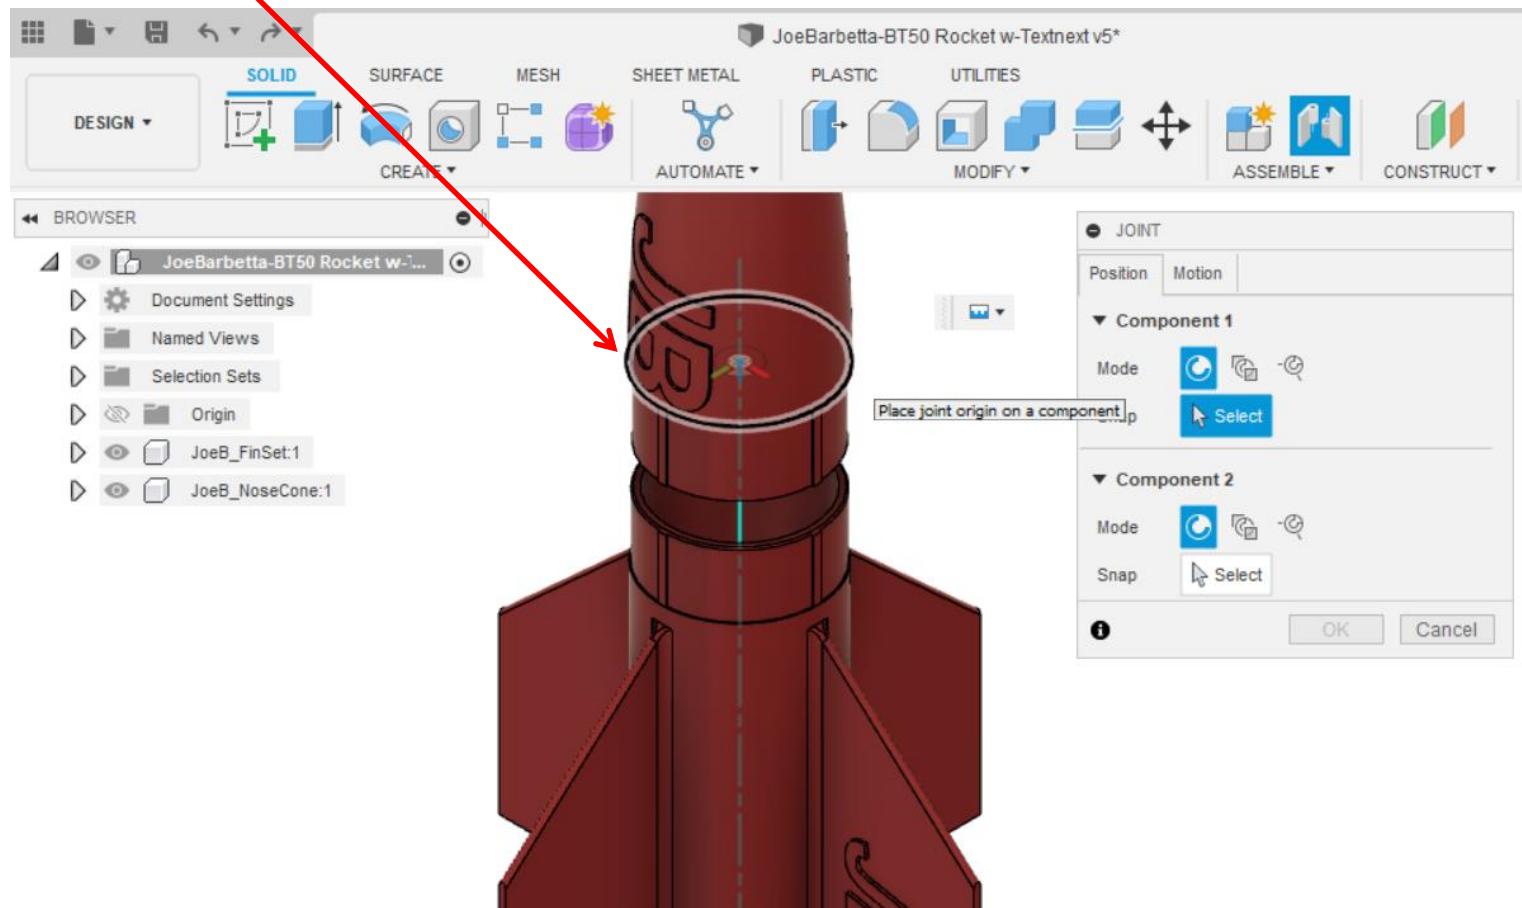


- click on the **outer edge** of the Fin Set

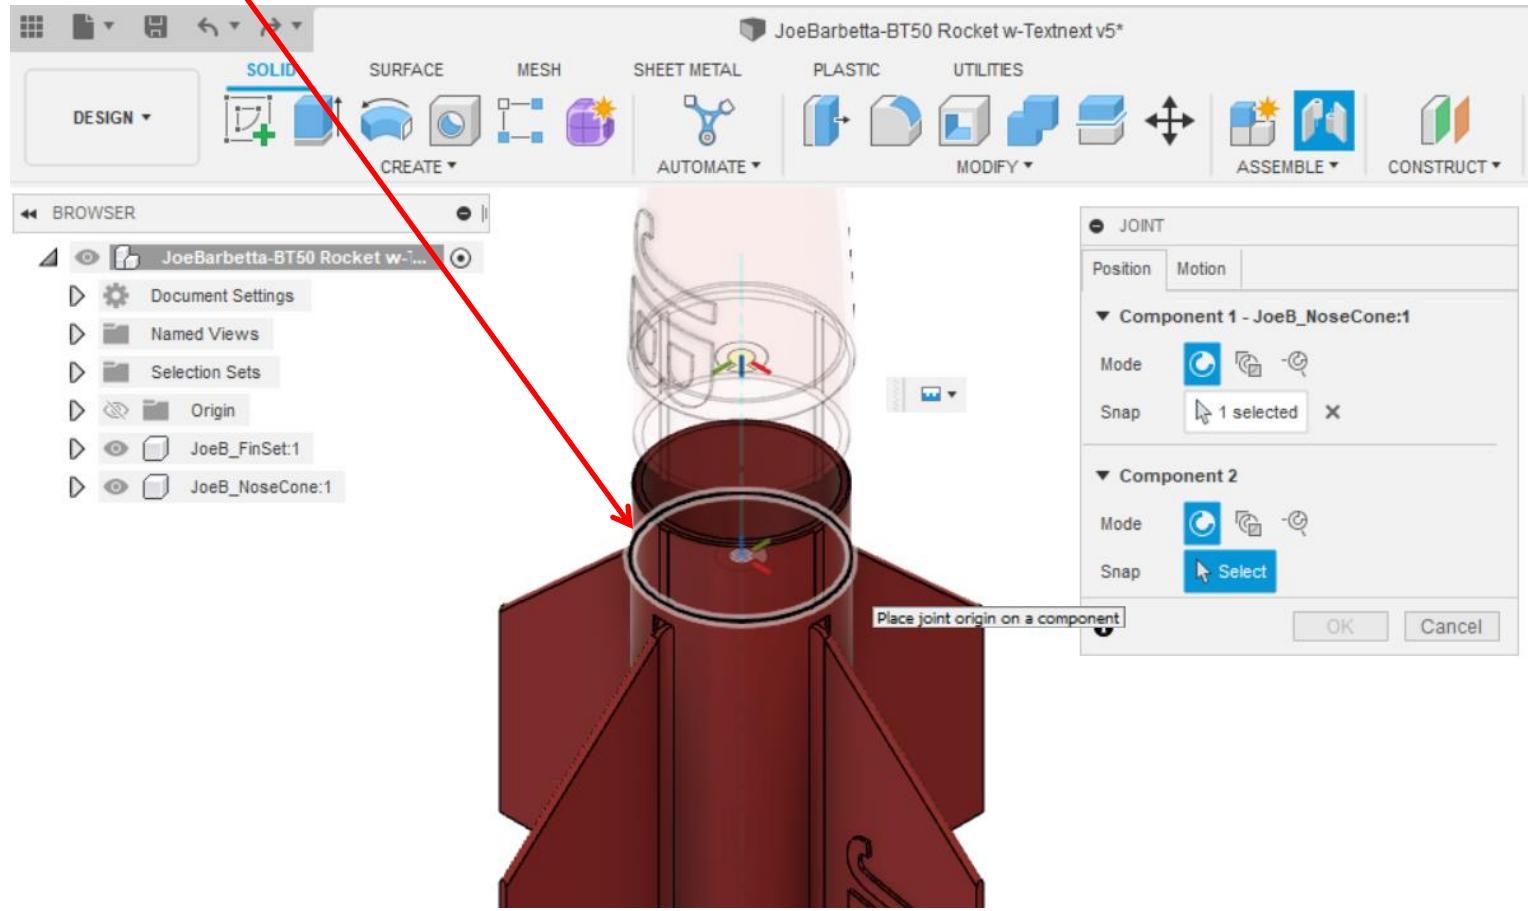


- type **b** in the Offset Z box and select **BodyTube_Length**

- use the **Home Icon** at the **View Cube** to reset the view and the Nose Cone should show at a distance from the FinSet

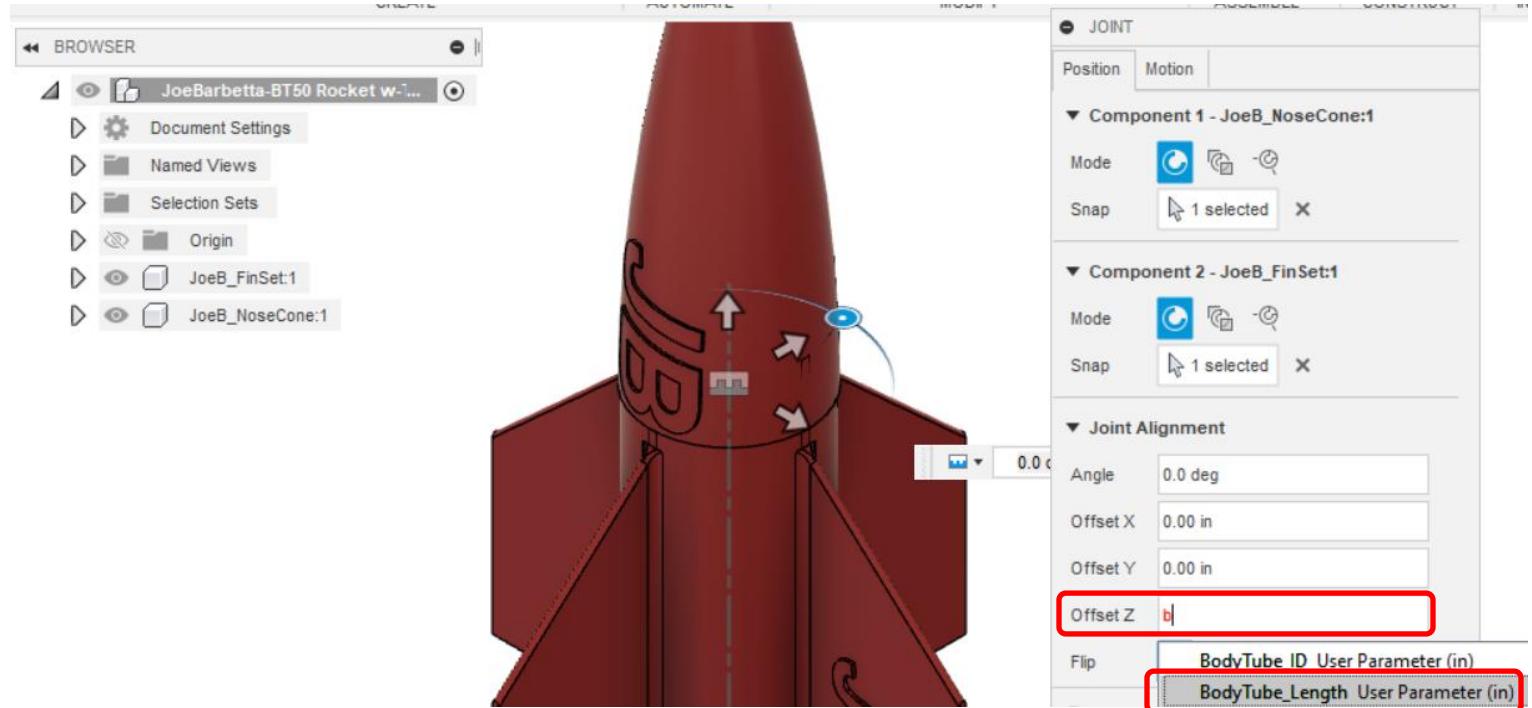


Create a New Component for the Body Tube

- right-click on the **Project Name** (top line) in the **Browser** and select **New Component**. This will insure it is a “top level” component and not as part of another *Component*.
- enter the component name: <your first name and last name initial> **BodyTube** e.g. **JoeB_BodyTube**
- select the **Create Sketch** tool
- zoom in to the **top of the Fin Set** and carefully click on the top face just below the Coupling Tube section. It is a very thin annular face and may be tough to click on.

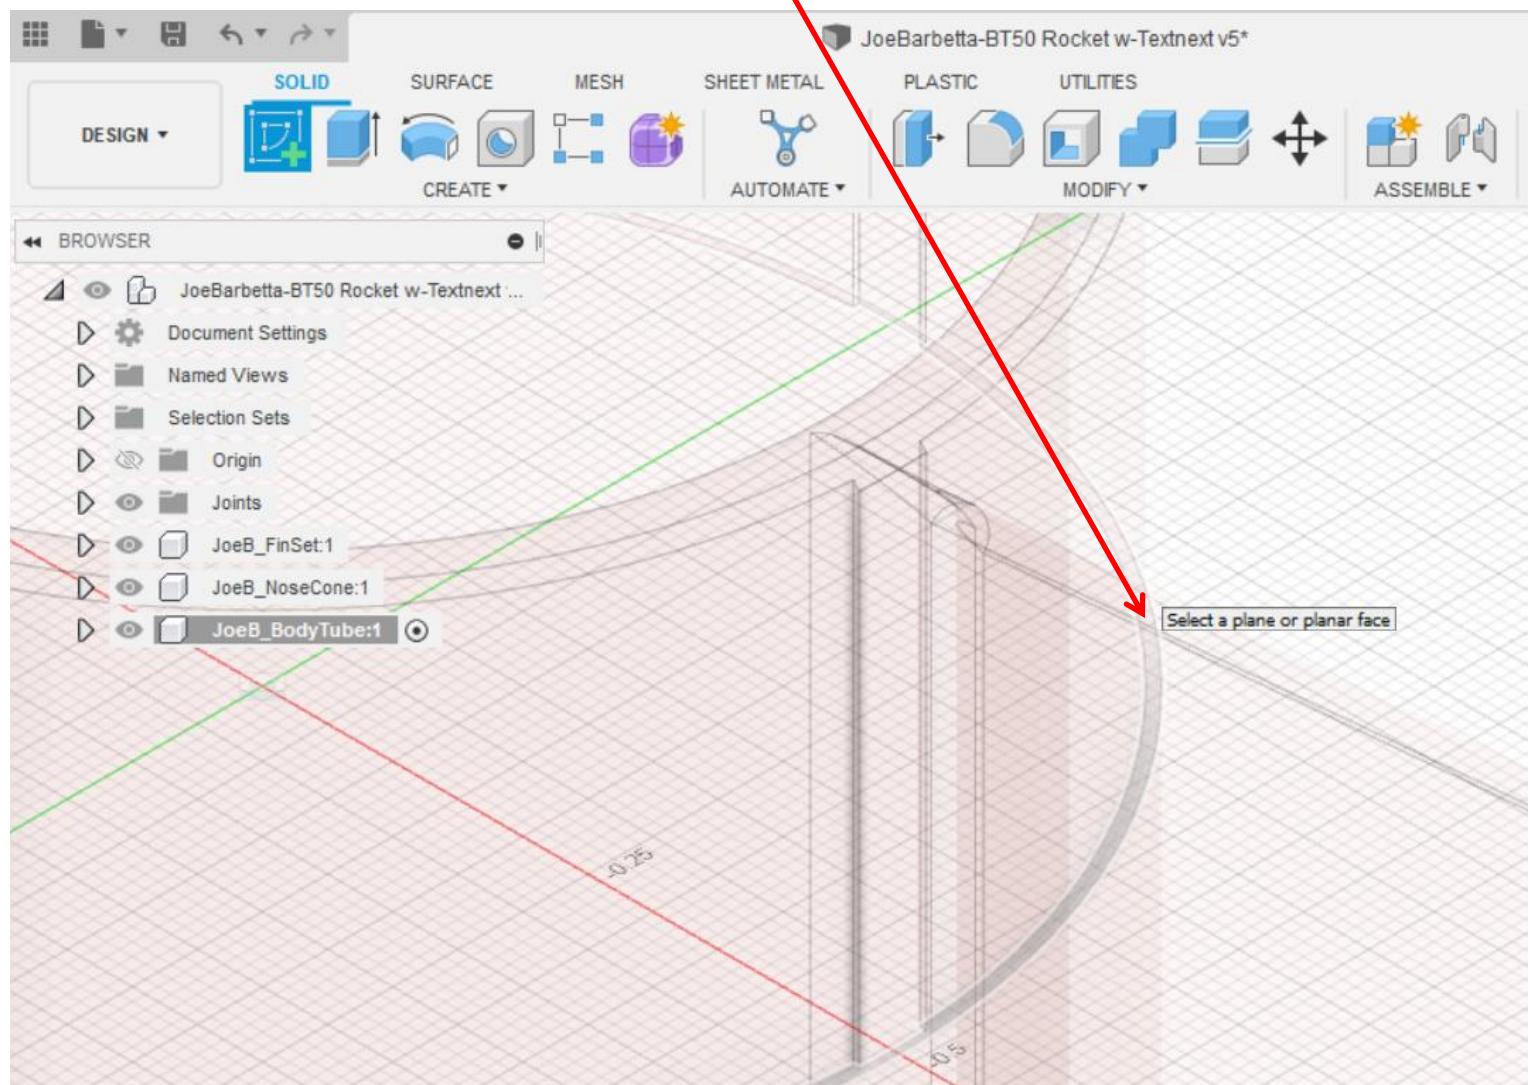


- select the **Circle** tool and create a circle from the center, type **b**, and select **BodyTube_OD**

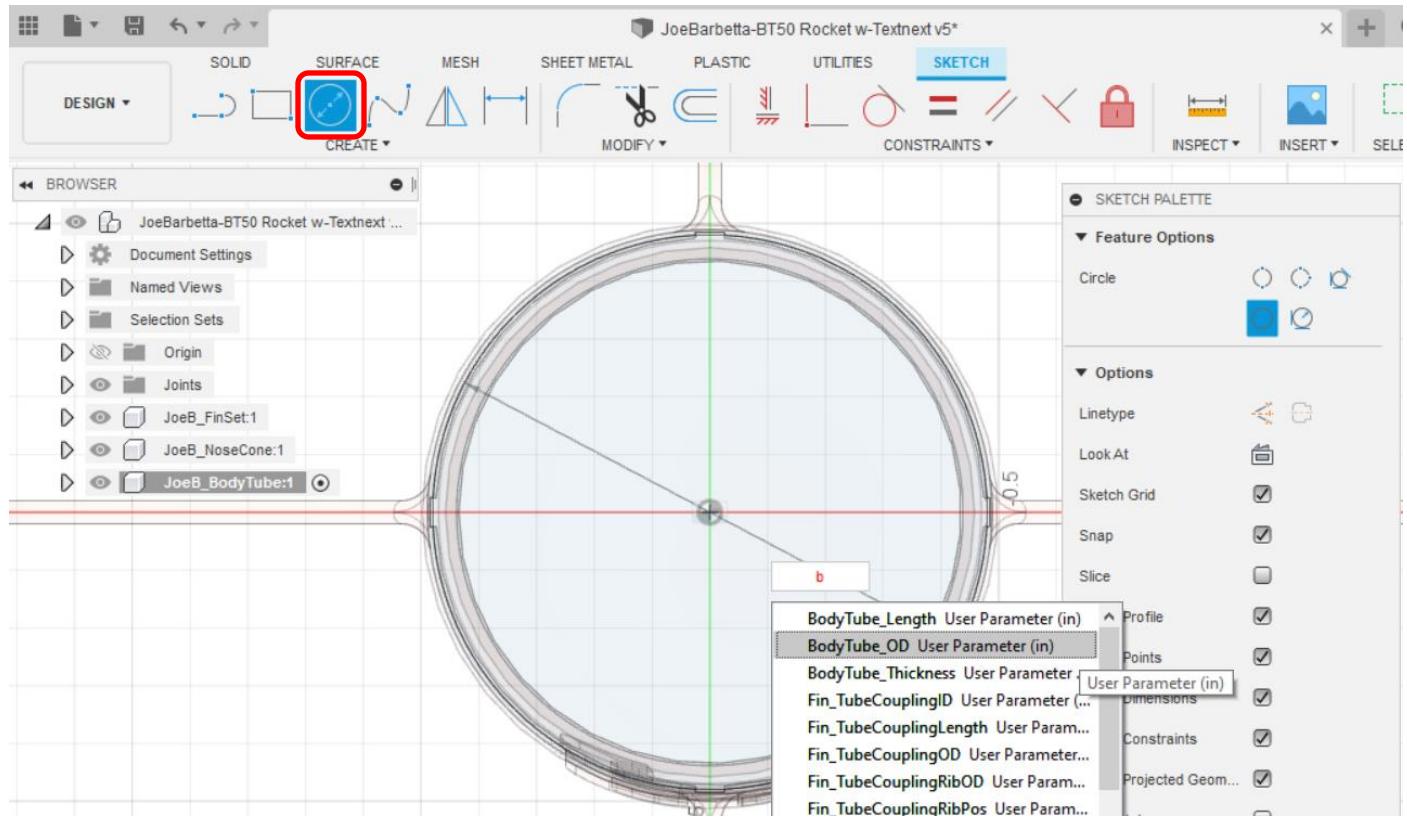


- select the Offset tool and click on the newly created circle

- type **-b** (note the minus before the b) and select **BodyTube_Thickness**. Click **OK** and then **Finish Sketch**.

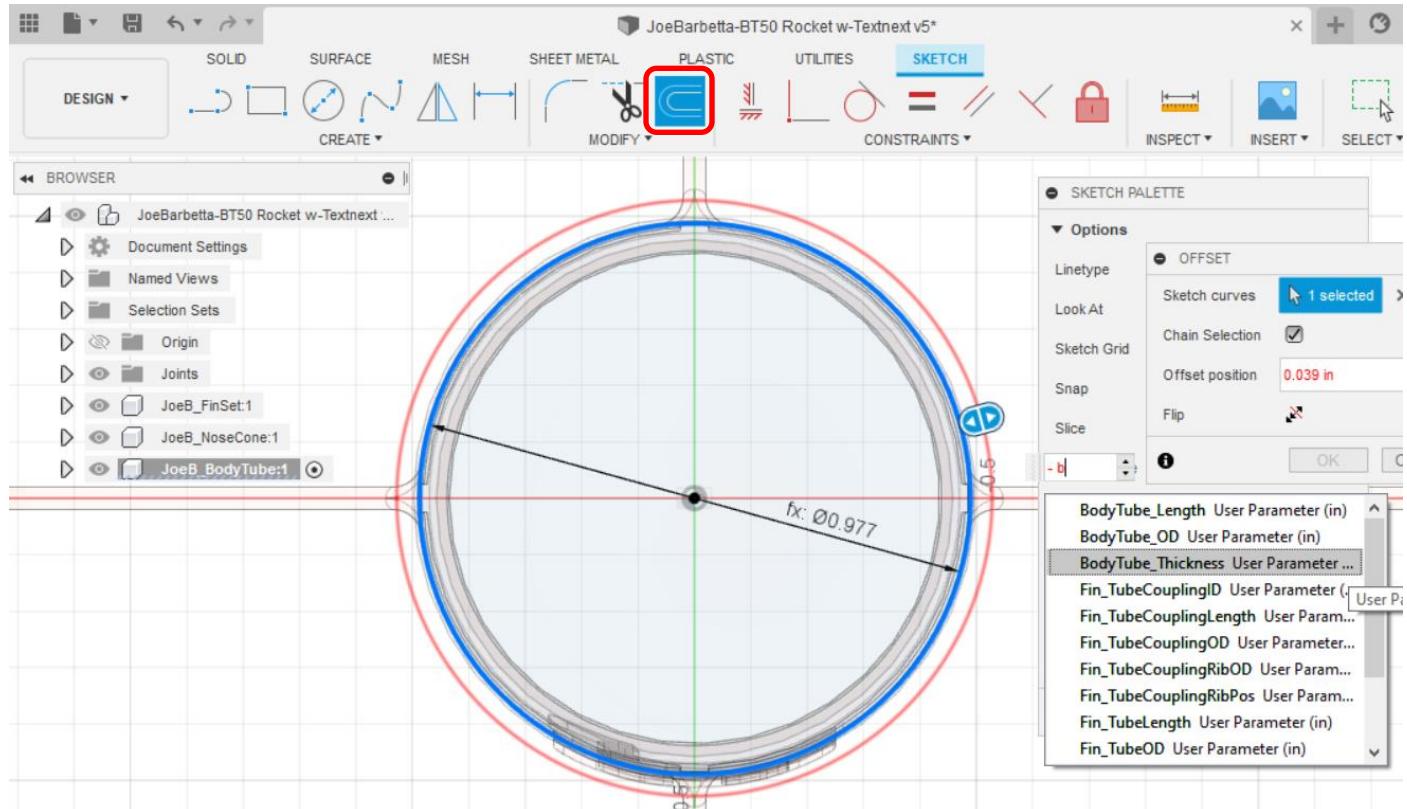

- zoom in to the **top of the Fin Set** and select the **Extrude** tool.
- carefully click on the **two annular regions**. There will be a **very thin inner region** and a **thicker outer region**.
- type **b** and select **BodyTube_Length**. Then click **OK**.

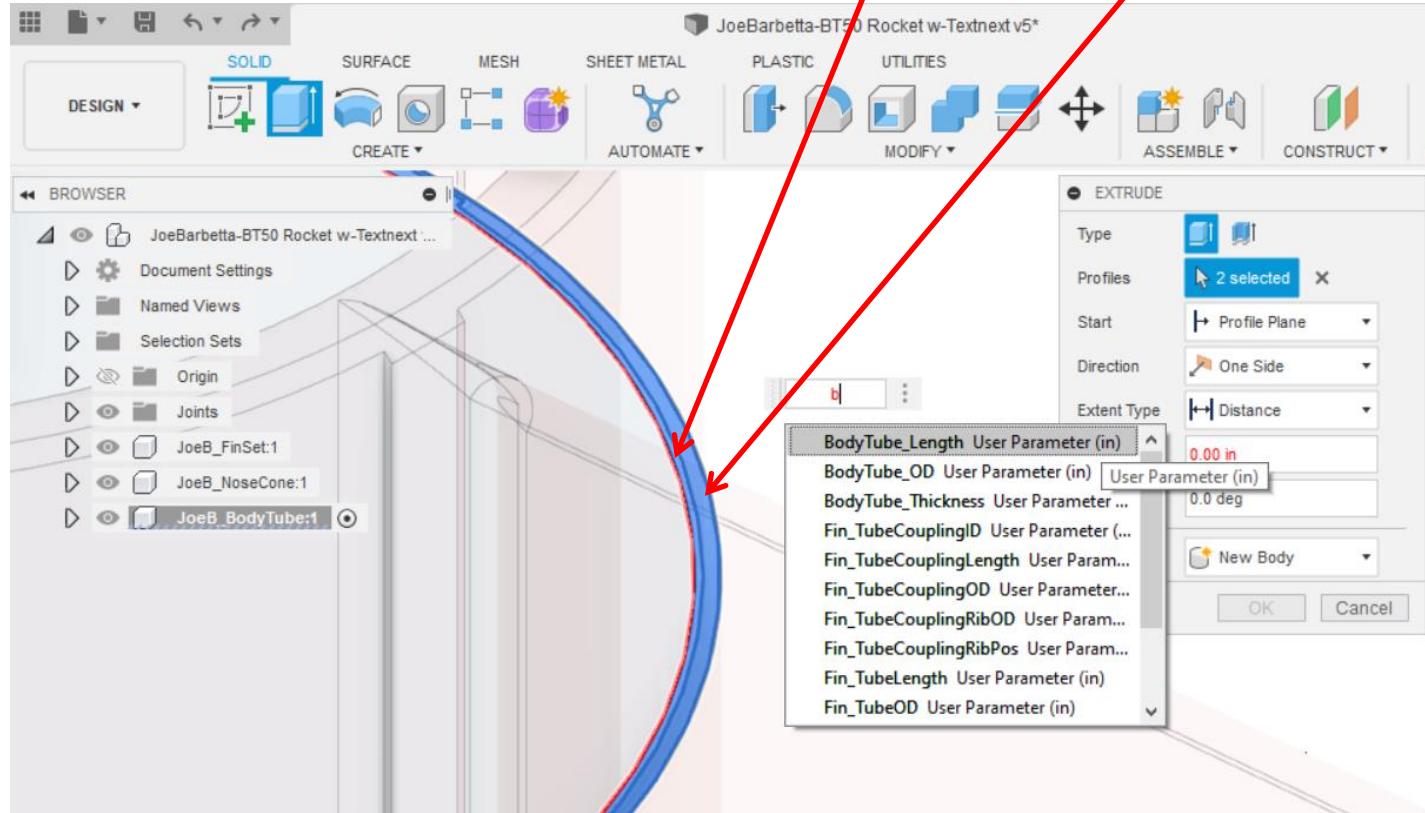

- right-click on the **BodyTube** Component and select **Physical Material**
- open the **Misc** folder and drag the **Paper** icon onto the Body Tube

