

CC-MAX® HEAVY DUTY

High Speed Centrifugal Discharge 210 - 900 FPM

U.S. Patent 8,240,070




CC MAX®



CC MAX®


CC-MAX® STANDARD PROFILE

The **CC-MAX Heavy Duty** elevator bucket is a grade above older CC style buckets. It has the traditional shape, fill and discharge characteristics, with the thicker wear surfaces our buckets are famous for. The result is longer life and greater performance. **CC-MAX** buckets are direct replacements for CC and other standard bucket styles. The most common applications include grain, fertilizer, pellets, corn, wheat, soybeans and other agricultural applications. Minimum spacing is nominal projection plus (+) 1".

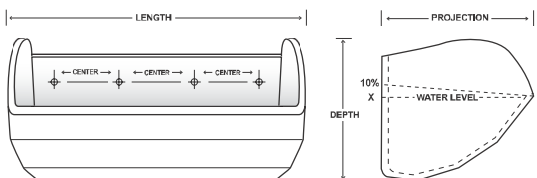

CC-MAX® LOW PROFILE

The **CC-MAX Low-Profile** bucket has a reduced height modification for closer vertical spacing on the belt. The low profile system allows more buckets per foot of elevator belt. When upgrading to **CC-MAX Heavy Duty Low Profile** buckets, horsepower requirements must be evaluated due to increased capacity. Low profile spacing is projection minus (-) 1".

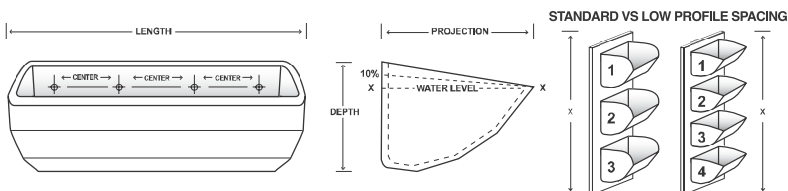

AVAILABLE MATERIALS

	POLYETHYLENE	NYLON	URETHANE	FDA NYLON
Color	 Gray, White	 Tan	 Green	 White
Application	Grain & Food Products	Hot, high impact, abrasive dense products	Heavy abrasion, sticky materials	Hot, high impact, abrasive food grade products
Temperature Range	-60° F to + 180° F (210° F Intermittent)	-60° F to + 300° F (350° F Intermittent)	-60° F to + 180° F (210° F Intermittent)	-60° F to + 300° F
FDA Approved Material	Yes	No	Yes	Yes
Comments	Economical, high density polyethylene. FDA approved material for handling food grade products.	Best for high heat applications, with tough impact and abrasion needs.	Most flexible and abrasion resistant. Resists product sticking and sharp cutting particles.	Best for high heat food grade applications, with tough impact and abrasion needs.

APPLICATIONS



FOOD

Barley, Beans, Corn, Cotton Seed, Coffee, Flour, Grains, Nuts, Rice, Sunflower, Oats, Salt, Sugar, Wheat, etc.



FEED

Bone Meal, Pellets, Meat Scrap, etc.




OTHER

Seeds, Grass Seed, Fertilizer, Perlite, Potash, Sawdust, Minerals, etc.

CC-MAX® HEAVY DUTY

Standard Profile: Polyethylene

U.S. Patent 8,240,070

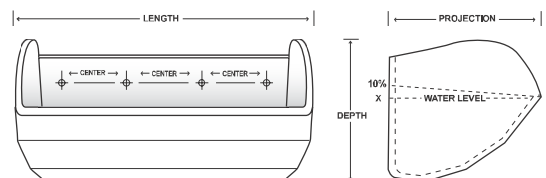

MOUNTING HOLES AND VENTING TO YOUR SPECIFICATIONS

CC-MAX® Heavy Duty: Polyethylene

BUCKET SIZE								PUNCHING, IN.				WEIGHT, LBS.	CAPACITY, CU. IN.		
BUCKET SIZE	Length		Projection		Depth		Back Wall Thickness	Centers	# of Holes	Bolt Size	Top Down	HDPE	Water Level	Water Level +10%	Std Spacing
	in.	mm	in.	mm	in.	mm									
5 x 4	5-1/2	140	4-1/2	114	4-1/4	108	0.21	3-3/16	2	1/4	1-7/16	0.53	38.30	42.13	5
6 x 4	6-1/2	165	4-1/2	114	4-1/4	108	0.21	4-3/8	2	1/4	1-7/16	0.58	45.38	49.92	5
7 x 4	7-1/2	191	4-1/2	114	4-1/4	108	0.21	2-11/16	3	1/4	1-7/16	0.65	52.10	57.31	5
6 x 5	6-1/2	165	5-1/2	140	5	127	0.26	4-3/8	2	1/4	1-11/16	0.89	70.87	77.96	6
7 x 5	7-1/2	191	5-1/2	140	5	127	0.26	2-11/16	3	1/4	1-11/16	0.99	80.75	88.83	6
8 x 5	8-1/2	216	5-1/2	140	5	127	0.26	3-1/16	3	1/4	1-11/16	1.10	90.85	99.94	6
9 x 5	9-1/2	241	5-1/2	140	5	127	0.26	3-5/8	3	1/4	1-11/16	1.18	100.99	111.09	6
10 x 5	10-1/2	267	5-1/2	140	5	127	0.26	4-1/8	3	1/4	1-11/16	1.31	114.22	125.64	6
11 x 5	11-1/2	292	5-1/2	140	5	127	0.26	3	4	1/4	1-11/16	1.45	127.44	140.18	6
8 x 6	8-1/16	205	6-5/8	168	6	152	0.27	3-1/16	3	1/4	2	1.40	136.00	149.60	7
9 x 6	9-9/16	243	6-5/8	168	6	152	0.27	3-5/8	3	1/4	2	1.52	149.19	164.11	7
10 x 6	10-9/16	268	6-5/8	168	6	152	0.27	4-1/8	3	1/4	2	1.64	166.89	183.58	7
11 x 6	11-9/16	294	6-5/8	168	6	152	0.27	3	4	1/4	2	1.73	180.62	198.68	7
12 x 6	12-9/16	319	6-5/8	168	6	152	0.27	3-3/8	4	1/4	2	1.91	200.76	220.83	7
13 x 6	13-1/16	332	6-5/8	168	6	152	0.27	3-5/8	4	1/4	2	2.13	215.00	236.50	7
10 x 7	10-9/16	268	7-7/8	200	7	178	0.32	4-1/8	3	5/16	2-3/16	2.35	236.00	259.60	8
11 x 7	11-9/16	294	7-7/8	200	7	178	0.32	3	4	5/16	2-3/16	2.44	247.74	272.52	8
12 x 7	12-9/16	319	7-7/8	200	7	178	0.32	3-3/8	4	5/16	2-3/16	2.63	267.27	293.99	8
13 x 7	13-9/16	344	7-7/8	200	7	178	0.32	3-5/8	4	5/16	2-3/16	2.78	284.60	316.93	8
14 x 7	14-9/16	370	7-7/8	200	7	178	0.32	3	5	5/16	2-3/16	2.94	303.57	333.93	8
15 x 7	15-9/16	395	7-7/8	200	7	178	0.35	3-1/4	5	5/16	2-3/16	3.10	335.00	368.50	8
16 x 7	16-9/16	421	7-7/8	200	7	178	0.35	2-7/8	6	5/16	2-3/16	3.29	350.87	385.95	8
12 x 8	12-9/16	319	8-7/8	225	8-1/4	210	0.35	3-3/8	4	5/16	2	3.25	373.00	409.00	9
13 x 8	13-9/16	344	8-7/8	225	8-1/4	210	0.35	3-5/8	4	5/16	2	3.51	404.00	440.00	9
14 x 8	14-9/16	370	8-7/8	225	8-1/4	210	0.35	3	5	5/16	2	3.76	435.07	478.58	9
16 x 8	16-9/16	421	8-7/8	225	8-1/4	210	0.38	2-7/8	6	5/16	2	4.30	515.62	567.18	9
18 x 8	18-9/16	471	8-7/8	225	8-1/4	210	0.39	3-1/8	6	5/16	2	4.79	580.61	638.67	9
20 x 8	20-9/16	497	8-7/8	225	8-1/4	210	0.42	3-1/2	6	5/16	2	5.85	655.00	720.00	9

Disclaimer: Weights, dimensions, & capacities are estimated. Actual measurements may vary. For tight tolerances or additional / updated information, please contact Maxi-Lift. Some sizes are made to order.

■ - Indicates CC-MAX punch pattern differs from HD-MAX.

High Speed Centrifugal Discharge 210 - 900 FPM