

Model Predictive Control for Soil Moisture Regulation in Crops

Andres Arias, Miguel Panqueva and Duvan Tellez-Castro

Abstract—This paper presents the design and implementation of a Model Predictive Controller (MPC) for regulating soil moisture in the root zone of a crop. A simplified dynamic model based on the soil water balance is employed, incorporating crop evapotranspiration and precipitation as external disturbances, as well as a moisture-dependent deep drainage term. The controller is formulated as a non-linear optimization problem with physical and operational constraints. Additionally, a preliminary grey-box approach based on a simple neural approximation is explored, aimed at evaluating its potential future integration as a complement to the physical model. Simulation results demonstrate that the MPC is capable of maintaining soil moisture close to a reference value, anticipating climatic disturbances and avoiding soil over-saturation.

Index Terms—automatic irrigation, CasADI, deep drainage, evapotranspiration, predictive control, water balance.

I. INTRODUCTION

Efficient water management in agriculture is a key challenge in the current context of water scarcity, climate variability, and increasing food demand. Water availability in the root zone directly influences crop growth and yield; both deficit and excess moisture generate adverse effects on the soil-plant system, such as water stress, leaching, and waterlogging. Therefore, precise regulation of soil moisture has become a central objective of modern irrigation systems [1].

Traditional irrigation schemes are primarily based on open-loop control, using fixed calendars or empirical rules [2]. Although widely used, these methods do not explicitly consider the dynamics of the soil-plant-atmosphere system nor the influence of variable climatic disturbances, such as precipitation and evapotranspiration, which can lead to inefficient use of water resources [3]. The FAO-56 standard provides a recognized framework for estimating crop water demand [4], but its practical application often lacks dynamic feedback of the soil state.

As an alternative, closed-loop control strategies have been proposed, such as PID controllers and moisture threshold-based methods [5]. However, these techniques present limitations in anticipating future disturbances and handling physical constraints in non-linear systems with delays [9]. In this context, Model Predictive Control (MPC) has consolidated as a suitable tool for soil moisture regulation, allowing the explicit incorporation of dynamic models, physical constraints, and climatic forecasts within an optimization problem [6]–[8].

This work proposes a predictive control scheme based on a dynamic model of the root zone water balance, which explicitly incorporates crop evapotranspiration, precipitation

as an external disturbance, and a moisture-dependent deep drainage term. Likewise, a preliminary Grey-Box approach is explored using a simple neural network to capture unmodeled residual dynamics, maintaining the interpretability of the physical model. The article is organized as follows: Section II presents the dynamic system model; Section III describes the formulation and implementation of the predictive controller; and Section IV analyzes the simulation results.

Additionally, a Grey-Box approximation using a simple neural network structure is preliminarily explored, oriented towards capturing residual dynamics not explicitly represented by the physical model. This approximation is considered a potential complement to the base model, preserving its interpretability and laying the groundwork for future developments.

The rest of the article is organized as follows: Section II presents the dynamic model of the system based on the soil water balance; Section III describes the formulation of the predictive controller and its numerical implementation; and Section IV analyzes simulation results under different scenarios.

II. DYNAMIC SYSTEM MODEL

This section presents the dynamic model of the soil-plant-atmosphere system that describes the evolution of soil moisture based on the main water flows: irrigation, precipitation, evapotranspiration, and drainage. This model constitutes the mathematical basis for the design of the model predictive controller.

A. Soil water balance

The system is modeled through a water balance equation in the root zone, where the state variable is the volumetric soil moisture. The continuous dynamics of the system are expressed as

$$\frac{d\theta}{dt} = \frac{1}{Z_r} (I(t) + P(t) - ET_c(t, \theta) - D(t, \theta)), \quad (1)$$

where θ is the volumetric soil moisture, Z_r is the effective depth of the root zone (mm), $I(t)$ and $P(t)$ represent irrigation and precipitation, $ET_c(t, \theta)$ is the actual crop evapotranspiration, and $D(\theta)$ is the deep drainage, following the classical water balance approach proposed in [4].

B. Precipitation modeling

In the early stages, precipitation was modeled as a rectangular pulse using step functions as follow

$$P(t) = P_0[H(t - t_1) - H(t - t_2)],$$

where $P(t)$ is the precipitation in mm/day, P_0 is the intensity of the rain event, t_1 and t_2 delimit the start and end of the event, and $H(\cdot)$ is the Heaviside function.

This formulation introduces discontinuities in time, which does not adequately represent the actual evolution of rainfall. For this reason, a continuous formulation based on a double sigmoid was subsequently adopted as

$$P(t) = P_{\max} \left[\frac{1}{1 + e^{-a(t-t_1)}} - \frac{1}{1 + e^{-a(t-t_2)}} \right],$$

where $P_{\max}$ is the maximum rain intensity, $a > 0$ is the smoothing parameter that controls the growth and decay slope of the event, and t_1, t_2 represent the beginning and end of the event. This function describes a progressive increase in rain, followed by a gradual decrease, reproducing more realistically the dynamics of a precipitation event.

C. Reformulation of crop evapotranspiration

In a first approximation, crop evapotranspiration can be considered as an external signal dependent only on time. However, this formulation does not reflect the physical fact that the actual crop evapotranspiration is reduced when the soil presents a water deficit. In order to explicitly introduce this effect, evapotranspiration is reformulated as

$$ET_c(t, \theta) = ET_{c,\text{pot}}(t) K_s(\theta),$$

where $ET_{c,\text{pot}}(t)$ is the potential crop evapotranspiration, determined from climatic models, and $K_s(\theta)$ is the water stress coefficient, defined as a non-linear and bounded function $K_s : [0, 1] \rightarrow [0, 1]$, according to FAO-56 [4].

The coefficient $K_s(\theta)$ models the progressive reduction of evapotranspiration when soil moisture falls below a critical threshold, taking values close to one in optimal conditions and approaching zero under water stress.

Two critical moisture levels are considered: the permanent wilting point θ_{wp} and the field capacity θ_{fc} , which delimit the soil's hydraulic operating range.

Initially, water stress was modeled in a binary form

$$K_s(\theta) = \begin{cases} 0, & \theta \leq \theta_{wp} \\ 1, & \theta \geq \theta_{fc} \end{cases},$$

This formulation introduces abrupt changes that do not adequately represent the physiological behavior of the plant and also generate discontinuities that hinder MPC optimization. For this reason, K_s was reformulated as a continuous function

$$K_s(\theta) = \begin{cases} 0, & \theta \leq \theta_{wp} \\ \frac{\theta - \theta_{wp}}{\theta_{fc} - \theta_{wp}}, & \theta_{wp} < \theta < \theta_{fc} \\ 1, & \theta \geq \theta_{fc} \end{cases},$$

The function models the progressive increase in water stress as a function of soil moisture, using continuous formulations that avoid abrupt saturations and guarantee differentiability, a key requirement for the MPC.

In this context, $ET_{c,\text{pot}}$ acts as an external climatic disturbance, while $K_s(\theta)$ introduces non-linear feedback that relates the hydraulic state of the soil with the actual transpiration of the crop, allowing the separation of atmospheric demand from the soil-crop response.

D. Deep drainage modeling

Deep drainage represents water losses when soil moisture exceeds field capacity, causing flow into deeper layers. This phenomenon depends solely on the water state and is not controllable. In the model, drainage is incorporated into the system dynamics without being defined as a state or control variable. Its activation upon exceeding field capacity allows for a physically consistent representation of moisture losses associated with over-saturation. In this work, drainage is initially modeled as a non-linear function of soil moisture

$$D(\theta) = \begin{cases} 0, & \theta \leq \theta_{fc} \\ k_d(\theta - \theta_{fc}), & \theta > \theta_{fc} \end{cases},$$

where k_d is a positive coefficient representing the drainage rate. This approach, common in modeling gravitational losses [17], activates drainage only when $\theta > \theta_{fc}$. However, this instantaneous activation is not physically realistic, as percolation increases gradually as soil pores become saturated. To resolve this issue, drainage was reformulated using a softplus-type smooth function

$$D(\theta) = K_d \frac{1}{\alpha} \ln \left(1 + e^{\alpha(\theta - \theta_{fc})} \right),$$

This function preserves two key properties:

- 1) For $\theta \ll \theta_{fc}$, drainage is practically zero.
- 2) For $\theta > \theta_{fc}$, drainage grows approximately linearly with θ , as in the original piecewise model.

The parameter α controls the speed of the transition. Thus, the smoothed model maintains the physical coherence of the percolation process but eliminates the discontinuities that affect MPC performance.

III. CONTROL METHODOLOGY

This section describes the design of the proposed predictive controller, whose objective is to regulate soil moisture θ around a reference value while optimizing water resources. As illustrated in Fig. 1, the MPC utilizes the dynamic model to predict the future evolution of the system and calculate the optimal irrigation action $I(t)$, explicitly accounting for climatic disturbances.

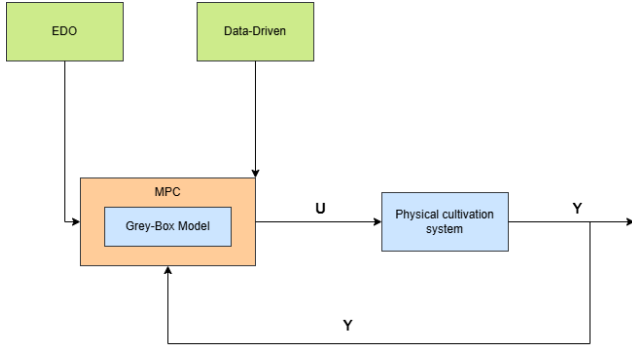


Figure 1. Block diagram of the irrigation control system.

A. Model Predictive Control Formulation

To implement the MPC, the water balance (1) is discretized using the forward Euler method with a sampling time step dt . This discrete-time formulation enables the recursive modeling of volumetric soil moisture $\theta(k)$ as a function of the applied irrigation $I(k)$ and climatic disturbances, facilitating efficient numerical optimization.

The controller's performance is governed by an objective function that penalizes both the deviation of moisture from a reference value θ_{ref} and the excessive use of irrigation. Following standard MPC formulations [6], the cost function is defined as

$$J = \sum_{k=1}^N (\theta(k) - \theta_{\text{ref}})^2 + \lambda I(k)^2, \quad (2)$$

where N represents the prediction horizon and λ is a weighting parameter used to balance the trade-off between regulation precision and resource conservation.

To ensure physically viable trajectories, the MPC incorporates constraints on both state and control variables throughout the horizon. Soil moisture is bounded by $\theta_{\min} \leq \theta(k) \leq \theta_{\max}$, with limits set at 0.1 and 0.4, respectively. Similarly, the irrigation action is restricted to $0 \leq I(k) \leq I_{\max}$, where $I_{\max}$ denotes the system's maximum capacity. The inclusion of integral action within this constrained framework compensates for persistent modeling errors without leading to signal saturation, ensuring robust steady-state performance.

B. Grey-Box Modeling Approach

Grey-box modeling integrates physical knowledge (*white-box*) with data-driven flexibility (*black-box*). This work employs a residual structure where the physical model defines the system's global trend, while an Artificial Neural Network (ANN) estimates the residual term $r(k)$. The ANN is a *feed-forward* architecture with hidden layers and non-linear *tanh* activation functions, and it is trained to minimize the squared error between the actual plant response and the simplified model.

By combining these approaches, the controller maintains the interpretability of physical laws while leveraging machine

learning to capture unmodeled dynamics. This dual methodology provides the necessary framework for the simulation-based evaluation presented in the following section.

IV. SIMULATION RESULTS

A. Incremental Model Evolution and Controller Response

This section presents the results obtained by evaluating the performance of the Model Predictive Controller (MPC) under various operating scenarios. To analyze the algorithm's robustness and responsiveness, the validation was structured as an incremental refinement process, gradually increasing the physical fidelity of the water balance model to reach a realistic representation of the soil-plant system. The complete MATLAB-CasADi implementation, including the scripts used for these simulations, is available in a public repository.¹ All numerical simulations were conducted in a controlled computational environment using a daily time step ($dt = 1$). These were implemented in MATLAB R2025 and the CasADi optimization framework. The hardware configuration consisted of an AMD Ryzen 5 7520U with 2.8 GHZ processor and 16 GB of RAM. This setup ensured efficient execution of the NLP solver (IPOPT), with average computation times per iteration suitable for real-time irrigation scheduling applications.

In the first phase, the controller was evaluated on idealized storage dynamics without disturbances. As shown in Figure 2, the MPC achieves precise asymptotic regulation toward the 0.25 reference, starting from a dry initial state. Subsequently, precipitation was integrated as a pulse-type external disturbance. The results in Figure 3 demonstrate the anticipatory capacity of the MPC, which reduces irrigation upon detecting the incoming external water input. Following this line, time-varying crop evapotranspiration ($ETc(t)$) was incorporated; Figure 4 illustrates how the controller compensates for these continuous losses through periodic updates to maintain the mass balance.

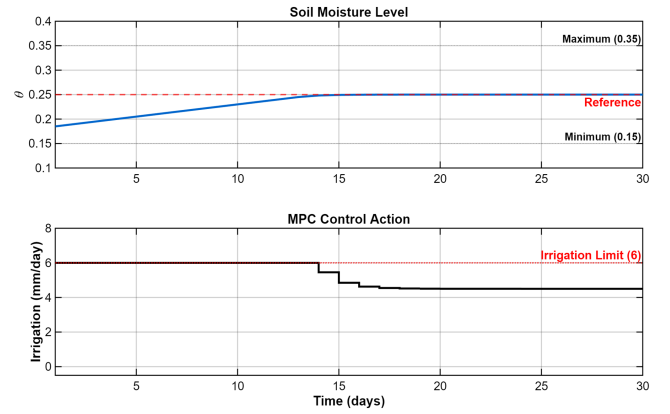


Figure 2. Evolution of soil moisture and irrigation signal for the base model without disturbances.

¹<https://github.com/MiguelPanqueva2023/soil-moisture-mpc-greybox>

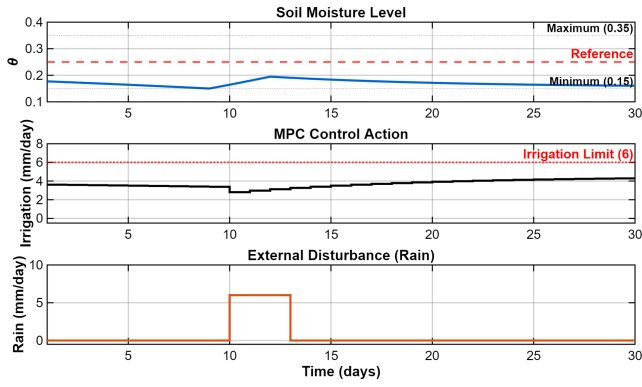


Figure 3. Comparison of the irrigation signal in the presence and absence of precipitation.

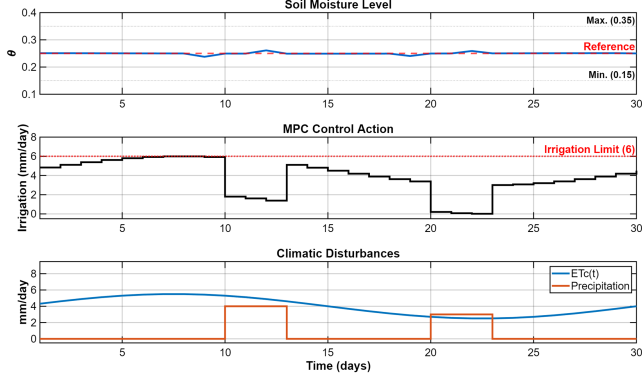


Figure 4. Time-varying crop evapotranspiration and irrigation response obtained via MPC.

In consecutive stages, the model was endowed with state dependencies to capture more complex biophysical phenomena. First, the water stress coefficient (K_s) was implemented, making the ET_c dependent on the current moisture level. Subsequently, the constant drainage was replaced by a non-linear function active only above field capacity. Although these correspond to independent development milestones, both share the results shown in Figure 5, which evidence a much richer balance dynamic where losses adjust to the actual water availability in the profile.

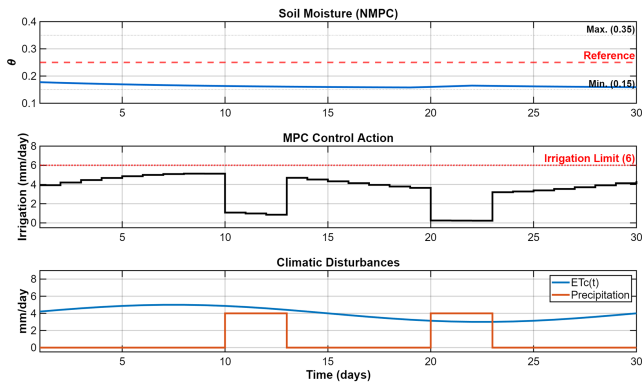


Figure 5. Water stress coefficient, moisture-dependent drainage, and soil moisture evolution.

To ensure the numerical viability of the optimizer (IPOPT) in the face of these non-linearities, the differentiability of the functions was addressed. Figure 6 presents the results after applying smoothing via the *softplus* function specifically to the drainage and the K_s coefficient of the ET_c , eliminating abrupt changes in the derivatives of these processes. A distinct advancement is shown in Figure 7, where "smooth physical saturations" were implemented to handle moisture and control limits, also incorporating an integral action component. This stage was crucial for eliminating steady-state errors and softening the controller's response to the system's physical constraints.

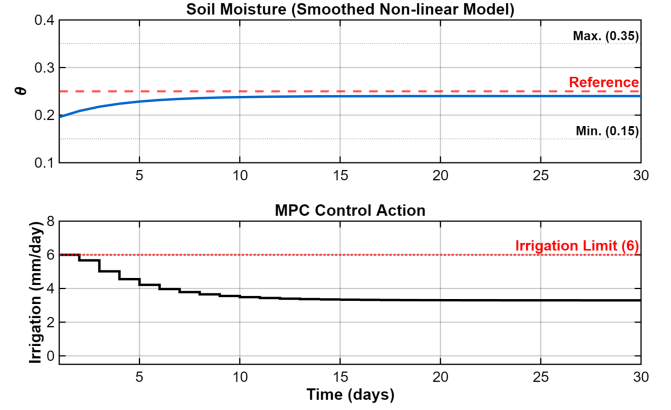


Figure 6. MPC response under smooth formulations for drainage and water stress (K_s).

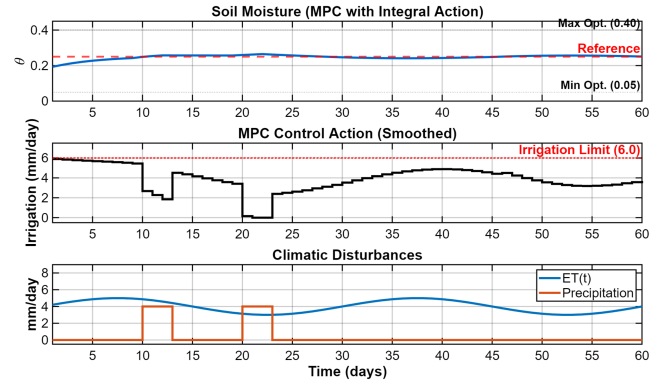


Figure 7. Effect of smooth physical saturations and integral action on soil moisture stability.

The final approach to a realistic scenario included improvements in disturbance profiles and operational objectives. In Figure 8, pulse-type rainfall was substituted by double sigmoid functions, managing to represent precipitation events with gradual and realistic intensity profiles. Finally, the physical model culminated with the integration of a dynamic physiological reference and its validation in a comprehensive 60-day climatic scenario. As shown in Figure 9, the system responds robustly to the combination of variable moisture, smoothed non-linear drainage, and realistic disturbances, consolidating

a control scheme that balances agronomic precision with computational stability.

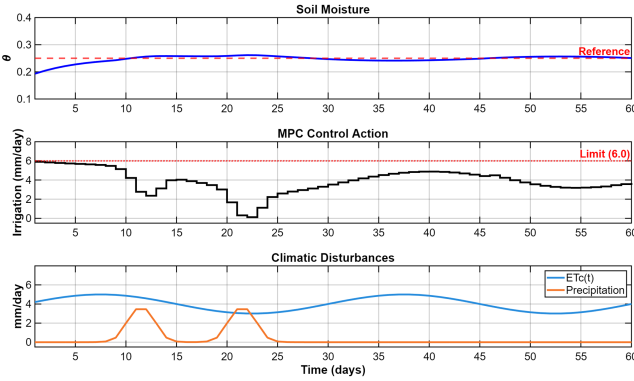


Figure 8. Continuous modeling of rain events using a double sigmoid function.

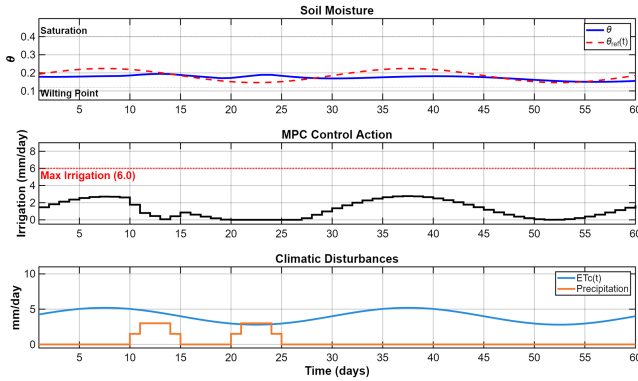


Figure 9. MPC performance under variable moisture references and contrasting climatic scenarios.

This performance establishes the basis for the next phase of the study. Given that even the most detailed physical model has limitations in capturing unmodeled dynamics or uncertain parametric variations, the **grey-Box** approach is introduced below. In subsections J to L, the design and training of a residual neural network will be described, aimed at learning the discrepancies between this developed physical model and the observed behavior of a "real plant", seeking to close the precision gap through machine learning.

B. Grey-Box Identification: Data Generation and Training

To bridge the gap between theoretical modeling and unmodeled biophysical dynamics, a Grey-Box identification process was implemented. Synthetic data were generated by integrating the predictive controller with the physical model under realistic operating conditions. The controller calculates optimal irrigation using the physical model, while the simulated plant includes smooth disturbances and bounded noise. This simulation setup allows for the collection of high-fidelity state-action pairs across the entire operating range.

The residual is defined as the mathematical difference between the theoretical model response and the perturbed

plant response. Figure 10 illustrates that while the physical model captures global trends, the simulated plant exhibits specific biophysical deviations. These residuals are bounded and exhibit a clear temporal structure, proving they represent learnable patterns rather than stochastic noise. Such predictability confirms that the Grey-Box approach can effectively compensate for systematic modeling gaps.

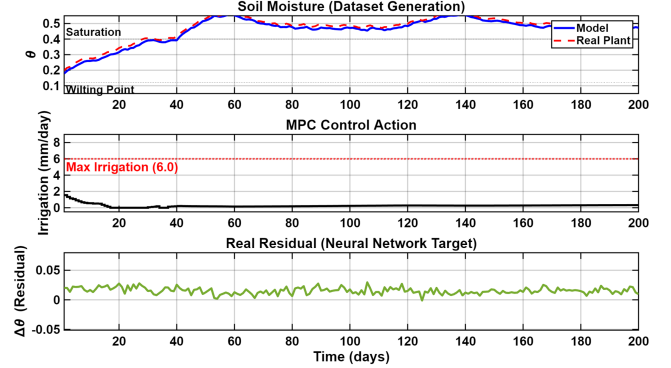


Figure 10. Synthetic data generation: (top) moisture evolution (model vs plant); (center) irrigation calculated by the MPC; (bottom) residual term target for neural network training.

A residual neural network was trained with this dataset to approximate the error between the simplified model and the plant. The network employs a feed-forward architecture with hidden layers and non-linear *tanh* activation functions, optimized via mean squared error minimization. As shown in Figure 11, the trained network accurately tracks the residual trend without introducing high-frequency instabilities into the system. This offline validation ensures the network is prepared for future real-time integration and rigorous closed-loop stability analysis.

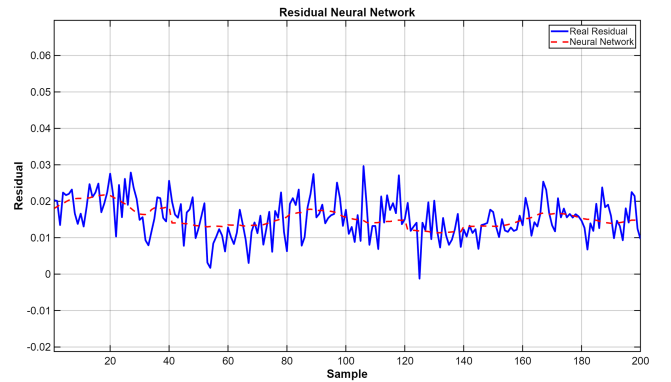


Figure 11. Comparison between the system's actual residual and the residual estimated by the trained neural network.

C. Integration of the Grey-Box model into the MPC controller

The residual neural network was integrated into the MPC under a Grey-Box approach, where the physical model defines the main dynamics and the network corrects unmodeled errors. This compensation improves reference tracking without significantly increasing the control action, as shown in Figure 12.

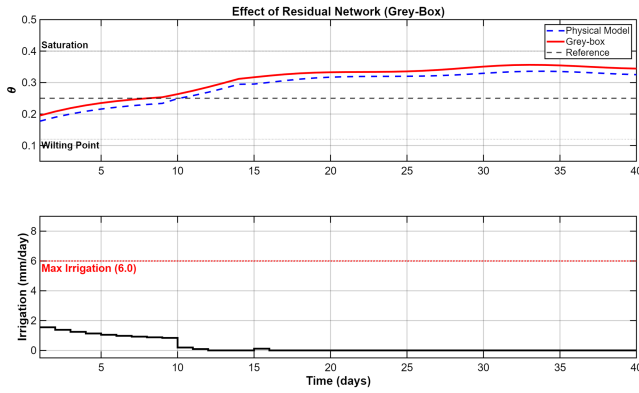


Figure 12. Comparison between the physical model and the Grey-Box scheme within the MPC.

V. CONCLUSIONS AND FINAL REMARKS

This study demonstrates that the incremental incorporation of physical complexity—specifically water stress and moisture-dependent non-linear drainage—significantly enhances the representation of soil dynamics within a predictive control framework. The results confirm that an MPC based on a refined water balance model achieves stable and robust regulation across diverse climatic scenarios. A key technical finding was that the implementation of smoothing functions (*softplus*) and soft physical constraints is essential to guarantee numerical stability and optimizer convergence without sacrificing physical consistency.

Furthermore, the transition to a hybrid Grey-Box approach proved effective in bridging the gap between simplified physical laws and complex residual dynamics. By limiting the neural network’s learning to these residuals, the system achieved superior predictive precision while preserving the transparency and interpretability inherent in the physical model.

In conclusion, the proposed framework provides a robust and computationally efficient solution for precision irrigation. Future work will focus on validating this approach with experimental field data and conducting a formal stability analysis to assess the controller’s performance under significant modeling uncertainties and sensor noise.

REFERENCES

- [1] Food and Agriculture Organization, *Water for Sustainable Food and Agriculture*, FAO, 2017.
- [2] R. Smith, “Conventional irrigation scheduling methods,” *Agricultural Water Management*, vol. 45, no. 2, pp. 123–135, 2000.
- [3] J. Šimůnek et al., “Modeling water flow in soils,” *Vadose Zone Journal*, vol. 7, no. 2, pp. 587–599, 2008.
- [4] Food and Agriculture Organization, *Crop Evapotranspiration – FAO Irrigation and Drainage Paper 56*, FAO, 1998.
- [5] M. Pérez et al., “PID-based irrigation control systems,” *Computers and Electronics in Agriculture*, vol. 98, pp. 92–104, 2013.
- [6] E. F. Camacho and C. Bordons, *Model Predictive Control*. Springer, 2013.
- [7] E. E. Abioye et al., “Model-based predictive control strategy for water-saving drip irrigation,” *Smart Agricultural Technology*, vol. 4, 100179, 2023.
- [8] A. Kumar et al., “A review of model predictive control in precision agriculture,” *Smart Agricultural Technology*, vol. 10, 100716, 2025.
- [9] H. Vereecken et al., “Nonlinear soil water dynamics,” *Water Resources Research*, vol. 46, 2010.

- [10] S. García et al., “Limitations of simplified soil water models,” *Irrigation Science*, vol. 36, pp. 219–230, 2018.
- [11] Y. Zhang et al., “Data-driven model predictive control for irrigation management in greenhouses,” *Smart Agricultural Technology*, vol. 12, 101071, 2025.
- [12] A. Liu and D. Zhao, “Adaptive model predictive control for optimal irrigation scheduling,” *Agricultural Systems*, vol. 226, 103684, 2024.
- [13] A. Liu, D. Zhao, and Y. Wei, “Model predictive control of irrigation incorporating rainfall intensity and soil properties,” *Agriculture*, vol. 15, no. 5, 2025.
- [14] L. Farhaoui et al., “Smart irrigation systems and predictive control: A review,” *Precision Agriculture*, vol. 26, pp. 1–22, 2025.
- [15] E. Goyal et al., “IoT-based soil moisture monitoring and irrigation control,” *Computers and Electronics in Agriculture*, vol. 216, 108574, 2024.
- [16] M. Allen et al., “Soil water balance modeling for irrigation control,” *Agricultural Water Management*, vol. 82, pp. 113–129, 2006.
- [17] R. Walker et al., “Deep drainage processes in agricultural soils,” *Hydrological Processes*, vol. 20, pp. 2569–2582, 2006.
- [18] L. Ljung, “Perspectives on system identification and grey-box modeling,” *Automatica*, vol. 113, 108662, 2020.
- [19] B. T. Agyeman et al., “Integrating machine learning and model predictive control for irrigation scheduling,” *arXiv preprint arXiv:2306.08715*, 2023.
- [20] J. F. Noguera-Polania et al., “Soil moisture prediction using LSTM networks for irrigation management,” *Engineering Applications of Artificial Intelligence*, vol. 125, 106621, 2024.
- [21] S. Qin et al., “Model predictive control under climate uncertainty for agricultural systems,” *Control Engineering Practice*, vol. 144, 105755, 2024.
- [22] F. Fele et al., “Coalitional model predictive control of irrigation canals,” *arXiv preprint arXiv:2501.17561*, 2025.