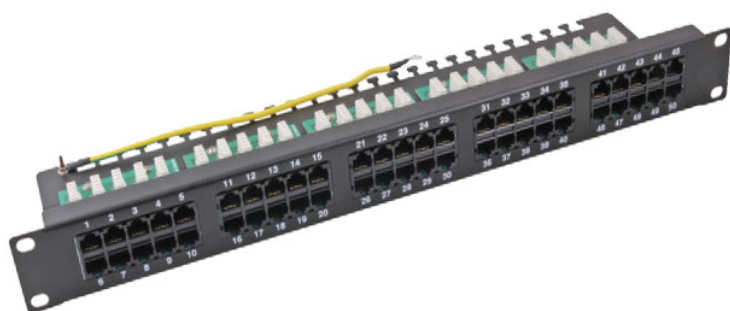# DATASHEET

ISDN Patchpanel 19" 1U 50port, Unshielded, Cat.3

ECOLAN®

CE

Description

1U, Category 3
Unshielded RJ45 8(4) jacks
4-pole LSA IDC terminals
Assignment: 3-6/4-5
High packing density
Strain relief via cable ties

General data

Mounting method	482.6 mm (19 inch)-installation
Category	3
Number of height units	1
Connection type	LSA
Suitable for number of connectors	50
Type of connector	RJ45 8(8)
Screened	False

Dimensions

Height	44.45 mm
Width	483.0 mm

Available variants

Article no.	Title	N. of buses/couplings	Colour	RAL-number
PA37595SW.2	Panel 50 x RJ45 8/4 1U ISDN, RAL7035, Cat.3	50	black	7035

This datasheet was created automatically on 22-03-2020 . Technical changes reserved.

PA37595SW.2	Patch Panel 50x RJ45 8/4 1U ISDN, RAL9005, Cat.3	50	Black	9005

This datasheet was created automatically on 22-03-2020 . Technical changes reserved.