

DATASHEET

SC Fiber Pigtail APC

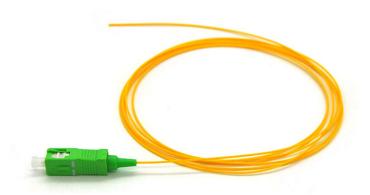

PSCAS2

Technical drawings



Description

The SC APC fibre pigtail

The 3C Ai C libre pigtan	
General data	
Туре	fiber pigtail
Anti-kink sleeve	put-on
Mechanical characteristics	
Max. Tension	3 N
Mion. Bending Radius Static	10xOD
Minimaler Biegeradius Dynamic	20xOD
Cable construction	
Outer Diameter	0,9 mm
Cable sheath	
Jacket Material	LSZH
Dimensions	
Length	1,0 - 1,5 or 2.0 m
Environmental conditions	
Operating Temperature	-20 – 70 °C
Standards, approvals, certifications	
Connector Conform to Standard	IEC61754-4
Cable Conform to Standard	IEC60793-2

 $^{{}^*\}mathit{Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.}$