


## DATASHEET

### Universal Cable U-DQ (ZN)BH MM OM3

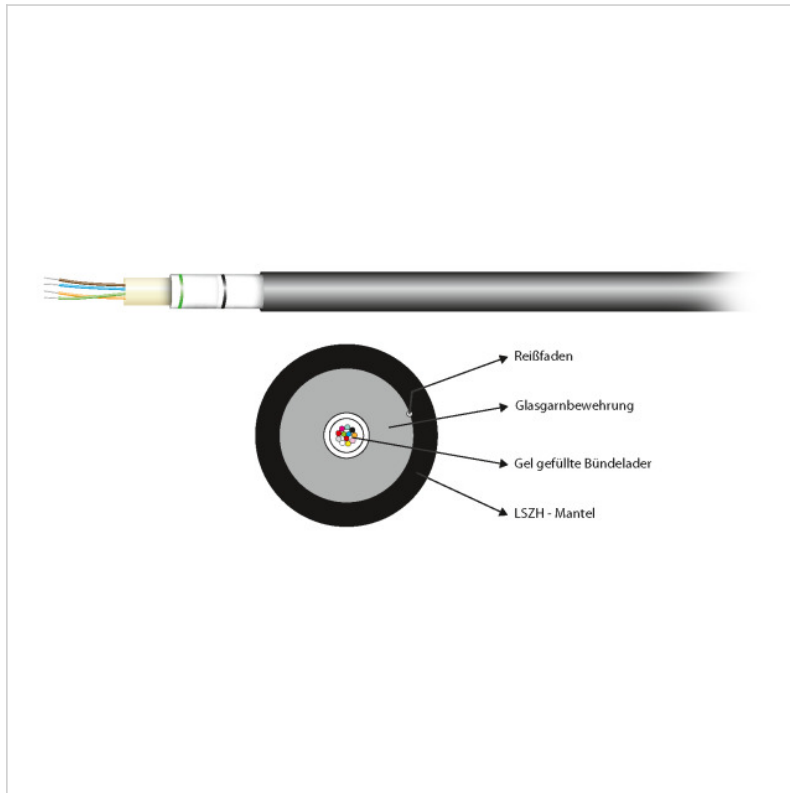

Indoor- and outdoor application  
 Installation in conduits and shafts  
 Primary cabling (campus): backbone  
 Secondary cabling (vertical): riser area (backbone)  
 Universal cable LSZH black, non-metallic, longitudinal water tight  
 UV resistant, halogenfree, rodent resistant  
 Central/Loose tubes, 250µm coat. The cable diameter can vary.

<b>Fibre type:</b>	Multimode 50/125
<b>Fibre category:</b>	OM3
<b>Application:</b>	indoor/outdoor
<b>Material outer sheath:</b>	LSZH
<b>Colour outer sheath:</b>	black
<b>Longitudinal water blocking:</b>	True
<b>Radial water blocking:</b>	False
<b>Cable metal free:</b>	True
<b>Halogen free (acc. EN 50267-2-2):</b>	True
<b>Circuit integrity:</b>	No
<b>Strain relief:</b>	True
<b>Low smoke (acc. EN 61034-2):</b>	True
<b>Armouring:</b>	True
<b>Oil resistant (acc. EN 60811-2-1):</b>	False
<b>Flame retardant:</b>	According to EN 60332-1-2
<b>Temperature Range (Operation):</b>	-20..70 °C
<b>Temperature Range (Storage):</b>	-30..70 °C
<b>Temperature Range (Installation):</b>	5.. 50 °C