
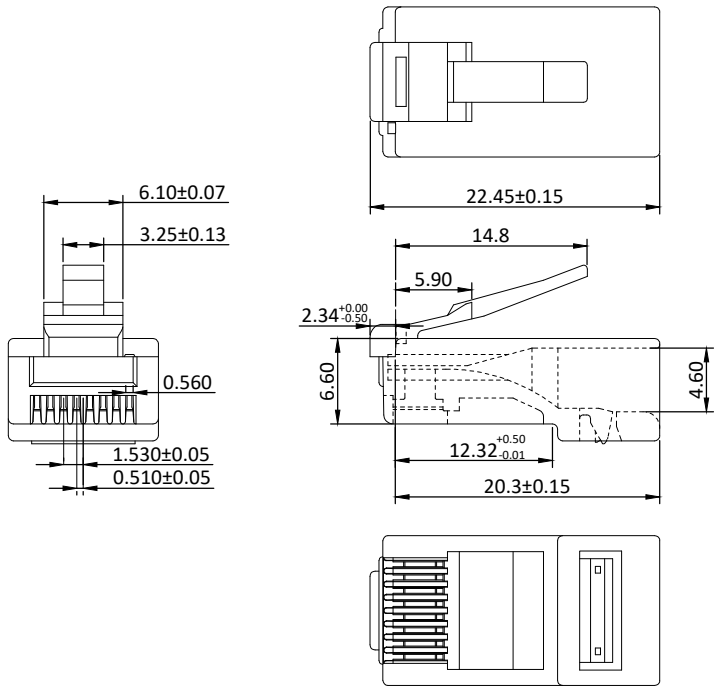



VERSION	DATE	REMARK
A/0	2016.8.10	FIRST ISSUED



Performance Remark:

- Environmental:**
Compliant with RoHS and Reach
- Electrical:**
 - 250V AC max, at 2A
 - Dielectric withstanding 1000V DC/min, <0.5A
 - Insulation Resistance: >500MΩ, 1000V DC/min.
 - Contact Resistance: <20 MΩ
- Mechanical:**
 - Cable to plug tensile strength: 20lbs(89N)min.
 - Durability: above 750 mating cycles
- Temperature for operation:**
-40℃ to +125℃
- Material:**
Housing material: Polycarbonate UL94V-0 or 94V-2.
Color: transparent or colorful can be for choices.
Gold plating thickness: From gold flash to 50U" are all available.

Blade	E	Y					OTHER
DRAWING							
MARK		✓					

GOLD PLATING	FMU"	3MU"	3U"	6U"	15U"	30U"	50U"	CABLE TYPE	ROUND	FLAT
MARK		✓						MARK		

JINHUA GUANYANG ELECTRONIC TECHNOLOGY CO.,LTD					
ITEM	Cat.6 UTP PLUG	DIMENSIONAL TOLERANCE		UNIT	mm
MATERIAL	PC	X.X±0.20	X.X°±5°	SCALE	NULL
DWG NO	CNRJ45C6	X.XX±0.10	X.XX°±2°	PORJ	
APPROVAL		CHECK		DRAW	
Jorge Tena		Charrik Aissa			