

DATASHEET

USB2.0 Connection Cable Type A Plug to Type Micro-B Plug, Classic

CAB5228SW







Description

USB cable with support for USB2.0.

Through the quality conductor and the excellent shielding this cable is able to transmit data up to 480Mbit per seconds. High-quality Connection Cable for printer, USB hard-disks and other devices.

General data					
Type of connector connection 1	USB-A				
Number of poles connection 1	4				
Connection type connection 1	plug				
Type of connector connection 2	USB-Micro B				
Number of poles connection 2	5				
Connection type connection 2	plug				

Available variants

Article no.	Title	Colou	Colour Length	
CAB5228SW0,5	USB2.0 Connection Cable A-Micro-B 5pol., M-M, 0.5m, black, Classic	black	0.5 m	
CAB5228SW1	USB2.0 Connection Cable A-Micro-B 5pol., M-M, 1.0m, black, Classic	black	1.0 m	
CAB5228SW1,8	USB2.0 Connection Cable A-Micro-B 5pol., M-M, 1.8m, black, Classic	black	1.8 m	



DATASHEET


USB2.0 Connection Cable Type A Plug to Type Micro-B Plug, Classic

CAB5228SW

USB2.0 CLASSIC



Technical drawings

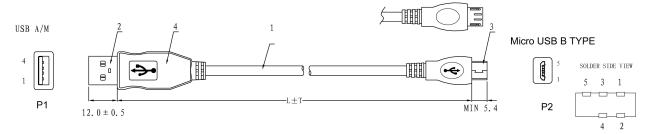


PRODUCT FAMILY							
Product No.	L (LENGTH) /M	T (TOLERANCE)/CM	CABLE				
K5228SW. 0, 5	0.5	1.5	Black				
K5228SW. 1	1	2.5	Black				
K5228SW. 1, 5	1.5	3	Black				
K5228SW. 1, 8	1.8	3. 5	Black				
K5228SW. 3	3	4	Black				
K5228SW. 5	5	4.5	Black				

4		MOLDED	PVC	2	
3		CONN-II	USB2.0 Micro USB B TYPE, gold plated contacts	1	NICKEL
2		CONN-I	USB2. 0 A/M, gold plated contacts	1	NICKEL
1		CABLE	28AWG*2C CU+28AWG*1P CU+ AL Foi1+48 BD OD:4.5MM	1	
NO.	PART NO.	PART NAME	MATERIAL	Q' TY	REMARKS

PIN OUT

Р1 1 ---- 1 RED 4 ---- 5 BLACK G ---- G GROUND

CABLE STRUCTURE



NOTE

- 1. Electrical test:
 - (1) 100% open short and miss wire test;
- (2) Insulation resistance: DC300V/5s 10Mohm min;
- 2. Package: Polythene bag