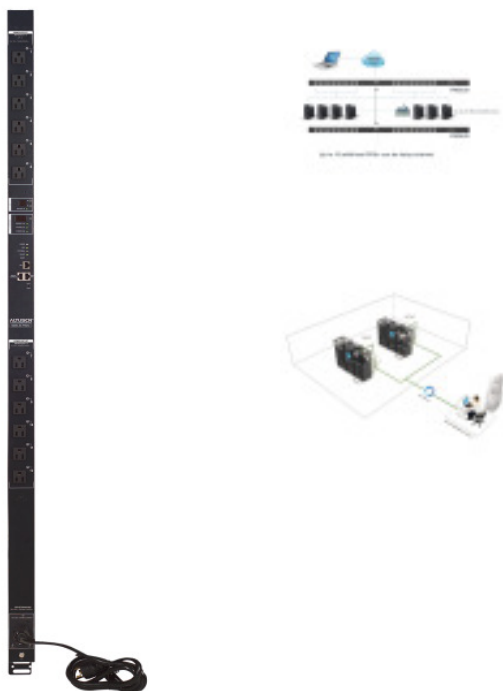# DATASHEET

Aten 12-Port 19" 0U Intelligent Power Distribution Unit, cascadable

• Remote control and monitoring via webinterface or Java-GUI (without browser)
• Local and remote control of individual outlets: ON, OFF, CYCLE
• Power-on sequencing and definable delay of outlets
• Daisy chain up to 15 addition stations, max. 192 resp. 320 outlets
• Safe shutdown support
• Power status measuring per outlet
• Supports external sensors for temperature and humidity
• Exceed threshhold alert via E-Mail, SNMP-Trap, audible and built in optical alert,
• digital switching port
• Auto-Ping pings a device to determine its status
• Separate power for the unit's own power and its outlets: the user interface is still accessible even when an overload condition trips the devices circuit breaker
• 2 x 7-segment LED display shows station and outlet ID
• 3 x 7-segment LED display shows current, voltage or power consumption
• Compatible to other Aten devices: server, serial devices and PDUs can be controlled via one single interface
• Integration with ALTUSEN CC2000 Management software and KVM devices, supports linking of outlets and KVM ports
• Supports access via local console
• Supports SNMP
• Supports Telnet and SSH
• Multi-language support
• Scope of delivery: 1 x PDU, 4 x serial adapter, 2 x rack mount kit, 1 x software CD, 1 x user manual
• Further technical details please find in datasheet

Mounting dimension:	-
Mounting dimension (metrical):	- mm
Mounting direction:	vertical
Number of height units:	Nein
Supply voltage:	240.0 V
Over voltage category:	3
Mains filter:	No
Switchable:	yes
SNMP:	yes
With display:	yes
Evaluation:	on distance
With LED indication:	yes
With fuse:	yes
Ampere meter:	yes
With temperature measurement:	yes
With mounting material:	yes

Article no.	Title	Switching Capability	Measuring Capability	Cascadable	Auto ping	Electrical connection	Type of electric connection	Cable length m	Number of socket outlets with protective contact	Number of socket outlets with earth pin	Number of C13 socket outlets	Number of C19 socket outlets	Number of C20 socket outlets	Number of GST18/3 socket outlets	Number of other socket outlets	Length mm	Width mm	Height mm	Depth mm
B5212G	Intelligente 0HE PDU 12 Ports, Mess:PDU/Schalt:Port/A-P/kask.	per Port	per PDU	yes, up to 15 x	yes	Power cord with plug	other	-	-	0	6	0	0	0	0	-	546	1340	642