


DATASHEET

Outdoor Cable A-DQ (ZN)B2Y MM OM2

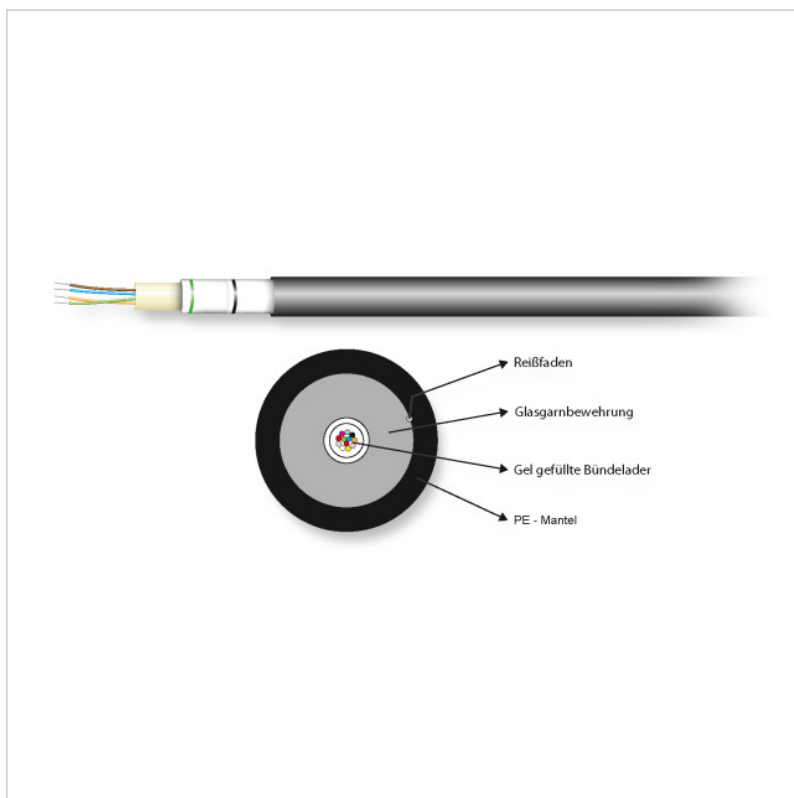

Outdoor
Suitable for direct burial, duct or shaft installation
Primary cabling (Campus), Backbone
PE jacket black , non-metallic, longitudinal water tight
UV resistant, rodent resistant
Central/Loose tubes, 250µm coating. The cable diameter can vary.

Fibre type:	Multimode 50/125
Fibre category:	OM2
Application:	outdoor
Material outer sheath:	PE
Colour outer sheath:	black
Longitudinal water blocking:	True
Radial water blocking:	False
Cable metal free:	True
Halogen free (acc. EN 50267-2-2):	False
Circuit integrity:	No
Strain relief:	True
Low smoke (acc. EN 61034-2):	False
Armouring:	True
Oil resistant (acc. EN 60811-2-1):	False
Flame retardant:	No
Temperature Range (Operation):	-20..70 °C
Temperature Range (Storage):	-30..70 °C
Temperature Range (Installation):	5.. 50 °C