


CN880351



[Product Structure Diagram]

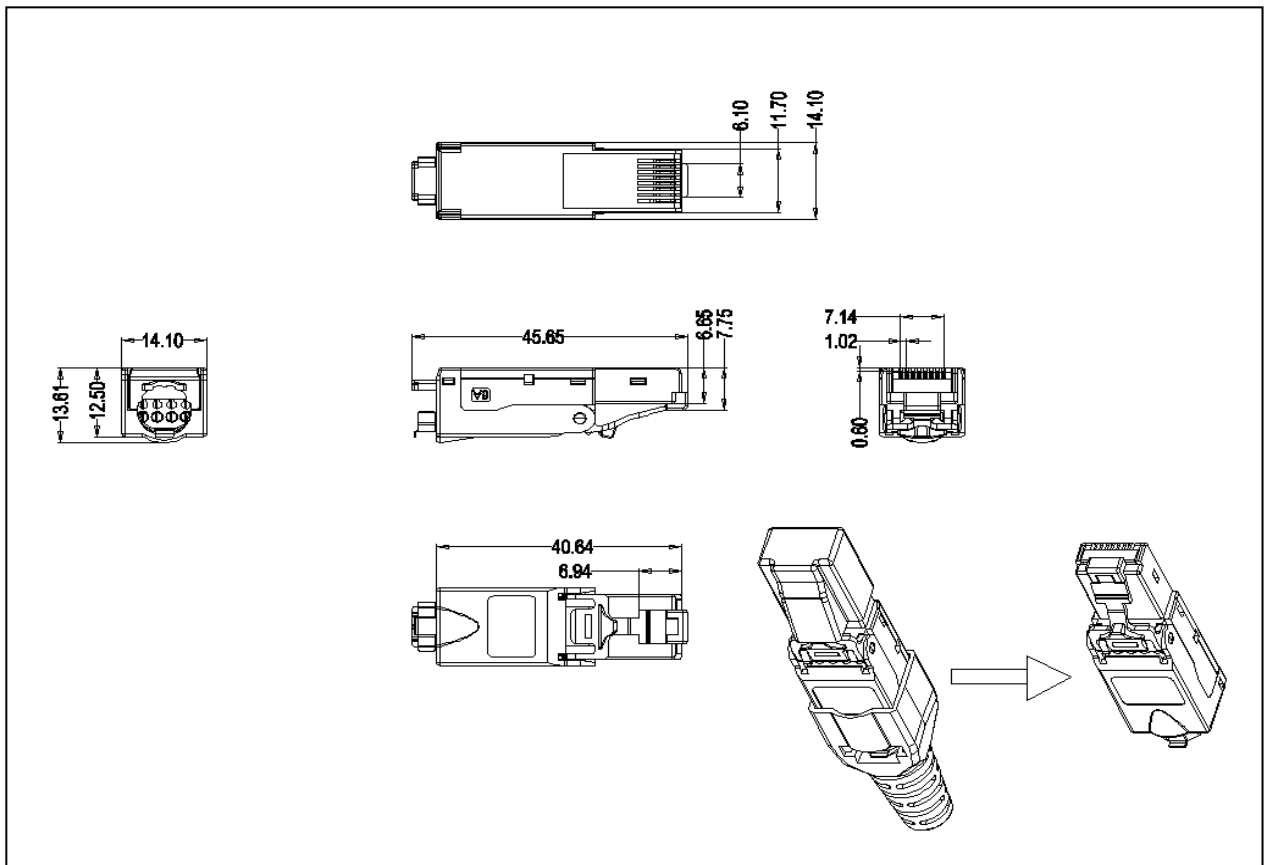

[Product Description]

- Surpass all CAT6A performance requirements,
- Comply with 10 Gigabit Ethernet application systems,
- Providing up to 550MHz available bandwidth,

[Technical Characteristics]

- Unique exterior design, compact and useful,
- Unique PCB circuit board design reduces EMI/RFI interference, low attenuation loss and high return loss
- Zinc alloy Shielding design meets the industry shielding standards,
- Solid and corrosion phosphor bronze DC ensures over 250 terminations,
- Matched with 23 AWG wires, phosphor bronze contact with 50 μ ” gold plate, with a durability of 1500 matching recycles.

Description	Paremeter
Contact resistance(max)	100m Ω
Insulation resistance (min)	500M Ω
Return loss (dB)	5.9dB

[Packaging]

PART #	Description	Color	Inner Box	Outer Box	CTN SIZE(L*W*H)	Weight
CN880351	C6A shielded plug keystone jacks	Silver	1PCS	250PCS	53.5*31.3*23.4	10kg