



CAT 6 UTP KEYSTONE JACKS

P/N: CN20061E

P/N: CN20061E

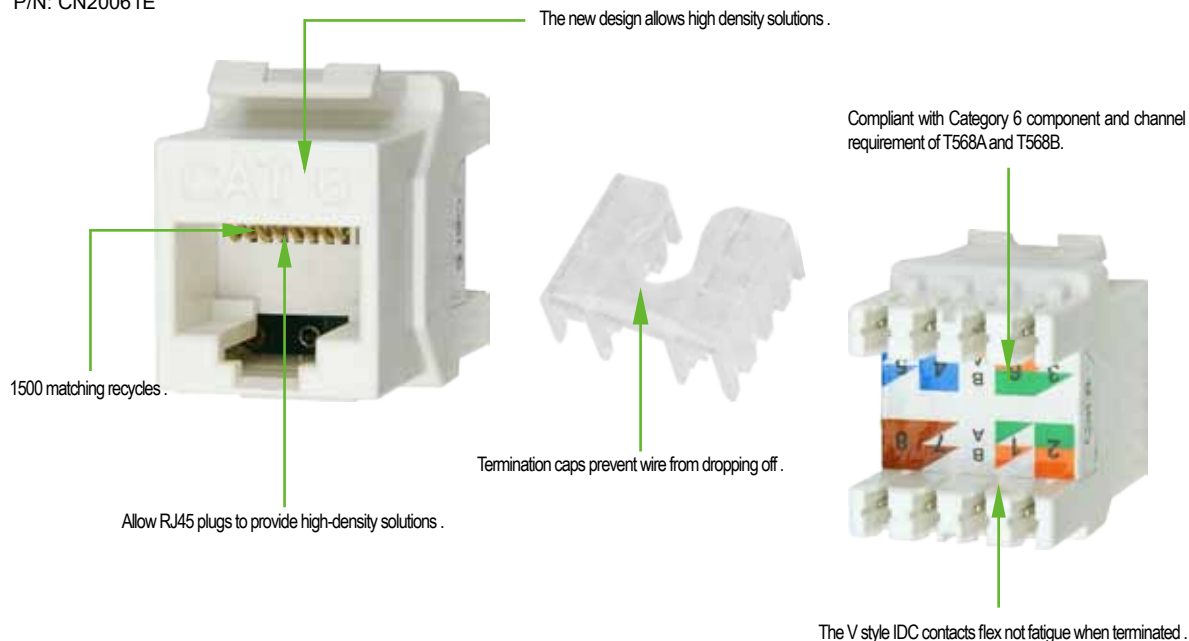

PRODUCT FIGURE

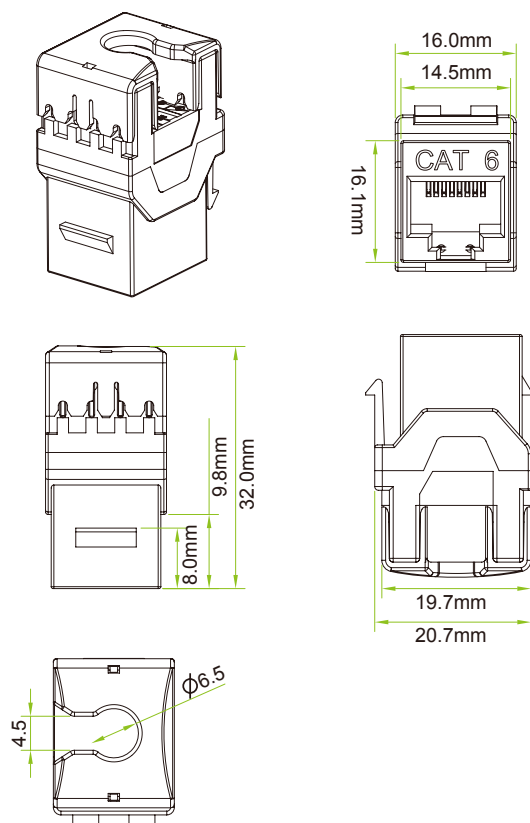

DESCRIPTION

This series keystone jacks work together with high speed cables, cords and panels to provide performance beyond proposed Category 6 standards, a new feature of this series jack is a universal colored wiring label that eliminates the need for separate codes for T568A/B wiring scheme.

APPLICATION

- Available in Cat6, T568A/B wiring, meet or exceed TIA/EIA Cat6 requirements
- Housing : high temperature thermoplastic
- Compact jack design, 8 positions and 8 conductors
- Contact : phosphor bronze , phosphor bronze with 6 to 50 μ gold plate
- Accept 22-26 AWG solid with a insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors

CONSTRUCTION

Description	Parameter
Contact resistance(max)	100m Ω
Insulation resistance (min)	500M Ω
Return loss (dB)	5.8dB
Next (dB)	4.7dB
Ps next(dB)	5.5dB

*Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

CAT 6 UTP KEYSTONE JACKS P/N: CN20061E

INSTALLMENT INSTRUCTIONS



View the color on the module to determine proper location of the conductors based upon preferred wiring scheme.



Fan out cables based on desired wiring scheme, cut the pair separator and rip cord(if present) as close as possible to the jacket. Note: Be careful not to nick conductors.



Insert each wire into the appropriate channel according to the color code on the module, keep the cable perpendicular to the block.



Terminate wires using Linkbasic tool (P/N: TLA11) or equivalent.



Install dust caps by snapping into place as shown. Note: The cable jacket should remain outside the dust caps as shown.



Install dust caps by snapping into place as shown.



Cat 6 UTP Keystone Jack (180°C)

ORDER INFORMATION

Part number	Description	Standard Color	Inner box	Carton	Carton measurement	Carton weight
CN20061E	Cat6 unshielded keystone jacks (180 degree)	White	25PCS	250PCS	L 53.5cm×W 31.3cm×H 23.4cm	3.80KG

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.