


## DATASHEET

### Outdoor Cable A-DQ (ZN)B2Y MM OM3

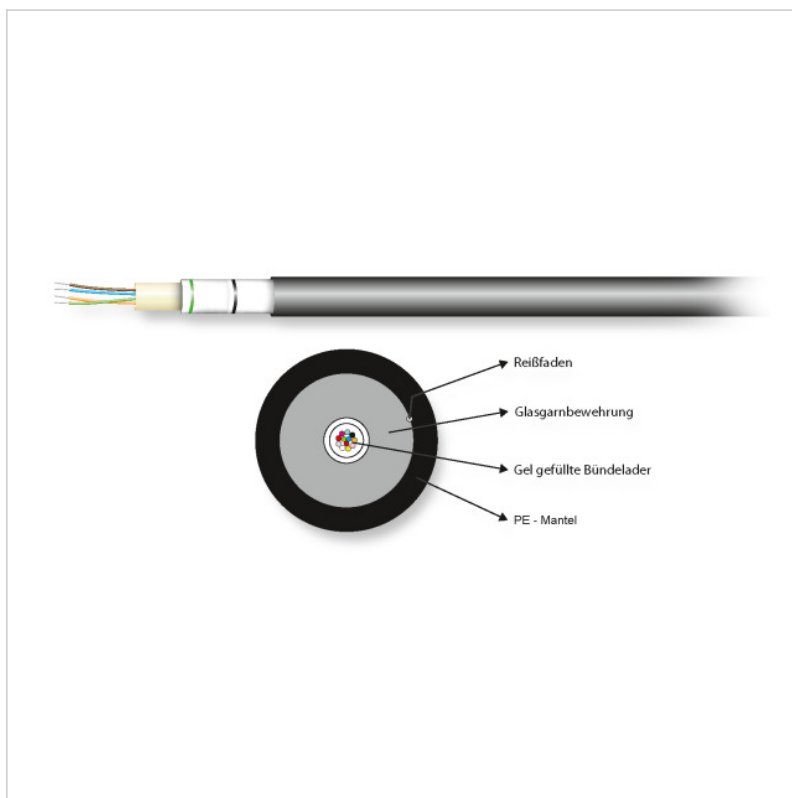

Outdoor  
Suitable for direct burial, duct or shaft installation  
Primary cabling (Campus), Backbone  
PE jacket black , non-metallic, longitudinal water tight  
UV resistant, rodent resistant  
Central/Loose tubes, 250µm coating. The cable diameter can vary.

|   |                  |
|---|------------------|
| <b>Fibre type:</b>                        | Multimode 50/125 |
| <b>Fibre category:</b>                    | OM3              |
| <b>Application:</b>                       | outdoor          |
| <b>Material outer sheath:</b>             | PE               |
| <b>Colour outer sheath:</b>               | black            |
| <b>Longitudinal water blocking:</b>       | True             |
| <b>Radial water blocking:</b>             | False            |
| <b>Cable metal free:</b>                  | True             |
| <b>Halogen free (acc. EN 50267-2-2):</b>  | False            |
| <b>Circuit integrity:</b>                 | No               |
| <b>Strain relief:</b>                     | True             |
| <b>Low smoke (acc. EN 61034-2):</b>       | False            |
| <b>Armouring:</b>                         | True             |
| <b>Oil resistant (acc. EN 60811-2-1):</b> | False            |
| <b>Flame retardant:</b>                   | No               |
| <b>Temperature Range (Operation):</b>     | -20..70 °C       |
| <b>Temperature Range (Storage):</b>       | -30..70 °C       |
| <b>Temperature Range (Installation):</b>  | 5.. 50 °C        |