

DATASHEET

DSub jacks, IDC contacts, flat version



Description

- Quality level III
- 50 mating cycles

General data

Model	jack (jack)
-------	-------------

Electrical characteristics

Contact type	female (female)
Connection type	other

Available variants



Article no.	Title	Number of poles	Type
CN9HP	Dsub Jack, IDC contacts flat version,E-DFF 09 LPIII/Z	9	EDFF 09 LPIII/Z
CN15HP	Dsub Jack, IDC contacts flat version,E-DFF 15 LPIII/Z	15	EDFF 15 LPIII/Z
CN25HP	Dsub Jack, IDC contacts flat version,E-DFF 25 LPIII/Z	25	EDFF 25 LPIII/Z
CN37HP	Dsub Jack, IDC contacts flat version,E-DFF 37 LPIII/Z	37	EDFF 37 LPIII/Z

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

DATASHEET

DSub jacks, IDC contacts, flat version

Technical drawings

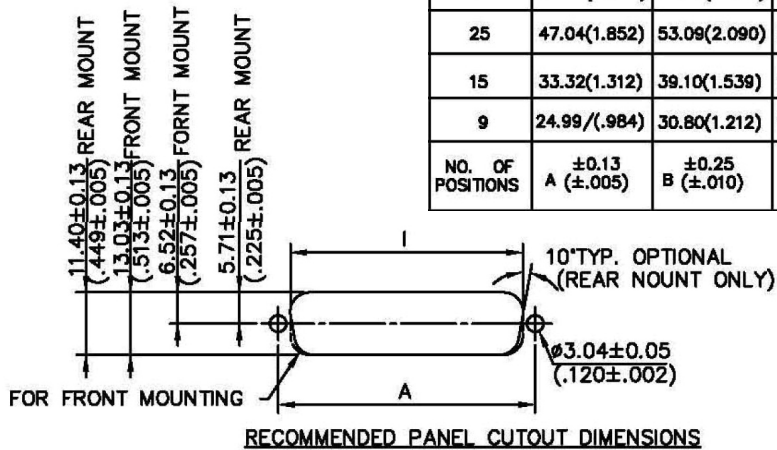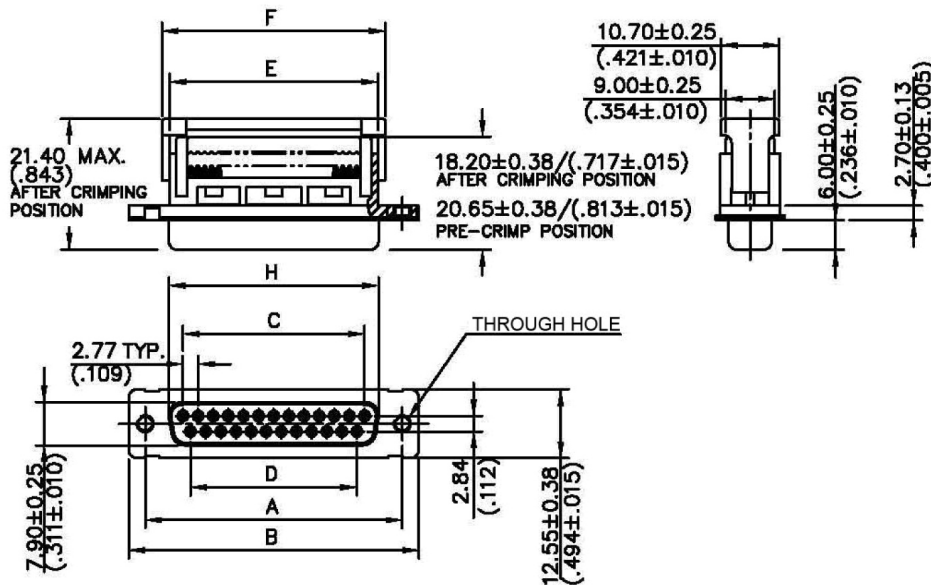

37	63.50(2.500)	69.40(2.732)	49.86/(1.963)	47.09/(1.854)	54.60/(2.150)	57.10/(2.248)
25	47.04(1.852)	53.09(2.090)	33.24/(1.309)	30.47/(1.200)	38.14/(1.502)	40.90/(1.610)
15	33.32(1.312)	39.10(1.539)	19.39/(.763)	16.62/(.654)	24.00/(.945)	26.60/(1.047)
9	24.99/(.984)	30.80(1.212)	11.08/(.436)	8.31/(.327)	16.10/(.634)	18.60/(.732)
NO. OF POSITIONS	A ±0.13 (±.005)	B ±0.25 (±.010)	C ±0.13 (±.005)	D ±0.13 (±.005)	E ±0.25 (±.010)	F ±0.25 (±.010)

54.84/(2.159)	59.08/(2.326)	60.73/(2.391)
38.38/(1.511)	42.52/(1.674)	44.27/(1.743)
24.66/(.971)	28.80/(1.134)	30.53/(1.202)
16.33/(.643)	20.47/(.806)	22.20/(.874)
H ±0.25 (±.010)	±0.13/(.005) REAR MOUNTING	±0.13/(.005) FRONT MOUNTING