





# Cables de conexión multimodo

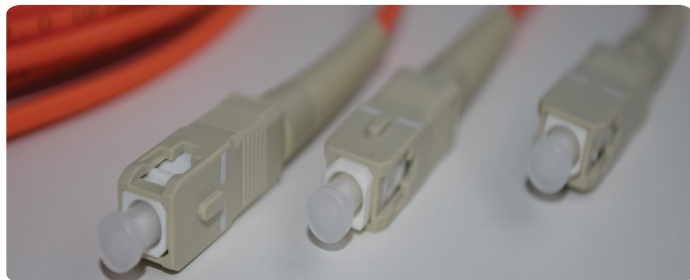

✓ Simplex y Duplex

✓ APC o UPC

✓ PVC / LSZH

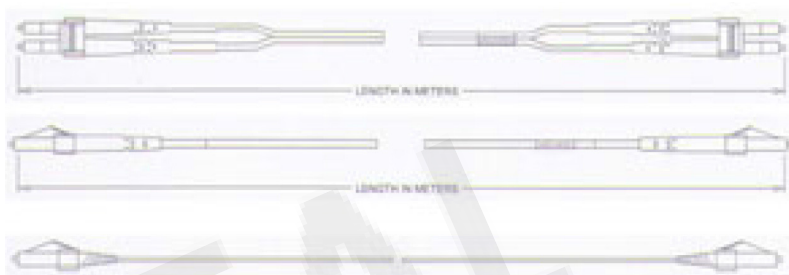

- Simplex y Duplex
- Longitudes estándar o personalizadas
- APC o UPC polaco
- Funda PVC / LSZH
- Supera los estándares de la industria de fibra óptica. 100% probado a mano y garantizado
- Entregado en longitudes especificadas por el cliente

## DESCRIPCIÓN

Connector Types	SC	LC	FC	ST
Fiber Type	62.5/125m	9/125m		50/125m
Max. Insertion Loss	≤0.3dB	≤0.2dB		≤0.3dB To
Typ. Insertion Loss	≤0.2dB	≤0.15dB		≤0.2dB
Typ. Return Loss	≥35dB	PC≥45dB UPC≥55dB APC≥60dB		≥35dB
Cable retention (900um)	2 lbs	2 lbs		2 lbs
Matung Durability (1000cycles)	<0.2dB	<0.2dB		<0.2dB
Ferrule Material	Ceramic	Ceramic		Ceramic
Housing Material	Composite	Composite		Composite
Operating Temperature (°C)	-40°C to +80°C	-40°C to +80°C	-40°C to +80°C	-40°C to +80°C

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

1. ALL CERAMIC FERRULES FOR MAXIMUM OPTICAL AND MECHANICAL PERFORMANCE.	OM-1 (62.5/125)	EN 50173-1, grey
2. ALL PATCH CORDS ARE 100% OPTICALLY INSPECTED AND TESTED WITH INDIVIDUAL LABELLING.	OM-2 (50/125)	EN 50173-1, orange
3. A VARIETY OF FIBER AND CABLE TYPES AVAILABLE. 4. A VARIETY OF BOOT STYLES AND COLORS AVAILABLE.	OM-3 (50/125)	EN 50173-1, turquoise
	OM-4 (50/125)	EN 50173-1, purple
5. CUSTOM PRINT LEGENDS AND JACKET COLORS AVAILABLE EIA/TIA COMPLIANT		

