


DATASHEET

Extension Cable C14 180° - C13 180°, black

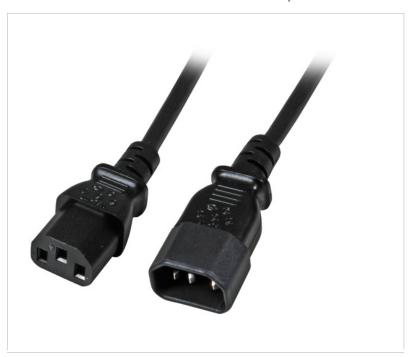

Plug IEC60320/C14 to jack IEC60320/C13 10 A / 250 V VDE tested Colour black International standardised connectors

Connection 1: Cold device plug (IEC

320)

Connection 2: Cold device plug

straight, female

Number of cores: 3
Material outer sheath: PVC
Temperature resistance: 0 - 70 °C
Nominal voltage: 250 V
Spiralized cable: False
Protective conductor: True
Oil resistant (acc. EN 60811-2-1): False
With cord switch: False

Article no.	Title	Nominal cross section conductor mm²	Colour outer sheath	Outer diameter approx. mm	Length m
CAB50305	Extension Cable C14 180° - C13 180°, black, 0.5 m, 3 x 0.75 mm²	0.75	Black	6.8	0.5
CAB5031	Extension Cable C14 180° - C13 180°, black, 1.0 m, 3 x 0.75 mm²	0.75	Black	6.8	1.0
CAB5032	Extension Cable C14 180° - C13 180°, black, 2.0 m, 3 x 0.75 mm²	0.75	Black	6.8	2.0
CAB5033	Extension Cable C14 180° - C13 180°, black, 3.0 m, 3 x 1.00 mm²	1.00	Black	7.1	3.0
CAB5035	Extension Cable C14 180° - C13 180°, black, 5.0 m, 3 x 1.00 mm²	1.00	Black	7.1	5.0

^{*}Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.