


VERSION	DATE	REMARK
A/0	2016.8.10	FIRST ISSUED

Performance Remark:

1. Environmental:
Compliant with RoHS and Reach
2. Electrical:
1) 250V AC max, at 2A
2) Dielectric withstanding 1000V DC/min, <0.5A
3) Insulation Resistance: >500MΩ, 1000V DC/min.
4) Contact Resistance: <20 MΩ
3. Mechanical:
1) Cable to plug tensile strength: 20lbs(89N)min.
2) Durability: above 750 mating cycles
4. Temperature for operation:
-40℃ to +125℃
5. Material:
Housing material: Polycarbonate UL94V-0 or 94V-2.
Color: transparent or colorful can be for choices.
Gold plating thickness: From gold flash to 50U" are all available.

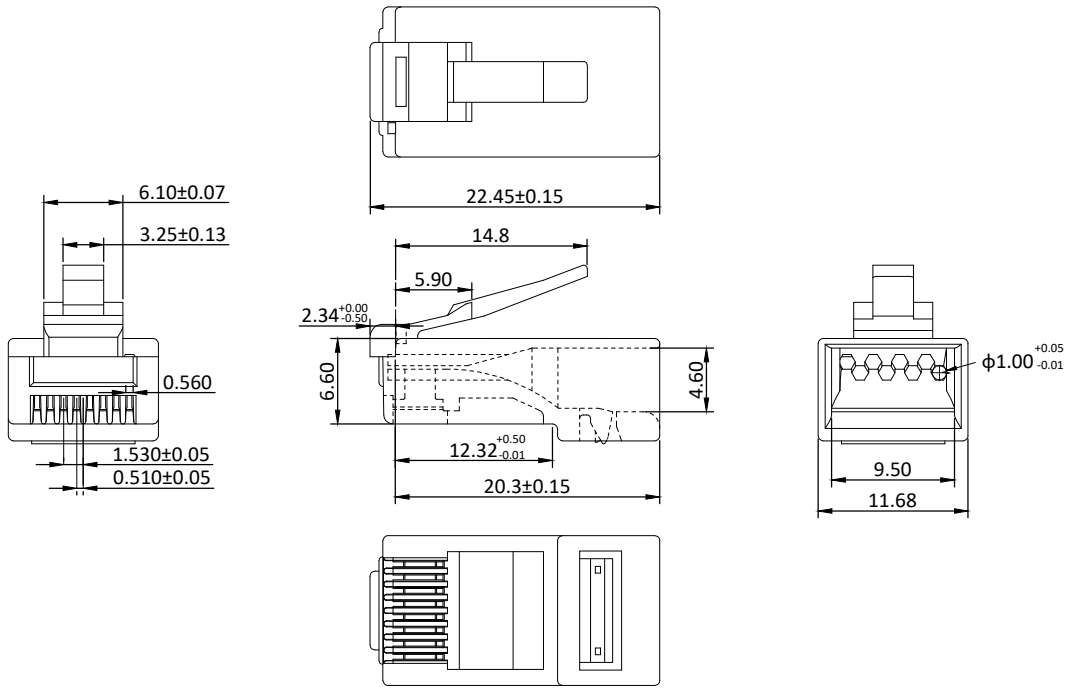

Blade	E	Y					OTHER
DRAWING							
MARK	✓						

GOLD PLATING	FMU"	3MU"	3U"	6U"	15U"	30U"	50U"	CABLE TYPE	ROUND	FLAT
MARK							✓	MARK		

IDEAL TECHNOLOGIES					
ITEM	Cat.6 UTP PLUG	DIMENSIONAL TOLERANCE		UNIT	mm
MATERIAL	PC	X.X±0.20	X.X°±5°	SCALE	NULL
DWG NO	CNRJ45C650	X.XX±0.10	X.XX°±2°	PORJ	
APPROVAL		CHECK		DRAW	
Jorge		Alfred			