

CABINET & ENCLOSURE

RCE CABINET

P/N:RCE

P/N:RCE



STANDARD

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard. Compatible with metric ETSI and 19 inch international standard.

FEATURES

- Exquisite design with precise craftsmanship.
- Adjustable and heavy duty castors are available at the same time. Static loading:300KG
- The top and bottom wiring channel can be closed and adjusted.
- Vented front door and rear door enable ventilation and reliable operation. Rack's side panel can be easily assembled.
- Surface finish: degreasing, pickling, phosphoric, powder coating.
- Height, width, and depth selectable, full range of optional accessories.

MATERIALS

Cold-rolled steel sheet. Thickness for frame 0.8mm, mounting rail 1.2mm, smoky grey glass 5mm.

APPLICATION

Widely used in network system, educational system, broadcasting system and telecommunication system. Suit for placing server computer and precision electronic equipments.



Crescent lock



asily assembled side panel



Symmetrical frame



Fixed shelf



Cooling fan



Bottom plate



Mounting rail with U mark




Rectangle venthole

CABINET & ENCLOSURE



RCE CABINET P/N:RCE

STRUCTURAL

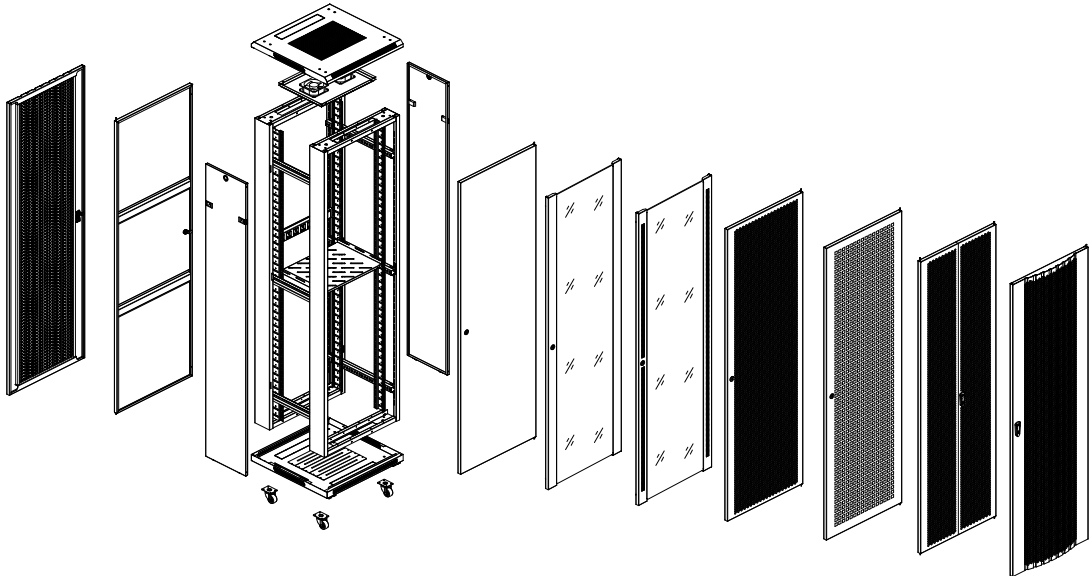

DIMENSION (MM)

mm Unit of Measurement:mm

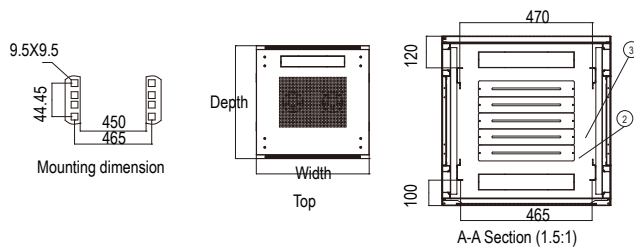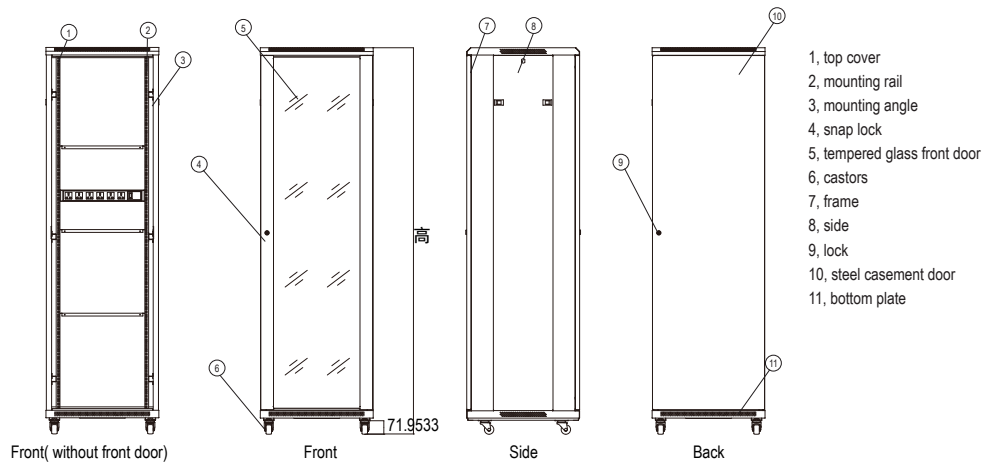

CABINET & ENCLOSURE

RCE CABINET P/N:RCE

STANDARD ACCESSORIES(NCE)

S/N	Specification	Qty	Unit	Material	surface finish	Remark
1	Top cover	1	Pcs	0.8mm cold rolled steel	Powder coated	---
2	rack	2	Pcs	0.8mm cold rolled steel	Powder coated	---
3	Front door	1	Pcs	0.8mm cold rolled steel	Powder coated	B type door
4	Side panel	2	Pcs	0.8mm cold rolled steel	Powder coated	With lock
5	Rear door	1	Pcs	0.8mm cold rolled steel	Powder coated	A type door
6	Lock	4	Pcs	---	---	---
7	Mounting rail	4	Pcs	1.2mm cold rolled steel	Powder coated	---
8	Mounting angle	6	Pcs	08mm cold rolled steel	Powder coated	---
9	Bottom plate	1	Pcs	0.8mm cold rolled steel	Powder coated	---
10	Fixed shelf	2	Pcs	1.2mm cold rolled steel	Powder coated	1pcs under 37u
11	Castors	4	Pcs	---	---	---
12	Feet	4	Pcs	---	---	---
13	Cage and nuts	40	sets	---	---	20pcs under 32u
14	Fan	4	Pcs	---	---	---
15	6way power strip	1	Pcs	---	---	---
16	wrench	1	Pcs	---	---	---

ORDER INFORMATION(RCE)

Part No	Capacity/U	Width/mm	Depth/mm	Height/mm	Carton measurement			Volume/CBM
					Width/m	Depth/m	Height/m	
RCE18-66-#☆	18U	600	600	988	0.63	0.63	1.02	0.40
RCE22-66-#☆	22U			1166			1.20	0.48
RCE27-66-#☆	27U			1388			1.42	0.56
RCE32-66-#☆	32U			1610			1.64	0.65
RCE37-66-#☆	37U			1833			1.86	0.74
RCE42-66-#☆	42U			2055			2.08	0.83
RCE47-66-#☆	47U			2277			2.30	0.91



CABINET & ENCLOSURE

RCE CABINET P/N:RCE

RAMARKS

* = Front door # = Rear door


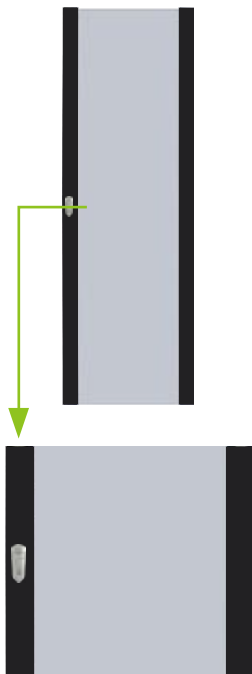
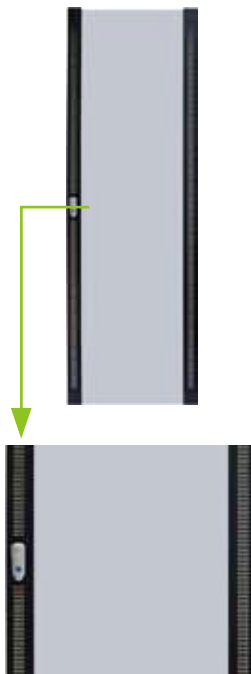
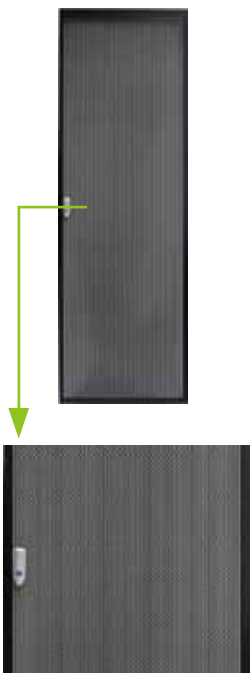
COLOR

☆ = Colors

A= Black(RAL9004)

B=Gray(RAL7044)

DOORS

A= steel casement door	B= smoky-gray glass door	C= Smoky-gray glass door with frame punched	D= Perforation steel door
			

CABINET & ENCLOSURE

RCE CABINET P/N:RCE

F= double swing steel door (perforated)	H= curved concavo-convex perforation steel door (hexagonal Type)	I= concavo-convex perforation steel doo (hexagonal Type)
 	 	 

CABINET
CABINET & ENCLOSURE

