


DATASHEET

U-DQ(ZN)BH 50/125μ OM3

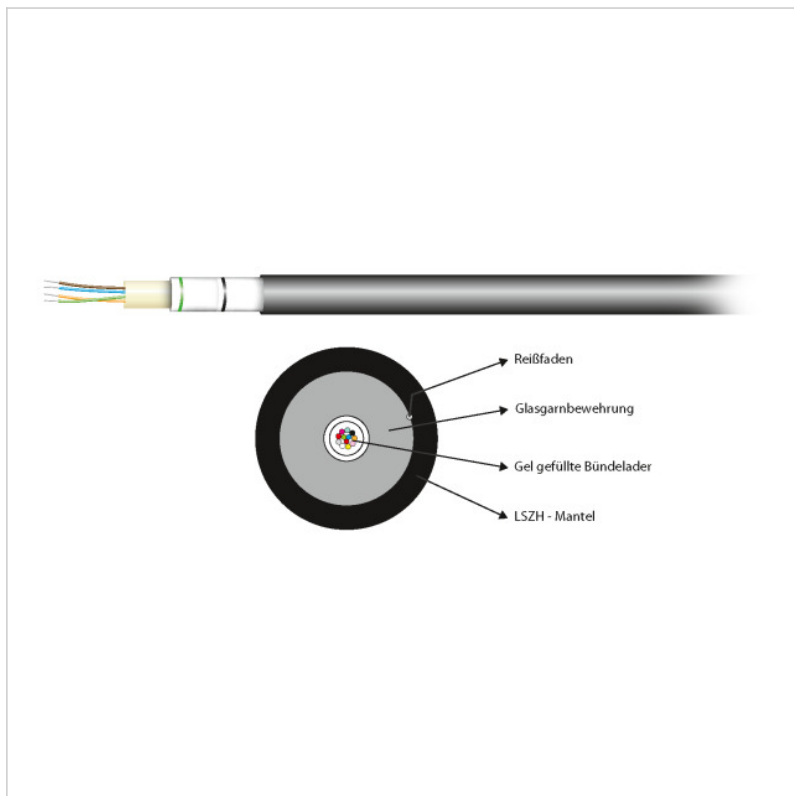

Indoor- and outdoor application
 Installation in conduits and shafts
 Primary cabling (campus): backbone
 Secondary cabling (vertical): riser area (backbone)
 Universal cable LSZH black, non-metallic, longitudinal water tight
 halogenfree, rodent resistant
 Central/Loose tubes, The cable diameter can vary.

Fibre type:	Multimode 50/125
Fibre category:	OM3
Application:	indoor/outdoor
Material outer sheath:	LSZH
Colour outer sheath:	black
Longitudinal water blocking:	Ja
Radial water blocking:	Nein
Cable metal free:	Ja
Halogen free (acc. EN 50267-2-2):	Ja
Circuit integrity:	No
Strain relief:	Ja
Low smoke (acc. EN 61034-2):	Ja
Armouring:	Ja
Oil resistant (acc. EN 60811-2-1):	Nein
Flame retardant:	According to EN 60332-1-2
Temperature Range (Operation):	-20..75 °C
Temperature Range (Storage):	-25..70 °C
Temperature Range (Installation):	-5..50 °C
With rodent protection:	True
Resistant to chemicals:	False