

DATASHEET


USB2.0 Connection Cable Type A Plug to A Plug, black, Classic




USB2.0 CLASSIC

Supports data transmission rates up to 480 Mbit/s. Wire construction: AWG28 / AWG24. Shielded: folie + braiding. Plug moulded.

Type of connector connection 1:	USB-A
Number of poles connection 1:	4
Connection type connection 1:	plug
Type of connector connection 2:	USB-A
Number of poles connection 2:	4
Connection type connection 2:	plug

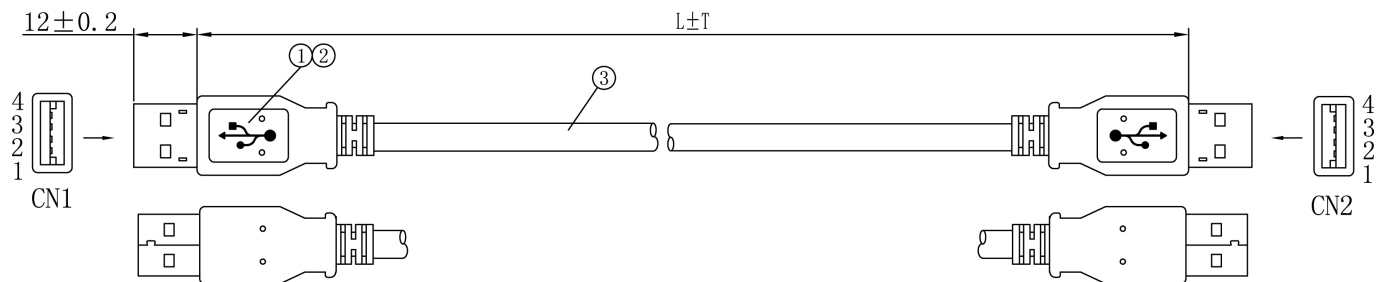

PIN OUT



BLACK	
ITEM NO.	LENGTH
K5253SW. 0, 5	500±5mm
K5253SW. 1, 0	1000±10mm
K5253SW. 1, 5	1500±15mm
K5253SW. 1, 8	1800±18mm
K5253SW. 3, 0	3000±30mm
K5253SW. 5, 0	5000±50mm

NOTE:

- 1.PRINTING: AWM 80° C 30V VW-1 28AWGx1P
24AWGx2C USB2.0 HIGH SPEED CABLE
- 2.RoHS compliant.
- 3.Operating Temperature: -15℃-80℃

3	CABLE	28AWG*1P+24AWG*2C+AL+B USB2.0 HIGH SPEED CABLE JACKET:PVC/BLACK OD: 4.5±0.2mm	1
2	OVERMOLD	PVC COLOR:BLACK	2
1	CONNECTOR	USB A TYPE MALE,NICKEL PLATED SHELL, 1U" GOLD PLATED PIN,WHITE INSULATOR	2 Set
NO.	MAT. NAME	DESCRIPTION	Q' TY