The Sixth International Conference on City Logistics

Two-Echelon Vehicle Routing Problem: A satellite location analysis

Teodor Gabriel Crainic [a,b*], Guido Perboli [a,c], Simona Mancini [a,c], Roberto Tadei [c]

[a]*CIRRELT, Université de Montréal, C.P. 6128, succ. Centre-ville Montréal (Québec) Canada H3C 3J7*
[b]*École des sciences de la gestion, UQÀM, C.P. 8888, succ. Centre-ville, Montréal (Québec) Canada H3C 3P8*
[c]*Politecnico di Torino, Corso Duca degli Abruzzi 24, Torino, 10129, Italy*

Abstract

In this paper, we address the Two-Echelon Vehicle Routing Problem (2E-VRP) in which freight is delivered from depots to intermediary satellites, from where it is delivered to customers. Different from other multi-level problems, the focus in 2E-VRP is on the global routing costs of the overall network. 2E-VRP has been recently introduced and, to our knowledge, there are no studies of the impact of instance parameters on the global cost. We present the results of a broad experimental study aimed at analyzing the impact on the total distribution cost of several parameters including customer distribution, satellites-location rules, depot location, number of satellites, mean accessibility of the satellites, and mean transportation cost between the satellites and the customers.
© 2010 Elsevier Ltd. Open access under CC BY-NC-ND license.

Keywords: Vehicle Routing; City Logistics; Two-Echelon distribution; experimental study; parameter impact

1. Introduction

In Multi-Echelon Vehicle Routing Problems, the delivery from one or more depots to customers is managed by routing and consolidating the freight through intermediate depots called satellites.

This family of problems differs from multi-echelon distribution systems present in the literature, which focus on the utilization of facilities and the flow assignment between levels, while the management of the fleet and the global routing of vehicles in the system are key elements in the case we consider. This approach is strongly connected to the design of City Logistics systems for large cities, where it provides the means to efficiently keep large trucks out of the city centre, with small and environment-friendly vehicles providing the last leg of distribution activities (Crainic et al., 2009; Benjelloun and Crainic, 2008).

In this paper, we address the basic, static version of the problem, denoted the *Two-Echelon Vehicle Routing Problem* (*2E-VRP*), characterized by a single depot and a given number of satellites (Perboli et al., 2008). The first level routing problem addresses the depot-to-satellites delivery, while the satellites-to-customers delivery routes are

---

Corresponding author. Tel.: +1-514-343-7143; fax: +1-514-343-7121.
E-mail address: TeodorGabriel.Crainic@cirrelt.ca.

to be built at the second level. We are given a homogeneous fleet of fixed dimension at each level, first-level vehicles have a larger capacity than second-level ones, and capacity limits exist for vehicles and satellites.

The 2E-VRP is quite new and there are not yet studies on the real advantages with respect to more standard distribution systems. In particular, to our knowledge, no study of the relationship between the customer distribution, the system layout, and the associated costs of the distribution system has yet been performed for such systems. Our goal is to address this issue through a comparison of the results provided by our approach to those of the single depot VRP strategy, and an analysis that considers the impact on the total cost of distribution of several parameters, directly correlated to the system layout: the number of customers, the number and location of satellites, the customer distribution, and the relationship between the first and second level costs.

We first present an analysis of the accessibility level and the mean transportation cost of the system. The results of a customer distribution and satellites location analysis on medium-size instances (50-100 customers) are presented next. Finally, we present results obtained on large-size instances (150-200 customers), where we consider variable density customer distributions determining the location of satellites.

2. Problem Statement

In the 2E-VRP, the delivery from the depot to customers is managed by routing and consolidating the freight through intermediate depots called satellites. From a physical point of view, freight in 2E-VRP is delivered as follows:

- Freight arrives to the depot, where it is consolidated into 1st-level vehicles;
- Each 1st-level vehicle travels to a subset of satellites, and then returns to the depot;
- At each satellite, freight is transferred from 1st-level vehicles to 2nd-level vehicles;
- Each 2nd-level vehicle starts from a satellite, performs a route to serve the designated customers, and then returns to the same satellite for its next cycle.

The goal is to serve customers by minimizing the total transportation cost, and satisfying the capacity constraints of the vehicles and satellites.

Vehicles used at a given level have the same capacity. We consider a single depot and a fixed number of capacitated satellites. All customer demands are fixed and known in advance and must be satisfied. No time windows are defined for deliveries or satellites. For the 2nd level, the demand of each customer is smaller than the vehicle capacity and demands cannot be split. For the 1st level, two complementary distribution strategies are considered. In the first case, each satellite is served by just one 1st-level vehicle and the demand passing through the satellite cannot be split into different vehicles. In this case, the capacity of the 1st-level vehicles has to be greater than the demand of each satellite. In the second case, a satellite can be served by different 1st-level vehicles, so each satellite demand can be split.

This approach is strongly connected to City Logistics for large urban zones (Crainic et al., 2009; Benjelloun and Crainic, 2008). Such two-tiered City Logistics systems build on and expand the City Distribution Centre (CDC) idea. CDCs form the first level of the system and are located on the outskirts of the urban zone. The second tier of the system is constituted of satellite platforms, where the freight coming from the CDCs and, eventually, other external points may be transferred to and consolidated into vehicles adapted for utilization in dense city zones. In the more advanced systems, satellites do not perform any vehicle-waiting or warehousing activities, vehicle synchronization and cross-dock transhipment being the operational model. Urban vehicles (e.g., trucks or tramways) move freight to satellites, possibly by using routes specially selected to facilitate access to satellites and reduce the impact on traffic and the environment. They may visit more than one satellite during a trip. Their routes and departures have to be optimized and coordinated with satellite and city freighter access and availability. City freighters are vehicles of relatively small capacity that can travel along any street in the city to perform the required distribution activities at the second level of the system. The Amsterdam CityCargo system (http://www.citycargo.nl/) belongs to this class. There are still many open issues related to this problem, including most CDC and satellite location-related ones (see Crainic et al., 2004, for a pioneering but simple contribution).

The literature on the 2E-VRP is limited. A flow model for the 2E-VRP and some valid inequalities were presented by Gonzalez Feliu et al. (2008) and instances up to 20 customers were solved to the optimum. The model

was able to find feasible solutions for instances up to 50 customers. Perboli et al. (2008) introduced two math-heuristics able to address instances up to 50 customers.

The fast clustering heuristic of Crainic et al. (2008) provides the means to address larger instances (up to 250 customers). In this method, the first and the second levels are considered separately. Customers are first assigned to the nearest available satellite, then the second level problem is split into several single-depot VRPs, one for each satellite, where the satellite is considered as depot and only the customers assigned to that satellite are considered as customers. The second level solution is used as input for the first level problem, which is treated as a split delivery VRP, where the satellites are considered as the customers of the depot. The demand of each satellite is computed as the sum of the demands of the customers assigned to it.

A general time-dependent formulation with fleet synchronization and customer time windows was introduced by Crainic et al. (2009) in the context of two-echelon City Logistics systems. The authors indicated promising algorithmic directions, but no implementation was reported.

We used the fast clustering heuristic of Crainic et al. (2008) to perform our experiments. The goal of the experimentation is twofold. First, perform an analysis of the impact on algorithmic efficiency and solution quality of different customer distributions, satellite-location patterns, and depot locations. Second, qualify the performances of the heuristic by Crainic et al. (2008) for the 2E-VRP.

Dispatcher, a heuristic-based commercial software developed by ILOG (2005), and a Branch & Cut algorithm (Ralphs et al., 2003) truncated to 10 seconds CPU time were used to address the capacitated VRPs. Notice that, on the relatively small instances solved by Branch & Cut, Dispatcher's solutions displayed an optimality gap of some 1% only. We therefore used this method to address larger instances. On the other hand, truncating the Branch & Cut yields a lower bound on the optimal solution value of the capacitated VRP.

3. Experimental Framework

In this section, we define and analyze the accessibility index and the mean normalized transportation cost. A number of experimental results are reported to support this analysis.

An *accessibility index* is defined for each satellite as follows (Hansen, 1959):

$$A_k = \frac{1}{|V_c|} \sum_{i \in V_c} \frac{d_i}{d_{max}} e^{-\beta \frac{c_{ki} - c_{min}^2}{c_{max}^2 - c_{min}^2}},$$

(1)

where d_i is the demand of customer i, d_{max} *is* the maximum demand over all customers, c_{ki}, stands for the transportation cost between satellite k and customer i, c_{min}^2 and c_{max}^2 are the minimum and maximum values of the 2nd-level transportation costs at the respectively, V_c is the number of customers, and $\beta > 0$ is a parameter to be calibrated representing the travelling impedance (we assumed $\beta = 0.1$).

The accessibility index gives a measure of the location of a satellite with respect to the customer distribution. Customers with larger demands have a greater impact on the index value, reflecting their potentially more crucial role in the solution computation and the system performance. A second measure of the location of a satellite is its *normalized transportation cost*:

$$\overline{c}_k = 100 \frac{c_{0k} - c_{min}^1}{c_{max}^1 - c_{min}^1},$$

(2)

where c_{0k} is the transportation cost between the depot and the satellite k, and c_{min}^1 and c_{max}^1 are the minimum and maximum values of the transportation costs of the 1st-level, respectively.

The first set of instances (Gonzalez Feliu et al., 2008) is made out of 66 small-sized instances with 1 depot, 12 customers and 2 satellites sited at customer locations, each instance displaying a different satellite-location combination (such a satellite-location case is quite common in the distribution industry, e.g., grocery distribution). When a node is both a customer and a satellite, the arc cost c_{ki}, is set to 0. The number of vehicles for the 1st-level is set to 2 and to 4 for the 2nd-level. The capacity of the 1st-level vehicles is 2.5 times the capacity of the 2nd-level

vehicles. The loading/unloading cost is set to 0, while arc costs are equal to their lengths. These instances were solved by the method of Gonzalez Feliu et al. (2008).

We solved all the pairs of customers as possible satellite location and contrasted the results with the optimal solution of the original VRP instance (without satellites and with optimum equal to 290). We report in Figure 1 the dispersion of the optima of the 66 instances with respect to the mean transportation cost from the depot to the satellites, and the mean accessibility index of the satellites.
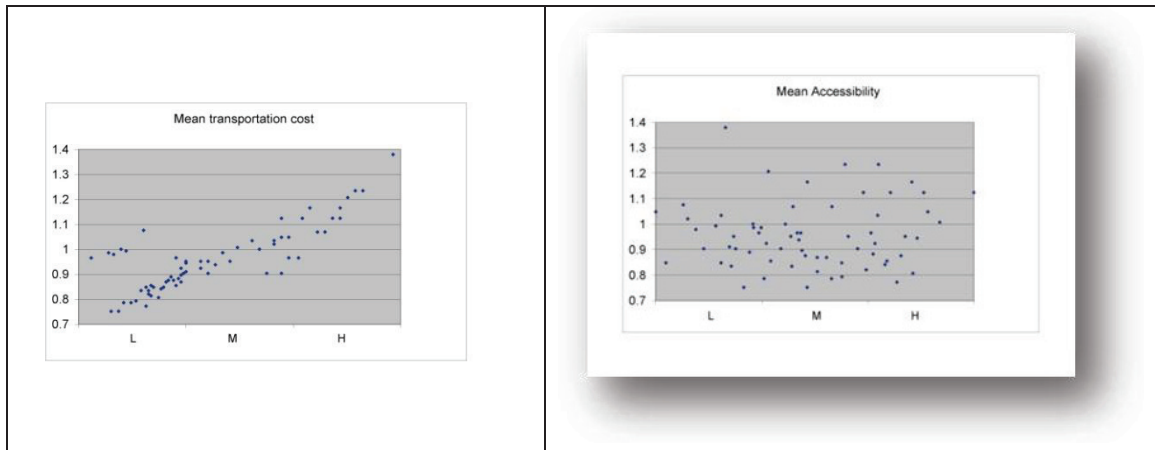
Figure 1 12-customers instances: dispersion of travelling costs and accessibility

The mean transportation costs are grouped into three sets: *Low* with costs in the [0,50] interval; *Medium* for [50,67]; and High for [67,100]. The mean transportation costs are plotted on the X axis of the left display of Figure 1, while the ratio between the optima of the 2E-VRP and VRP instances is plotted on Y axis (a ratio greater than 1 means that the optimum of the 2E-VRP instance is worse than that of the VRP one). The graph indicates that the instances with an optimum better than that of the VRP are characterized by a low mean transportation cost from the depot to the satellites. The greater this cost, the less likely it is to obtain an improved optimum. On the other hand, because it appears possible to obtain a gain even when it is high, the mean transportation cost from the depot to the satellites is not the only parameter to be taken into account.

The right display of Figure 1 thus addresses the mean accessibility index of the satellites. Given $A_{min} = \min_k\{A_k\}$ and $A_{max} = \max_k\{A_k\}$, the satellites are grouped into three sets: *Low* (L), *Medium* (M) , and *High* (H) with mean accessibility in the first, second, and third thirds of the $[A_{min}, A_{max}]$ interval. The X axis displays the mean accessibility index, while the Y axis indicates the same ratio between the optima of the 2E-VRP and the VRP instances as before. The display indicates that two-echelon systems tend to gain when the accessibility increases. It also indicates, however, that this is not the only factor explaining the performance of the system.

Table 1 presents a summary of the results: the accessibility values are given in the rows and the transportation cost in the columns. Each cell contains the number of instances with an objective function better/worse than the one of the capacitated VRP. These results show that a two-echelon system gives its best results when the mean transportation cost to satellites is less than 50% of the maximum transportation cost (low transportation cost), with the ratio between gain and loss decreasing while the accessibility index decreases. When the mean transportation cost is medium, the costs of using the satellites are lower than for the single-echelon system, which means that the quality of the result is mainly related to the dispersion of the customers, while with low accessibility it is difficult to obtain a gain on the total cost. With a high mean transportation cost, it becomes hard to obtain a lower transportation cost for the two-echelon system, even in presence of a high accessibility index. This is mainly due to the fact that even when the satellites are placed in the neighbourhood of the customers, they are usually near the border of the customer area, so the transportation cost paid in the 1st level to reach the satellites is not compensated by the gain due to the proximity of satellites to customers and the consequent reduction of the 2nd-level fleet routes. In general, however, this experiment supports the idea of a benefit in using a 2E-VRP distribution model instead of a VRP one.

Table 1 Summary of results for 12-customer instances

Accessibility	Transportation cost		
	L	M	H
H	8/10	2/4	0/4
M	15/1	5/0	0/6
L	11/1	3/4	1/1

4. Satellite and Customer Distribution Analysis

The second set of experiments was performed on medium-size instances obtained by combining different customer and satellite distributions, and varying the number of satellites. We generated sets of instances with 50 and 100 customers, combining three customer distributions and three satellites location patterns (see Figure 2), with 2, 3, and 5 satellites. Two instances were generated for each combination, for a total of 54 instances with 50 customers and the same number with 100 customers. In all cases, the region where customers are located was represented as a square of 100 x 100 space units and the depot was randomly located within a 100 x 50 rectangle placed 50 space units above the customer square.

The three customer distribution patterns are:

i. *Random* to represent a regional distribution. The X and Y coordinates of customers were randomly chosen with a [0,100] uniform distribution;

ii. *Centroids* to represent downtown and suburb zones in a large city. The downtown zones were represented as a 40 x 40 square located in the centre of the big square standing for the city, while four 20 x 20 squares placed in the corners of the large square represented the suburbs. Six customer centroids were located within the central zone and one for each corner zone. An imaginary circle of 10 space-units radius was drawn around each centroid and a fixed number of customers were randomly located within each. The number of customers around each centroid depended on the total number of customers and was given by an integer approximation of the ratio, customers/number of centroids;

iii. *Quadrants* to simulate the case of small towns located on the side of a river, a major route, or in a valley, where customers are clustered into large zones (e.g., on the sides of the river, etc.). The square standing for the zone of possible customer locations was divided into four quadrants. A customer was randomly located in each quadrant in a position allowing a 20 space-unit-radius circle around it completely within the square. A fixed number of customers given by an integer approximation of the ratio customers/number of quadrants was then randomly located within each of these circles.

Satellite location can be constrained by various geographic, land-use or logistics restraints. To better understand the relations between these conditions and the performance of a two-echelon distribution system, three different satellite location patterns were considered (Figure 2):

i. *Random*. This pattern simulates a situation without constraints, in which satellites can be distributed all around the city. The satellites were thus randomly located in a ring 20 space-units thick around the customer location square. This may result in several satellites being located close to one another and a large zone of the city not receiving any satellite, a not so-enviable situation;

ii. *Sliced*. This pattern addresses the location issue identified previously. The ring around customers was divided into n slices, where n represents the number of satellites, and a satellites was randomly placed inside each slide;

iii. *Forbidden Zone*. Various conditions, e.g., the city is located near the sea or a mountain, may forbid the location of a satellite in given zones of the city. To recreate such cases, an angle Θ in the range [0, 360] was randomly chosen and satellites were not located in the part of the ring defined by that angle.
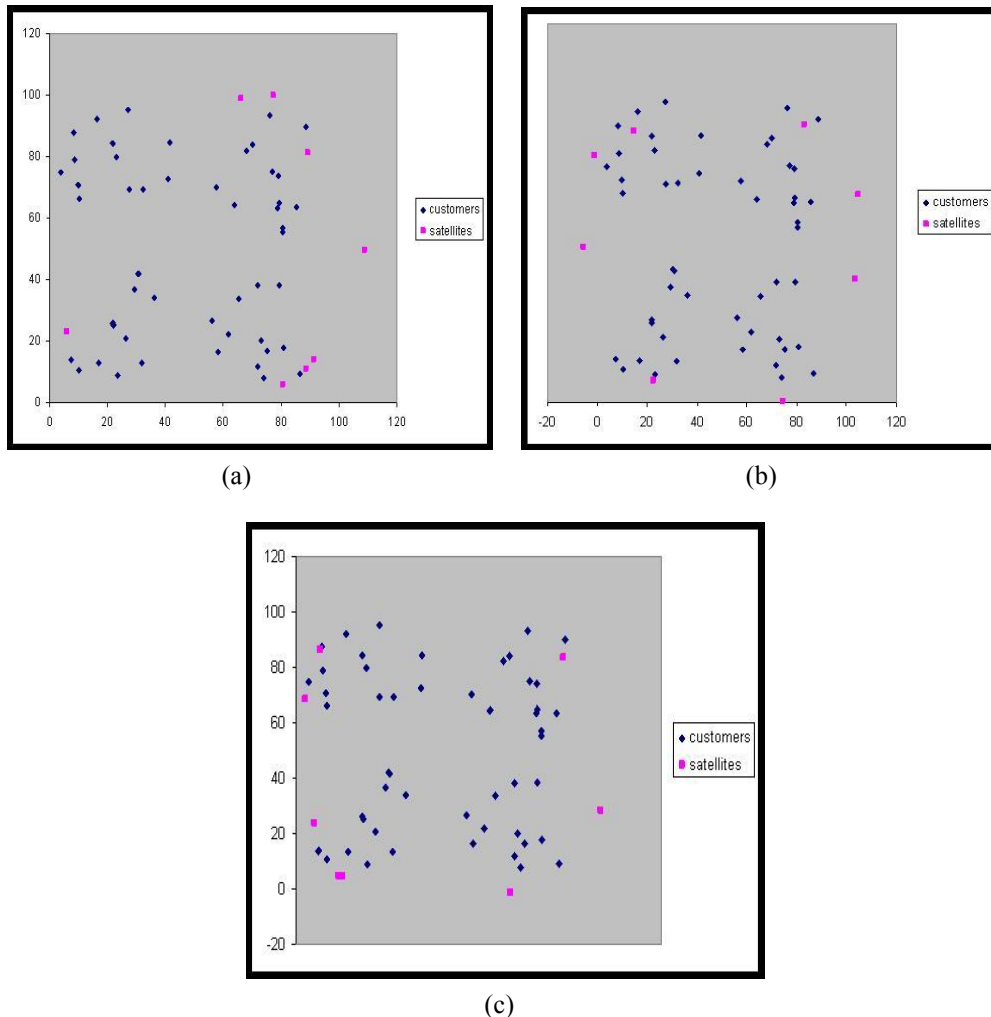
(a)

(b)

(c)

Figure 2 Satellites distributions (shown for quadrants customer distributions): random (a), sliced (b), forbidden (c)

Figures 3, 4, and 5 illustrate the behaviour of the solution quality with respect to the different customer distributions, satellite-location patterns, and number of satellites, respectively. Each figure reports the instance number on the X axis, while on the Y axis is given the percentage gap of each solution relative to the solution obtained with the best customer distribution, the best satellite location pattern, and the number of satellites minimizing the global cost, respectively. In Figure 5, we also give the result of the classical VRP as a measure of the impact of the satellite introduction on the global transportation costs. In Figure 3, numbers 1 and 2 on the X axis represent instances with random distribution, 3 and 4 with centroids distribution, 5 and 6 with quadrants distribution, while in Figure 4, number 1 and 2 represent instances with random satellite distribution, 3 and 4 with sliced distribution, 5 and 6 with forbidden distribution. Finally, in Figure 5, the first six instances reported on the X axis are related to random customer distribution, the second six to centroids distribution and the last six to quadrants distribution. Numbers 1, 2, 7, 8, 13, 14 represents instances with a random satellites distribution, numbers 3, 4, 9, 10, 15, 16 instances with a centroids satellites distribution and numbers 5, 6, 11, 12, 17, 18 with a quadrants one.

The results indicate that random-customer distributions yield worse performances than those obtained with the centroids and quadrants ones, independently of the number of customers and satellites. This was expected because customers are already clustered in the last two cases, which makes their assignment to satellites much easier compared to a completely random distribution.
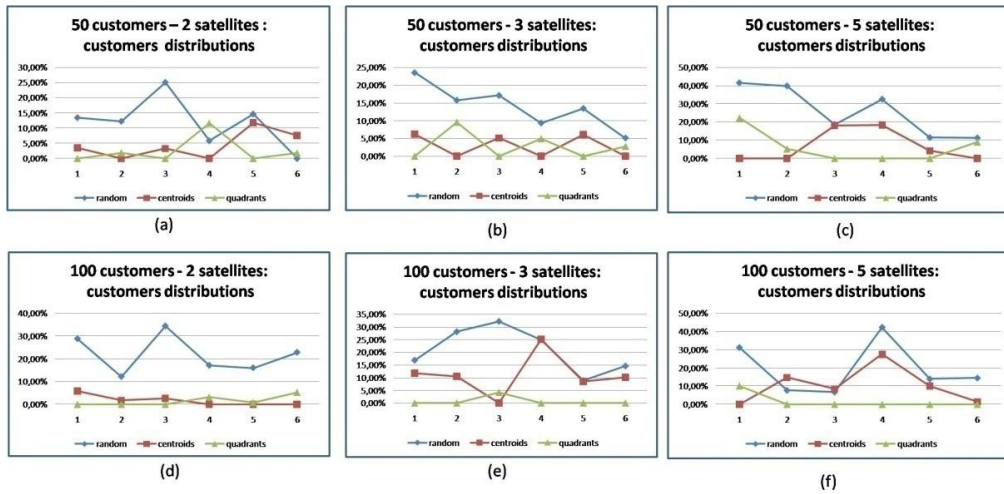
Figure 3 Comparison of results for different customer distributions
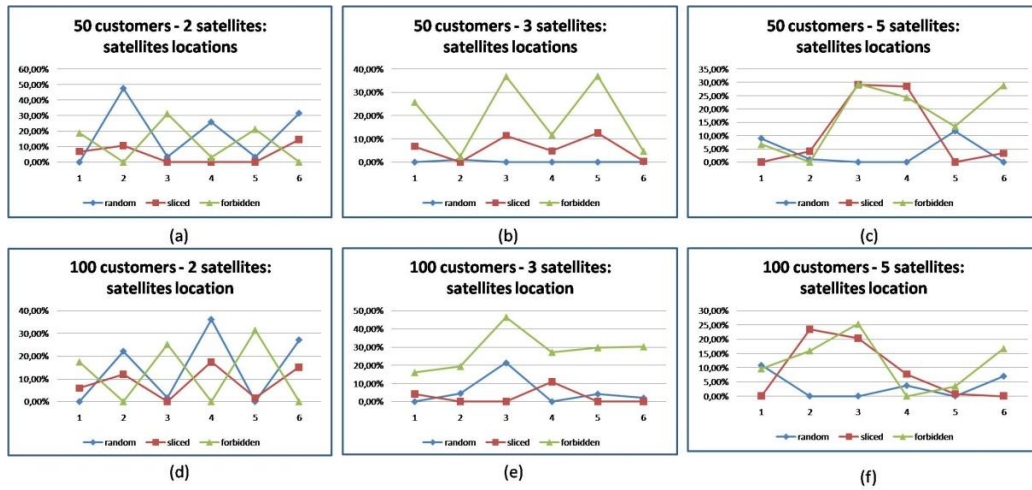
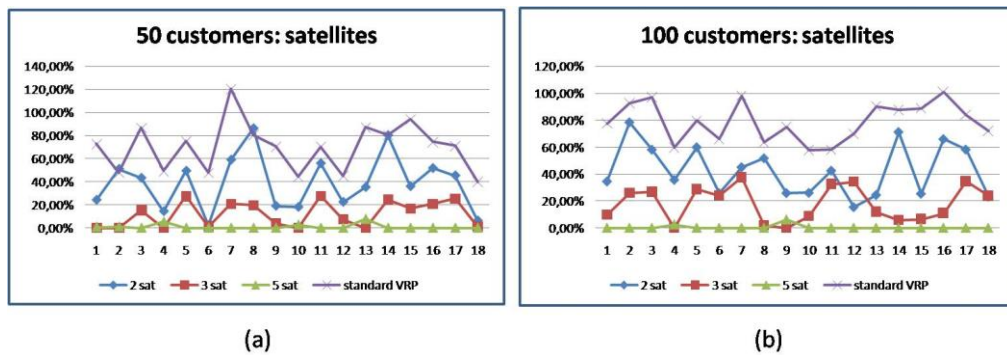Figure 4 Comparison of results for different satellite-location patterns

Figure 5 Comparison of results for different numbers of satellites

The best satellite location pattern appears to be the random one (Figure 4). This result may appear unexpected but it is not unreasonable. Indeed, the constraints on where one may locate satellites in the other patterns, e.g., the obligation to use each slice, may result in a satellite being located in a zone where it is useless. This tendency seems to become stronger when the number of satellites increases. Obviously, however, these results serve only to emphasize the need for a methodology to locate satellites in distribution systems with two-echelon routing according to the respective customer distribution.

As the Figure 5 illustrates, the use of satellites yields much better results than a standard VRP distribution. Increasing the number of satellites accentuates this result. For five satellites, for example, the cost of the two-echelon system is less than 50% of the cost of the standard approach. Of course, the appropriate number of satellites has to be determined using a formal model, which would balance the customer demand, the cost of transportation, and the costs to establish and operate satellites, but these results emphasize the interest of two-echelon models for situations with more than 50 customers.

5. Variable Density Customer Distribution and Smart Satellite Location

The third set of experiments addresses large size instances with variable-density customer distributions that influence the satellites locations, more satellites being located near the areas with high customer densities. Problem instances with 150 and 250 customers, 5, 7, and 10 satellites, and different depot locations were generated. Two instances were generated for each combination of parameters, for a total of 24 instances.

Instances were generated as follows. The square representing the customer area was split into four quadrants. Defining $m = n/10$, where n stands for the number of customers, four zones were defined and randomly associated to the quadrants: a *high-density* zone with $5*m$ customers, a *medium-density* zone with $3*m$ customers, and two *low-density* zones with m customers each. For instances with 10 satellites, 5 were randomly located in the high-density zone, 3 in the medium one, and 1 in each low-density zone. For each of these instances, corresponding 7 and 5-satellite instances were created, closing randomly 3 and 7 satellites, respectively.

Three depot-location configurations have been tested. (Figure 6). In the first configuration, the depot is located between 50 and 100 units beyond the upper frontier of the square (recall that the square is 100 x 100 units). The depot is located closer to the customers in the second configuration, in a layer between 0 and 20 units beyond the upper frontier of the square. Finally, in the third configuration, the depot is located inside the customer area, ± 25 units from the centre of the square. In all three configurations, the satellites were located around the customer sites.

Figure 7 reports the results obtained with this system design and the standard VRP on the 150 and 250 customers instances with a different number of satellites. The X axis corresponds to instances, (the first two with an external depot location, the second two with a border depot location, and the last two with a central one), while the Y axis indicates the gap in percentage relative to the best solution.

On both sets of instances, the standard VRP provides better results on average in the most cases, which recalls that additional operations may increase the cost of distribution. Comparing the performances with varying numbers of satellites, one notices that increasing this number is generally beneficial up to a point: 7 for 150-customer instances and 10 for the 250-customer ones, which is in the range of 20 to 25 customers on average to be services from each satellite.

These results must be analyzed within the context of their system design, however. Thus, it is obvious that going from the depot to satellites sited beyond the customer locations and then returning (case (c)) will greatly increase the length of transportation and the associated cost. Location of satellites "close" to customers and somewhat "between" these and the depot appears more intuitively natural. This is particularly the case in two-tiered City Logistics systems (Crainic et al., 2009). We have therefore performed the same analysis with a modified depot and satellite distribution, illustrated in Figure 8.
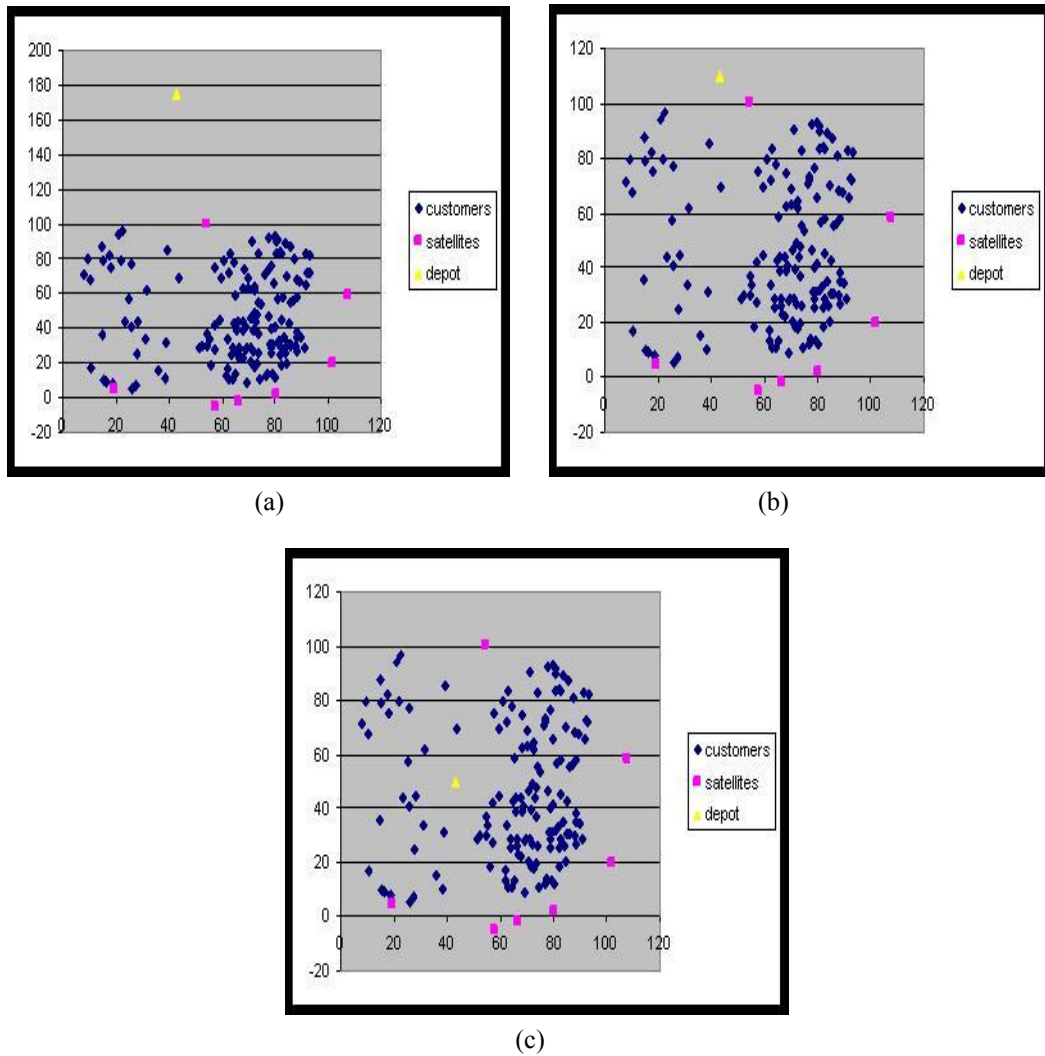
(a)

(b)

(c)

Figure 6 Different depot locations: external (a), border (b) and central (c)
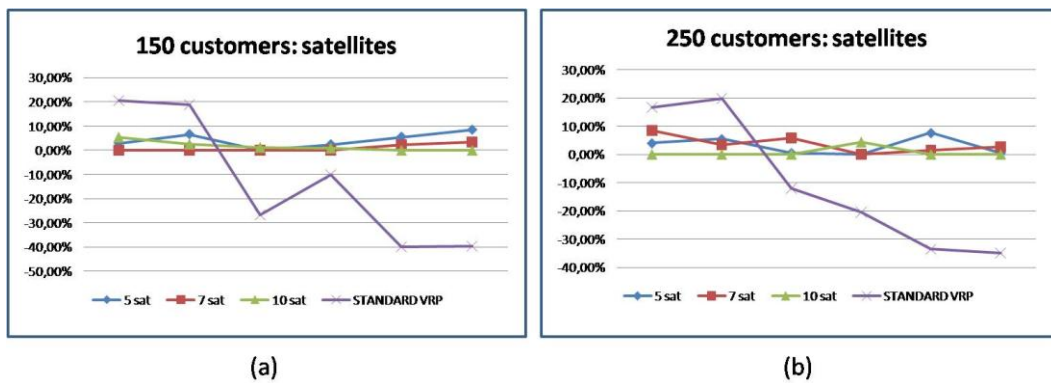

(a)

(b)

Figure 7 Comparison of different numbers of satellites and standard VRP
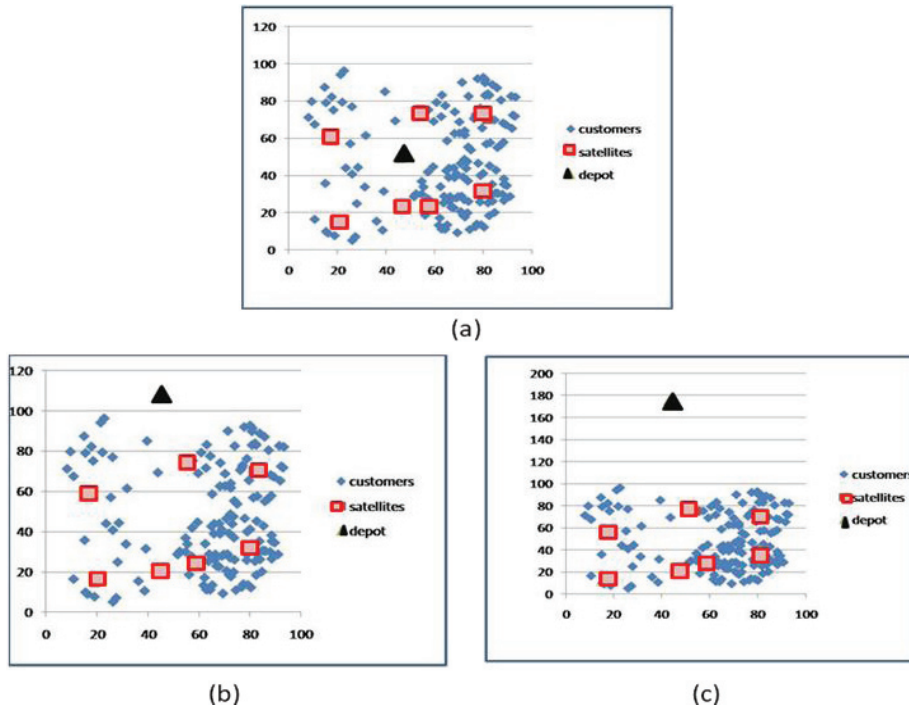
Figure 8 Different depot locations: central (a), border (b) and far (c)

Figures 9 and 10 report the results obtained with this second system design and the standard VRP on the 150 and 250 customers instances with different number of satellites. The former aggregates results by deport location, the first two points on X axis corresponding to instances with an external depot location, the second two with a border depot location, and the last two with a central one. The Y axis indicates the gap in percentage relative to the best solution. The average gaps for each number of satellites are also indicated. Figure 10 focuses on the depot locations, the first two points on the X axis corresponding instances with 7 satellites, the second two with 10, and the last two with 5. The Y axis gives the value of the objective function obtained for each depot location. Two results are given for each depot location: one considering the two-echelon approach (external, border and central) and one for the standard VRP approach (external VRP, border VRP and central VRP).

As expected, the lowest cost is obtained on instances with a central depot, then follow the instances where the depot is situated on the border of customers location area, and finally the external ones. In the latter case, a two-echelon system gives sensibly better results (around 60%) than the standard setup. When the deport is located close to the border, the average gain of using a two-echelon approach is around 30%, while with a central depot results are comparable, even though a two-level approach appears preferable, particularly when the number of customers increases. This emphasizes the potential benefit of two-echelon City Logistic systems for large urban areas where distributions centres are far from the controlled zone.

Note that, the accessibility index is not relevant for these instances. In fact, the rule used to locate the satellites ensures a high accessibility index for all instances. The normalized transportation cost of the satellites heavily affects the quality of the final solution. In fact, the instances with a high normalized transportation cost present a global transportation cost which is almost double that of the instances with the same customer distribution, but with a low normalized transportation cost.
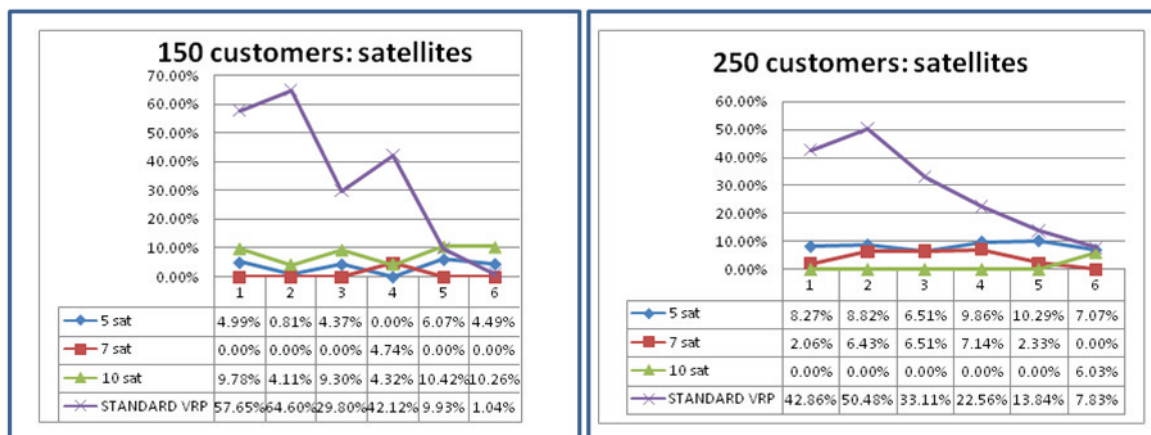
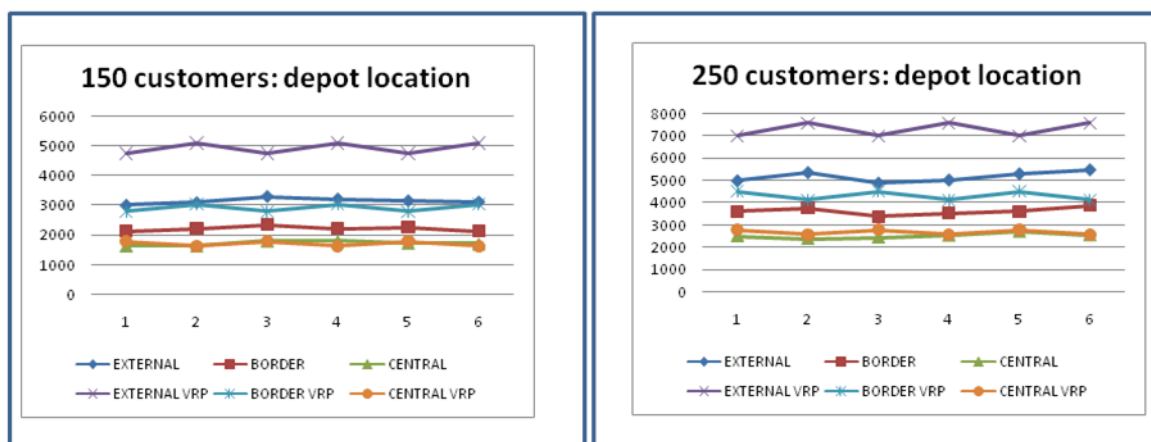Figure 9 Comparison of different numbers of satellite and standard VRP

Figure 10 Comparison of different depot-location schemes and standard VRP

6. Conclusions

This paper presents the first studies on the relationships between customer distribution, system layout, and the associated distribution costs for two-echelon distribution systems. We defined aggregated measures to better characterize such problem instances and studied these relationships on a large set of instances. A study of the solution behaviour when the number of satellites is increased was also performed.

Computational results show that opening satellites reduces the global cost until a minimum cost is reached. After that minimum, adding new satellites will increase the global cost. The minimum is obtained with a number of customers/number of satellites ratio varying in the range (20, 25). The 2E-VRP approach obtains better performances with respect to the classical VRP in most cases, in particular when the depot is located externally with respect to the customer area and the satellites are located "between" the two. This emphasizes the potential benefit of two-echelon City Logistic systems for large urban areas where distributions centres are far from the controlled zone.

This work was exploratory in nature and opens up interesting research directions. A richer set of costs should be studied, including, for example, different transportation costs for the first and the second levels, and satellite opening

and managing costs. Extensions to multi-depot and time-dependent problem settings appear both challenging and timely. Similarly, introducing the 2E-VRP methodology into a location-routing framework would pave the way for a comprehensive set of tools to plan efficient City Logistics systems.

Acknowledgments

References

Benjelloun, A., & Crainic, T. G. (2008). Trends, challenges and perspectives in City Logistics. In *Transportation and land use interaction, proceedings TRANSLU'08* (pp. 269-284). Editura Politecnica Press, Bucharest, Romania.

Crainic, T. G., Mancini, S., Perboli, G., & Tadei, R. (2008). *Heuristics for the two-echelon capacitated vehicle routing problem.* Publication CIRRELT-2008-46, CIRRELT, Université de Montréal, Canada.

Crainic, T. G., Ricciardi, N., & Storchi, G. (2004). Advanced freight transportation systems for congested urban areas. *Transportation Research Part C, Emerging Technologies,* 12, 119-137.

Crainic, T. G., Ricciardi, N., & Storchi, G. (2009). Models for evaluating and planning City Logistics systems. *Transportation Science*, available online at Articles in Advance doi 10.1287/trsc.1090.0279

Gonzalez Feliu, J., Perboli, G., Tadei, R., & Vigo, D. (2008). *The two-echelon capacitated vehicle routing problem*. Technical Report OR/02/08, Politecnico di Torino.

Hansen, W. G. (1959). How accessibility shapes land use. *Journal of the American Institute Planners,* 25, 73-76.

ILOG (2005). *ILOG Dispatcher 4.1 User's manual,* ILOG.

Perboli, G., Tadei, R., & Vigo, D. (2008). *The two-echelon capacitated vehicle routing problem*. Publication CIRRELT-2008-55, CIRRELT, Université de Montréal, Canada.

Ralphs, T. K., Kopman, L., Pulleyblank, W. R. & Trotter, L. E. (2003). On the capacitated Vehicle Routing Problem. *Mathematical Programming,* 94, 343-359.