



NOVELLATM
CORPORATION
The best you can get

DISTRIBUTOR OF CHEMICALS IN INDIA



Starting with a small operation, the company has grown to establish sales & distribution arrangements countrywide. The growth of the company was well planned and judiciously managed. The group is also involved in International Trade and has substantial dealings with several organizations.

The Novella Group has been in the business of Marketing and Distributing Speciality Chemicals in the Indian Ceramic Industry. The group has created a reputation of excellence in customer service, competitive pricing and aggressive business growth. The Novella Group has rich experience in sourcing and supplying quality products. The group is committed to providing its customers what they need, where they need and when they need

NOVELLA GROUP

OUR MOTTO

- ✓ To deliver finely sourced and categorized products in verified packaging.
- ✓ To maintain a fair price bracket in the entire supply chain.
- ✓ To satisfy customer requirements for products in different packs.
- ✓ To maintain products like Liquid Caustic Soda, Zinc Oxide, etc, safely at all times in the premises.

OUR VENDORS

Our business is not simply working for our own gain. We take responsibility of improving our vendors businesses with same determination like ours. Hence, our company thwarts unbiased and immoral activities during sourcing process. We deal in the most legal manner with all vendors and therefore provide them assurance of giving good business. Our company focuses on updating vendors beforehand for any procurement in order to provide sufficient time for order completion. We work passionately for obtaining industrial gains for not only our business but vendors as well. Our company respects corporate regulations of each vendor

ABOUT US

Novella Corporation keeps a wide array of products that are directly or indirectly finding multipurpose use in many applications such as textiles, laundry, paper, chemical, healthcare, construction, etc. Our company as observed its products finding usage in more than one application, thereby ensures about maintaining all of them in great amount of quantity, which assists to complete demands in a timely schedule. Having a sharp business structure, we are following our passion to reign market. Also, we are maintaining core competency for keeping our competitors much lower from our position. We are extremely determined to rise in the industry and for the same, huge quality focus is implemented in everyplace.

We make sure our vendor partnerships are legitimate in the industry. Our trader based company strikes relations with vendors in a lawful manner. We assure about making contracts in the most legal manner for sourcing products such as Zinc Oxide, Magnesium Carbonate, Liquid Caustic Soda, etc. Our firm always keep its team actively indulged in procurement for annihilating all sorts of errors. Our team members abides by company norms for evaluating products. Moreover, they help us with their product management skills after sourcing process. It is our ability to follow our routine operations in the most systematic manner that keeps us in a position to meet anticipated and unanticipated market demands in a prompt manner.

PRODUCT LIST

- | | |
|---|--|
| 01 SODA ASH LIGHT
(SODIUM CARBONATE) | 21 PHOSHPHARIC ACID |
| 02 SODA ASH DENSE
(SODIUM CARBONATE) | 22 HYDROCHLORIC ACID - HCL |
| 03 SODIUM TRY POLYPHOSHPHATE
(STPP) | 23 CARBOXY METHYL CELLULOSE
(C.M.C) |
| 04 SODIUM LIGNO SULPHONATE
(SLS) | 24 WALLSTONITE |
| 05 CAUSTIC SODA FLAKES
(SODIUM HYDROXIDE) | 25 SODIUM META SILICATE |
| 06 CAUSTIC SODA LYE
(SODIUM HYDROXIDE) | 26 ZINC OXIDE |
| 07 BORAX PENTAHYDRATE | 27 BENTONITE |
| 08 BORIC ACID
(POWDER & GRANULAR) | 28 CHINA CLAY |
| 09 BORAX DECAHYDRATE
(GRANULAR & CRYSTAL) | 29 BARIUM CARBONATE |
| 10 MELAMINE | 30 TALC POWDER |
| 11 ACRYLAMIDE | 31 STPP LIQIUD |
| 12 ACRYLIC ACID | 32 CERAMIC BODY BINDER |
| 13 SODIUM HYPOCHLORITE
(HYPO) | 33 DOLOMITE |
| 14 DI ETHYLEN GLYCOL
(DEG) | 34 SULPHURIC ACID |
| 15 MONO ETHYLENE GLYCOLE
(MEG) | 35 CITRIC ACID ANHYDROUS |
| 16 POLY ALUMINUM CHLORIDE
(PAC) | 36 CITRIC ACID MONOHYDRATE |
| 17 BLEACHING POWDER
(CALSIUM HYPOCHLORITE) | 37 SODIUM NITRATE (NANO3) |
| 18 SODIUM BI CARBONATE | 38 SODIUM NITRITE (NANO2) |
| 19 SODIUM SILICATE GLASS/LIQUID | 39 HYDROGEN PEROXIDE |
| 20 ACETIC ACID | 40 SODIUM SULPHATE |

SODA ASH LIGHT

CHEMICAL NAME : SODIUM CARBONATE

FORMULA : Na_2CO_3

HSN COAD : 28362020

CAS NO : 497-19-8


MAKE : NIRMA LIMITED

ORIGIN : INDIA



USAGES

Soda ash is the trade name for sodium carbonate. It is a white anhydrous powder that is available in powdered or granular material. It is essentially used in the manufacturing of glass, detergents and other industrial products. It is one of the most widely used commodities. Soda ash is also used to control pH in water treatments, neutralising acidity and eliminating problems of corrosion.

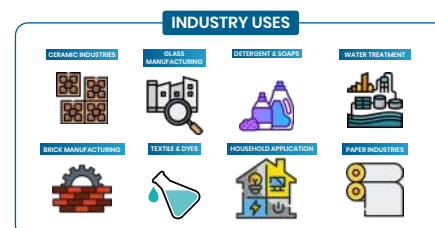

CERTIFICATE OF ANALYSIS

STANDARD PACKING : 50KG / 1000KG

CHARACTERISTICS	UOM	SPECIFICATION
Description	-	White Uniform & FREE From ForeignMatter
Total alkalinity as Na_2CO_3	%	99.00 min
Chloride as NaCl	%	0.800 max
Matter insoluble in water	%	0.0100 max
Sulphate as Na_2SO_3	%	0.0100 max
Iron as Fe_2O_3	%	0.0020 max
Bulk Density	g/l	600-700
Moisture	%	1.00 max
25% Solution	-	Clear

SODA ASH DENSE

CHEMICAL NAME : SODIUM CARBONATE

FORMULA : Na_2CO_3

HSN COAD : 28362010

CAS NO : 497-19-8


MAKE : NIRMA LIMITED

ORIGIN : INDIA



USAGES

Soda ash dense, Sodium Carbonate also known as disodium carbonate is a chemical substance white in colour and its aqueous solution is clear and color-less. Making soaps and detergents, where it is employed as a builder, or filler, to give a smoother surface, Production of chemicals such as sodium silicate, sodium bicarbonate and percarbonate, and sodium chromate and dichromate, Pulp and paper manufacture, water treatment, effluent treatment, metallurgy and drugs.

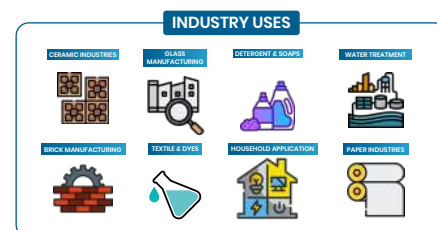

CERTIFICATE OF ANALYSIS

STANDARD PACKING : 50KG / 1200KG

CHARACTERISTICS	UOM	SPECIFICATION
Description	–	White Uniform & FREE From Foreign Matter
Total alkalinity as Na_2CO_3	%	99.20 min
Chloride as NaCl	%	0.500 max
Matter insoluble in water	%	0.0100 max
Sulphate as Na_2SO_3	%	0.0100 max
Iron as Fe_2O_3	%	0.0020 max
Bulk Density	g/l	975-1100
Moisture	%	0.80 max
25% Solution	–	Clear
+1.40 mm	%	2.00 Max
–0.150 mm	%	2.50 Max


SODIUM TRI POLYPHOSPHATE (STPP)

CHEMICAL NAME : PENTASODIUM TRIPOLYPHOSPHATE
ANHYDROUS
FORMULA : $\text{Na}_5\text{P}_3\text{O}_{10}$
HSN COAD : 28353100
CAS NO : 7758-29-4
MAKE : METACHEM CHEMICAL
ORIGIN : RUSSIA



USAGES

Stpp (sodium tripolyphosphate) is widely used detergent industries from many years. Sodium triphosphate is an inorganic compound with formula $\text{Na}_5\text{P}_3\text{O}_{10}$. Sodium Tripolyphosphate is characteristically used as deflocculants in the mining and processing of clay minerals and then again as dispersants in preparing slurries for whiteware, glaze, and enamel manufacture.

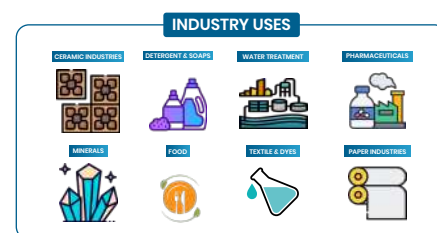

CERTIFICATE OF ANALYSIS

STANDARD PACKING : 50KG

PARAMETERS	LIMITS	RESULTS	ANALITICAL METHOD
Colour & Appearance	Free flowing, non-lumpy, fine smooth white, powder free from visible impurities & grits		
P2O5 Content %	55.5 minimum - 56.0 maximum	56.0	ISO 3357
ROH 1 minute the mean value of any suppliers individual deliveries	81°C minimum - 93°C maximum	84.5	
ROH 5 minute the mean value of any suppliers individual deliveries	84°C minimum - 95°C maximum	86.5	
TRT	13 - 17°C	14.5	
Bulk Density.gm/cm ³	0.9 minimum - 1.1 maximum	1.1	
Whiteness Level (Hunter Color Meter(L)),%	95 minimum	98	
Sodium Tripolyphosphate ($\text{Na}_5\text{P}_3\text{O}_{10}$) Content (expressed as a % total phosphate Content)%	94 minimum	94	ISO 3000
Phase (Form) 1	25 minimum - 40 maximum	31	UMA 5681
Partical Size Distribution (50g sample,20 minute)	-	-	
On 425 micron(Tyler 35 mesh or equivalent) %	5.0 maximum	2.0	
On 150 micron(Tyler 100 mesh or equivalent) %	75 minimum	82	
Iron as Fe %	0.01 maximum	0.01	
pH(1.0% in distilled water @25°C)%	9.2 minimum - 10.0 maximum	9.8	
Water insoluble %	0.10 maximum	0.10	

SODIUM TRI POLYPHOSPHATE (STPP)

CHEMICAL NAME : PENTASODIUM TRIPOLYPHOSPHATE
ANHYDROUS
FORMULA : $\text{Na}_5\text{P}_3\text{O}_{10}$
HSN COAD : 28353100
CAS NO : 7758-29-4
MAKE : HUBEI XINGFA CHEMICALS
GROUP CO.LTD.
ORIGIN : CHINA



USAGES

Stpp (sodium tripolyphosphate) is widely used detergent industries from many years. Sodium triphosphate is an inorganic compound with formula $\text{Na}_5\text{P}_3\text{O}_{10}$. Sodium Tripolyphosphate is characteristically used as deflocculants in the mining and processing of clay minerals and then again as dispersants in preparing slurries for whiteware, glaze, and enamel manufacture.

INDUSTRY USES



CERTIFICATE OF ANALYSIS

STANDARD PACKING : 25 Kgs

ITEM		STANDARDS	RESULTS
P205		$\geq 55.5\%$	57.2
STPP		$\geq 90.0\%$	96.0
Phase I		$\geq 16 \leq 32\%$	18
Insoluble in water		$\leq 0.10 \%$	0.04
Bulk density		$\geq 700 \leq 1100 \text{ kg/m}^3$	820
PH % solution		$\geq 9.4 \leq 10.2$	9.6
White Degree (Wg. Gans White)		$\geq 90.0\%$	90.0
Water Content		$\leq 0.8 \%$	0.1
Temperature rise		$\geq 10.0 \leq 14.0 \text{ }^\circ\text{C}$	11
PARTICLE SIZE	> 1000 microns	$\leq 0.2\%$	0.1
	> 500 microns	$\leq 0.3 \%$	0.1
	> 150 microns	$\leq 15.0 \%$	11.0
	< 60 microns	$\leq 50.0 \%$	47.0
	Mean Particle size (Microns)	-	-
	Fe	$\leq 250 \text{ ppm}$	83
	Cr	$\leq 5\text{ppm}$	5
	Co	$\leq 5\text{ppm}$	0.49
	Ni	$\leq 5\text{ppm}$	5

SODIUM LIGNO SULPHONATE (SLs)

CHEMICAL NAME : LIGNOSULFONIC ACID , SODIUM SALT
FORMULA : C₂₀H₂₄NA₂O₁₀S₂
HSN COAD : 38040010
CAS NO : 8061-51-6
MAKE : VYBORG, CHINA
ORIGIN : RUSSIA, CHINA



USAGES

Sodium lignosulfonate (lignosulfonic acid, sodium salt) is used in the food industry as a de-foaming agent for paper production and in adhesives for items that come in contact with food. It has preservative properties, and is used as an ingre-dient in animal feeds. It is also used for construction, ceramics, mineral powder, chemical industry, textile industry (leather), metallurgical industry, petroleum industry, fire-retardant materials, rubber vulcanization, organic polymerization.



CERTIFICATE OF ANALYSIS

STANDARD PACKING : 25kg | 570 KG JUMBO BAG

APPEARANCE	POWDER
Color	FROM LIGHT BROWN TO DARK BROWN
MASS FRACTION OF DRY SUBSTANCE, %	96.2
MASS FRACTION OF BASIC SUBSTANCE, %	70.6
pH	5.3
ASH CONTENT, RELATING TO MESS OF DRY SUBSTANCE %	19.1
MASS FRACTION OF REDUCING SUBSTANCES %	7.5


CAUSTIC SODA FLAKES

CHEMICAL NAME : SODIUM HYDROXIDE
FORMULA : NaOH
HSN COAD : 28151110
CAS NO : 1310-73-2
MAKE : NIRMA LIMITED, GRASIM INDUSTRIES
KUTCH CHEMICAL
ORIGIN : INDIA



USAGES

Caustic soda flakes is majorly used in textiles processing, soap and detergent, paper and pulp industry. It is also used as an intermediate for wide variety of organic chemicals such as dyes, pigments, agrochemicals and variety of inorganic chemicals such as sulphites, phosphites etc.

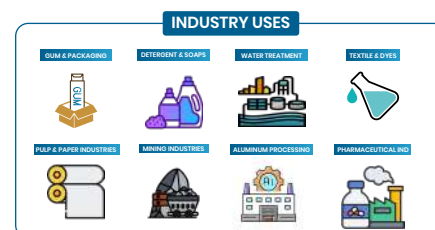

CERTIFICATE OF ANALYSIS

STANDARD PACKING : 50kg

CHARACTERISTICS	UOM	SPECIFICATIONS
Description	—	White Uniform & Free From Foreign Matter
Sodium Carbonate Na_2CO_3	%	0.40 Max
Sodium hydroxide Na_2CO_3	%	97.00 Min
Chlorides as Cl	%	0.030 Max
Sulphate as SO_4	%	0.030 Max
Silicates as SiO_2	%	0.020 Max
Iron as Fe	PMM	20.00 Max
Copper as Cu	PMM	2.00 Max
Manganese as Mn	PMM	1.00 Max
Chlorates & Perchlorates as NaClO_3	PMM	10.00 Max
Matter insoluble in water	%	0.05 Max
Mercury	PMM	0.020 Max
Sodium Hydroxide as NaOH (on dry basis)	%	99.50 Min



CAUSTIC SODA LYE

CHEMICAL NAME : SODIUM HYDROXIDE

FORMULA : NaOH

HSN COAD : 28151200

CAS NO : 1310-73-2

MAKE : NIRMA LIMITED , KUTCH CHEMICAL ,
ADITYA BIRLA (GRASIM) , EPIGRAL


ORIGIN : INDIA



CERTIFICATE OF ANALYSIS

USAGES

Caustic Soda Lye, also known as Sodium Hydroxide (NaOH), is a powerful and versatile chemical widely used in various industries. Its strong alkaline nature makes it an essential ingredient in numerous applications, including the production of soaps, detergents, and cleaning agents. In the paper and pulp industry, it plays a vital role in pulping and bleaching processes, while in the textile sector

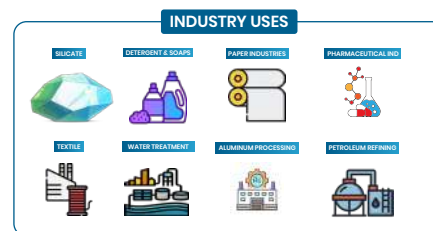

STANDARD PACKING : LIQUID TANKER

CHARACTERISTICS	UOM	SPECIFICATION
Description	—	Free From Foreign Matter
Relative Density at 40°C	—	1.485 Min
Sodium Carbonate as Na_2CO_3	%	0.20 Max
Sodium Hydroxide as NaOH	%	47.00 Min
Chloride as Cl	%	0.015 Max
Sulphate as SO_4	%	0.015 Max
Silicates as SiO_2	%	0.010 Max
Iron as Fe	ppm	10.00 Max
Copper as Cu	ppm	1.00 Max
Manganese as Mn	ppm	0.50 Max
Chlorates & Perchlorates as NaClO_3	ppm	40.00 Max
Matter insoluble in water	%	0.025 MAX
Mercury	ppm	0.010 Max
Sodium Hydroxide as NaOH (on dry basis)	%	0.025 Max

BORAX PENTAHYDRATE (V-BOR)

CHEMICAL NAME : SODIUM TETRABORATE PENTAHYDRATE

FORMULA : $\text{Na}_2\text{B}_4\text{O}_7 \cdot 5\text{H}_2\text{O}$

HSN COAD : 28401900

CAS NO : 12179-04-3

MAKE : V-BOR (THREE ELEPHANT)


ORIGIN : USA



USAGES

Borax is a salt (ionic compound), a hydrated borate of sodium. It is commonly available in powder or granular form and has many industrial and household uses, including as a pesticide, as a metal soldering flux, as a component of glass, enamel, and pottery glazes, for tanning of skins and hides, for artificial aging of wood, as a preservative against wood fungus, and as a pharmaceutical alkaliizer. In chemical laboratories, it is used as a buffering agent.

INDUSTRY USES

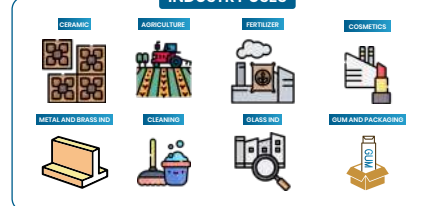

CERTIFICATE OF ANALYSIS

STANDARD PACKING : 25 KG / 1000 KG

PARTICULARS

VALUE

Na ₂ B ₄ O ₇ ·5H ₂ O	102.2%
Na ₂ B ₄ O ₇	70.6%
B ₂ O ₃	48.9%
Na ₂ O	21.8%
Cl	260 ppm
Na ₂ SO ₄	214 ppm
H ₂ O (BY DIFF.)	29.4%
Fe	2 ppm
+12	0%

BORIC ACID


CHEMICAL NAME : ORTHO BORIC ACID
FORMULA : H₃BO₃
HSN COAD : 28100020
CAS NO : 10043-35-3
MAKE : ORGANIC INDUSTRIES PVT. LTD.
ORIGIN : INDIA
GRADE : GRANULAR AND POWDER
GRADE



CERTIFICATE OF ANALYSIS

USAGES

Boric Acid Granular (H₃BO₃) is a highly versatile compound widely used across various industries for its unique chemical and physical properties. In the glass and ceramics industry, it enhances thermal resistance and strengthens the durability of products such as fiberglass, borosilicate glass, and ceramic items. In agriculture, it serves as an essential micronutrient in fertilizers, addressing boron deficiencies and promoting healthy plant development.

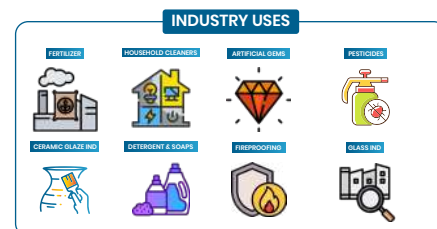

STANDARD PACKING : 50KG

TEST PARAMETER	UOM	RESULT
Description	White crystalline TO amorphous solid (GRANULES) free from dirt, foreign matter and visible impurities	COMPLIES
Boric Acid percentage by mass	99.50% MIN	99.67
Moisture percentage by mass	0.2% MAX	0.08
Chloride as (Cl), percent by mass, max	0.05% - 0.15%	COMPLIES
Sulphate (as SO ₄), percent by mass	0.15% - 0.25%	COMPLIES
Bulk density	800-900kg/m ³	829
Particle Size, Retention On 100 BSS mesh	90%MIN	93.58

MELAMINE

CHEMICAL NAME : CYANURAMIDE OR TRIAMINOTRIAZINE

FORMULA : $C_3H_6N_6$

HSN COAD : 29336100

CAS NO : 108-78-1

MAKE : SHUNTIAN


ORIGIN : CHINA



CERTIFICATE OF ANALYSIS

USAGES

Melamine is combined with formaldehyde and other agents to produce melamine resins. Such resins are characteristically durable thermosetting plastic used in high-pressure decorative laminates such as Formica, melamine dinnerware, laminate flooring, and dry erase boards. Melamine foam is used as insulation, soundproofing material and in polymeric cleaning products, such as Magic Eraser.

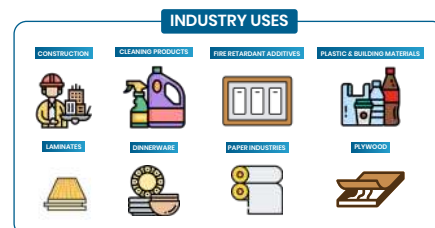

STANDARD PACKING : 25 Kg

CHARACTERISTICS	UNIT	STANDARDS
Purity	%	99.5
Moisture	%	0.1
PH Value	/	7.5-9.5
Ash Content	%	0.03
Turbidity	Degree	20
Pt/Co Scale Hazen	Hazen	20
Appearance	White Powder Without Foreign Substance	

ACRYLAMIDE


CHEMICAL NAME : 2-PROPENAMIDE, ACRYLIC AMIDE
FORMULA : C₃H₅NO
HSN COAD : 29241900
CAS NO : 79-06-1
MAKE : ZIBO (MX CHEM)
ORIGIN : CHINA



CERTIFICATE OF ANALYSIS

USAGES

The majority of acrylamide is used to manufacture various polymers, especially polyacrylamide. This water-soluble polymer, which has very low toxicity, is widely used as thickener and flocculating agent. These functions are valuable in the purification of drinking water, corrosion inhibition, mineral extraction, and paper making. Polyacrylamide gels are routinely used in medicine and biochemistry for purification and assays.

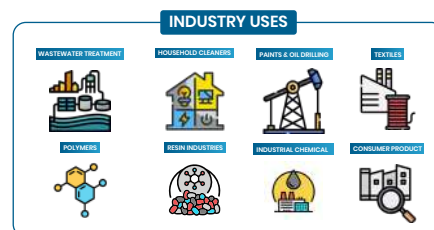

STANDARD PACKING : 25 Kg

ITEMS	STANDARDS
Appearance	White Crystal
Content (%)	≥ 98
Moisture (%)	≤ 1
Fe (PPM)	0
Cu (PPM)	0
Color (hazen) 40% solution	≤ 10
Inhibitor (ppm)	≤ 10
Water insoluble	≤ 0.005%
Conductivity (us/cm)	≤ 5
Ph (ph meter) 40% solution	7 - 8

ACRYLIC ACID

CHEMICAL NAME : PROPENOIC ACID

FORMULA : C₃H₄O₂

HSN NO : 29161100

CAS NO : 79-10-7

MAKE : LG CHEM


ORIGIN : KOREA



CERTIFICATE OF ANALYSIS

USAGES

The majority of acrylamide is used to manufacture various polymers, especially polyacrylamide. This water-soluble polymer, which has very low toxicity, is widely used as thickener and flocculating agent. These functions are valuable in the purification of drinking water, corrosion inhibition, mineral extraction, and paper making. Polyacrylamide gels are routinely used in medicine and biochemistry for purification and assays.

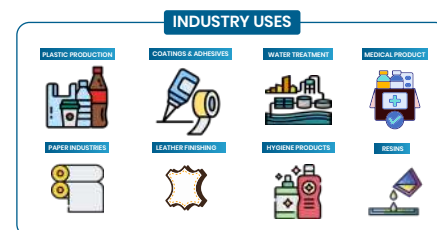

STANDARD PACKING : 200KG BARREL

PROPERTY	TEST METHOD	UNIT	SPEC	RESULT
Purity	GAS CHRO	wt.%	Min 99.50	99.86
Color	ASTM D 1209	APHA	Max 10	4
Water	ASTM D 1364	wt.%	Max 0.050	0.019
Inhibitor(MEHQ)	ASTM D 3125	wt.ppm	180 - 220	200
ACR(Acrolein)	GAS CHRO	wt.ppm	Max 1.00	0.47
FF(Furfural)	UV SPECTRO	wt.ppm	Max 1.00	0.77
SP.GR(20/4°C)	ASTM D 1298	—	1.046-1.056	1.051



DI ETHYLENE GLYCOL (DEG)

CHEMICAL NAME : 2,2-OXYDIETHANOL AND DIGLYCOL

FORMULA : $C_4H_{10}O_3$

HSN COAD : 29094100

CAS NO : 111-46-6

MAKE : RELIANCE INDUSTRIES

ORIGIN : INDIA




CERTIFICATE OF ANALYSIS

USAGES

Diethylene Glycol (DEG) is a versatile chemical widely used across various industries due to its excellent solvent properties, high boiling point, and hygroscopic nature. It serves as a key ingredient in the production of antifreeze, coolants, and brake fluids, as well as a dehydrating agent in natural gas processing.

INDUSTRY USES

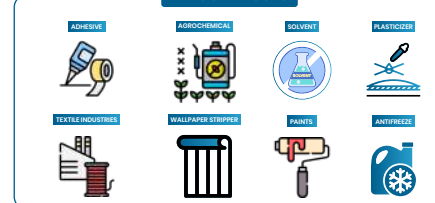

STANDARD PACKING : 230 KG BARREL

PARAMETERS	UOM	SPECIFICATIONS
Appearance	–	Clear, Colourless/Liquid
Suspended Matter	–	Nil
Water	wt%	0.100 Max
Diethylene glycol	wt%	99.500 Min
MEG+TEG	wt%	0.500 Max
Specific gravity at 20/20°C	–	1.1170 – 1.1200
Distillation Range – 5% Vol	°C	242.0 Min
Distillation Range – 5% Vol	°C	250.0 Max
Acidity as Acetic acid (CH ₃ COOH)	Mg/kg	30.0 Max



POLY ALUMINIUM CHLORIDE (PAC)

CHEMICAL NAME : POLYALUMINIUM HYDROXIDE CHLORIDE
SULPHATE SOLUTION
FORMULA : $[Al_2(OH)_6Cl_6 \cdot nH_2O]$
HSN COAD : 28273200
CAS NO : 1327-41-9
MAKE : GACL, ADITYA BIRLA
ORIGIN : INDIA



CERTIFICATE OF ANALYSIS

USAGES

Poly Aluminium Chloride (PAC) is a versatile coagulant widely used in water treatment and various industrial applications. In water purification, it is highly effective for clarifying drinking water, treating municipal and industrial wastewater, and removing turbidity, organic matter, and suspended solids. Its efficiency extends to industries such as paper manufacturing, where it improves water recycling and paper quality, and the textile sector, where it enhances dye fixation and treats effluents.

INDUSTRY USES

WATER TREATMENT



PAPER & PULP INDUSTRIES



OIL & GAS



TEXTILE INDUSTRIES



STANDARD PACKING : 25 Kg

VIKRAM

PARAMETER

UNIT

SPECIFICATION

Purity as AL2O3	%	Min 28.00
Basicity	%	Min 35.00
Chloride as Cl	%	Max 36.00
Sulphate as SO4	%	Max 10.00
Bulk Density	g/ml	Min 0.65
Mercury as Hg	PPM	Min 0.60
Arsenic as As	PPM	Max 15.00
Cadmium as Cd	PPM	Max 6.00
Lead as Pb	PPM	Max 24.00
Iron as Fe	PPM	Max 240.00
Chromium as Cr	PPM	Max 45.00
Water Insoluble	%	Max 1.50
PH of 5% Solution (w/v)	-	2.50 - 4.50
Total Organic Carbon (TOC)	PPM	Max 240.00
Selenium as Se	PPM	Max 24.00
Manganese as Mn	PPM	Max 60.00
Certified to NSF /ASNI 60	-	Certified to NSF /ASNI 60

GACL

CHARACTERISTICS	UNIT	SPECIFICATION
Bulk Density	g/ml	0.65 Min
Purity as AL2O3	%	28.0 Min
Chloride as Cl	%	37.5 Max
Bulk Density	%	35.0 Min
Sulphate as SO4	%	10.00 Max
PH of 5% Solution	%	2.5-4.5

BLEACHING POWDER


CHEMICAL NAME : CALCIUM HYPOCHLORITE
FORMULA : CaClO_2
HSN COAD : 28289019
CAS NO : 7778-54-3
MAKE : GACL, ADITYA BIRLA (VIKRAM)
ORIGIN : INDIA



CERTIFICATE OF ANALYSIS

USAGES

Bleaching powder, or calcium hypochlorite, is a powerful chemical widely used in various applications due to its disinfecting, bleaching, and oxidizing properties. It plays a crucial role in water treatment, where it is used to disinfect drinking water, eliminate harmful microorganisms, and purify swimming pools. In industrial settings, bleaching powder is utilized for surface disinfection in food processing, healthcare, and pharmaceutical industries.



GACL

STANDARD PACKING : 25 Kg

ITEMS	UNITS	SPECIFICATIONS
Available Chlorine	%	34.0 Min
Stability	—	1/15 Max
Moisture H_2O	%	0.30 Max
Partical Siza In %	%	99.5 Min

ADITYA BIRLA

CHARACTERISTICS	UNITS	SPECIFICATIONS
Appearance	—	White Fine Free Flow
Available Chlorine	%	34.00 Min
Stability By Parts	—	Min 1/5
Moisture (as Mn)	%	Max 0.30
Particle Size (pass through 1.7 mm)	%	Min 99.00
Lead (as Ph)	PPM	Max 70.00
Arsenic (as As)	PPM	Max 10.00
Manganese (as Mn)	PPM	Max 250.00
Chormium (as Cr)	PPM	Max 20.00
Mercury (as Hg)	PPM	Max 5.00
Cadmium (as Cd)	PPM	Max 10.00
Selenium (as Se)	PPM	Max 10.00

SODIUM BI CARBONATE


CHEMICAL NAME : SODIUM HYDROGENCARBONATE
FORMULA : NaHCO_3
HSN COAD : 28363000
CAS NO : 144-55-8
MAKE : NIRMA LIMITED
ORIGIN : INDIA



CERTIFICATE OF ANALYSIS

USAGES

Sodium bicarbonate, commonly known as baking soda, is a versatile compound with a wide range of applications across various fields. Medically, it is used as an antacid to relieve heartburn, indigestion, and acid reflux while also helping to balance body pH levels, especially for those with kidney disease. In household cleaning, it serves as a natural deodorizer, stain remover, and scouring agent, effectively cleaning surfaces and unclogging drains when combined with vinegar.



FOOD GRADE

STANDARD PACKING : 50 Kg

CHARACTERISTICS	UOM	SPECIFICATION
Description	-	White Uniform & Free From Foreign Matter
Whiteness	%	95.0 min
Bulk Density	Kg/m ³	900 - 1200
Moisture (Loss On Drying)	%	0.20 Max
Water Insoluble Matter	%	0.050 Max
Total Alkalinity as NaHCO_2	%	99.80 Min
Na Content	%	27.30 min
Chlorides (as Cl)	%	0.0200 min
Sulfate (as SO_4)	%	0.015 max
Iron (as Fe)	%	0.0015 max
Arsenic (as As)	ppm	1.00 max
Copper (as Cu)	ppm	1.00 max
Heavy metals (as Pb)	ppm	1.00 max
Mercury	ppm	1.00 max
pH (1% Aqueous Solution)	-	7.90 - 8.60
Ammonia	ppm	1.00 max
+0.500 mm	%	0.50 - 1.50
0.500 mm + 0.250 mm	%	5.00 - 15.00
-0.250 mm + 0.150 mm	%	15.00 - 25.00
-0.150 mm + 0.106 mm	%	15.00 - 30.00
-0.106 mm + 0.075 mm	%	15.00 - 30.00
-0.075 mm	%	15.00 - 30.00



SODIUM SILICATE LIQUID / GLASS

CHEMICAL NAME : WATERGLASS, WATER GLASS, OR LIQUID GLASS

FORMULA : Na_2SiO_3

HSN COAD : 28391900

CAS NO : 1344-09-8

MAKE : LOCAL


ORIGIN : INDIA



CERTIFICATE OF ANALYSIS

USAGES

Sodium silicate, also known as liquid glass, is a versatile compound used in a variety of industries due to its strong binding, sealing, and protective properties. In water treatment, it helps soften hard water and prevents scale buildup in pipes and boilers. In construction, it is used as a binder in concrete and cement, enhancing strength and water resistance, while also serving as a key ingredient in adhesives for paper, wood, and cardboard products.



SODIUM SILICATE LIQUID

STANDARD PACKING : LOOSE

CHARACTERISTICS	ALKALINE GRADE			NEUTRAL GRADE	
	52 Baume	56 Baume	30 Baume	32 Baume	40 Baume
Type					
Na ₂ O	14.52% +/- 0.5%	15.80% +/- 0.5%	6.30% +/- 0.5%	6.76% +/- 0.5%	8.60% +/- 0.5%
SiO ₂	32.00% +/- 0.5%	34.80% +/- 0.5%	20.80% +/- 1.0%	22.35% +/- 1.0%	28.40% +/- 1.0%
Total Solid	46.52% +/- 1.0%	50.60% +/- 1.0%	27.10% +/- 1.0%	29.11% +/- 1.0%	37.0% +/- 1.0%
Ratio	1:2.20 (Wt Ratio) +/- 0.1	1:2.20 (Wt Ratio) +/- 0.1	1:3.30 (Wt Ratio) +/- 0.1	1:3.30 (Wt Ratio) +/- 0.05	1:3.30 (Wt Ratio) +/- 0.1
Baume (Degree)	52 +/- 1.0	56 4/-1.0	30 +/- 0.5	32 +/- 1.0%	40 +/- 1.0
Sp. Gravity	1.560 +/- 0.02	1,630 +/- 0.02	1.260 +/- 0.02	1.285 +/- 0.02	1.380 +/- 0.02

SODIUM SILICATE GLASS

CHEMICAL COMPOUND	ALKALINE GRADE	NEUTRAL GRADE
Appearance	Transperence low melting glass	Transperence low melting glass
PH (5 % Aqus Soin)	11 to 12 PH	11 to 12 Pm
Na ₂ O Content	31.22% +/- 0.25%	23.24% +/- 0.50%
SiO ₂ Content	68.77% +/- 0.25%	76.75% +/- 0.50%
Total Solid	99.99% +/- 0.1	99.99% +/- 0.1%
Ratio	1:2.20 (Wt Ratio) +/- 0.1 %	1:3.30 (Wt Ratio) +/- 0.1%
Iron Content	250% +/- 100ppm	200 ppm max
Unmelted Sand	1 % +/- 0.2 %	1 % +/- 0.2%

PHOSPHORIC ACID

CHEMICAL NAME : ORTHOPHOSPHORIC ACID,
MONOPHOSPHORIC ACID

FORMULA : H₃PO₄

HSN COAD : 28092010

CAS NO : 7664-38-2

MAKE : GACL, ADITYA BIRLA, NIRMA LIMITED

ORIGIN : INDIA



USAGES

Phosphoric acid (orthophosphoric acid, monophosphoric acid or phosphoric(v) acid) is a colorless, odorless phosphorus-containing solid, and inorganic compound with the chemical formula H₃PO₄. It is commonly encountered as an 85% aqueous solution, which is a colourless, odourless, and non-volatile syrupy liquid. Phosphoric acid is a component of fertilizers (80% of total use), detergents, and many household cleaning products. Dilute solutions have a pleasing acid taste; thus, its also used as a food additive, lending acidic properties to soft drinks and other prepared foods, and in water treatment products.

INDUSTRY USES



CERTIFICATE OF ANALYSIS (FOOD GRADE)

STANDARD PACKING : 50 KG CARGO

CHARACTERISTICS	UOM	SPECIFICATIONS	RESULT
Purity as H ₃ PO ₄ (w/w)	%	85.00 min	87.5
Nitrates as NO ₃	mg/kg	5.00 max	< 5.0
Volatile Acids	mg/kg	10.00 max	< 10.0
Chlorides as Cl (	mg/kg	200.00 max	25
Sulphate as SO ₄ ²⁻ (w/w)	%	0.15 max	0.008
Fluoride as F	mg/kg	10.00 max	5
Arsenic as (As)	mg/kg	2.00 max	< 2.0
Lead as Pb	mg/kg	4.00 max	< 0.2
Copper as Cu	mg/kg	30.00 max	< 0.1
Tin	mg/kg	250.0 max	< 0.1
Cadmium as Cd	mg/kg	1.50 max	< 0.1
Mercury	mg/kg	1.00 max	< 0.1
Molybdenum as Mo	mg/kg	10.00 max	< 0.1
Aluminium as Al	mg/kg	10.00 max	0.50
Calcium as Ca	mg/kg	20.00 max	9
Iron as Fe	mg/kg	3.00 max.	2
Sodium as Na	mg/kg	30.00 max	25

ACETIC ACID

CHEMICAL NAME : ETHANOIC ACID
FORMULA : CH₃COOH
HSN COAD : 29152100
CAS NO : 64-19-7
MAKE : GNFC



CERTIFICATE OF ANALYSIS

USAGES

Glacial acetic acid, a concentrated form of acetic acid, is a highly versatile compound with numerous industrial, commercial, and laboratory applications. It is widely used in the production of acetate esters, which serve as solvents in paints, coatings, and adhesives, and in the synthesis of acetic anhydride, crucial for plastics, pharmaceuticals, and synthetic fibers. In the food industry, it is diluted to make vinegar, a key preservative and flavor enhancer used in pickling and food processing.


INDUSTRY USES



STANDARD PACKING : 30 KG CARGO

TEST	UNIT	SPECS	RESULT
Solubility in water	-	Completely miscible	PASS
Relative density at 27 deg c	-	1.0496 max	1.0490
Colour hazen units	-	10 max	< 5
Acetic acid content	% w/w	99.85 min	99.90
Crystallization point deg.C	-	16.35 min	16.40
Iron as fe	PPM	1.0 max	0.12
Heavy metal as pb	PPM	2.00 max	< 1
Formic acid	% w/w	0.05 max	0.02
Aldehyde as acetaldehyde	% w/w	0.05 max	< 0.005
Oxidizable impurities	HRS	2.0 min	PASS
Water	% w/w	0.15 max	0.08
Arsenic as as	PPM	2.0 max	< 2
Chloride as cl	PPM	1.0 max	< 1
Sulphate as so4	PPM	1.0 max	< 1
Residue on evaporation	% w/w	0.005 max	< 0.005

INDUSTRY SURVEY



CERAMIC INDUSTRIES



GLASS
MANUFACTURING




PAPER MILL



DYES & TEXTILE



WATER TREATMENT



LAMINATE & PLY



AGRO & FERTILIZERS



GUM & PACKAGING IND



PHARMACEUTICALS



CONSTRUCTION



DETERGENT



FIREPROOFING

-: DISTRIBUTORSHIP :-



CONTACT US

🌐 www.novellacorporation.com
✉ Novella.corporation@gmail.com

☎ +91 98254 31018
☎ +91 99982 77711

📍 Plot no 7,B/ H iscon plaza , 8 A N highway, Nr Dariyalal hotel, Rafadeshwar chokdi, paneli road, (Morbi-2) 363642