


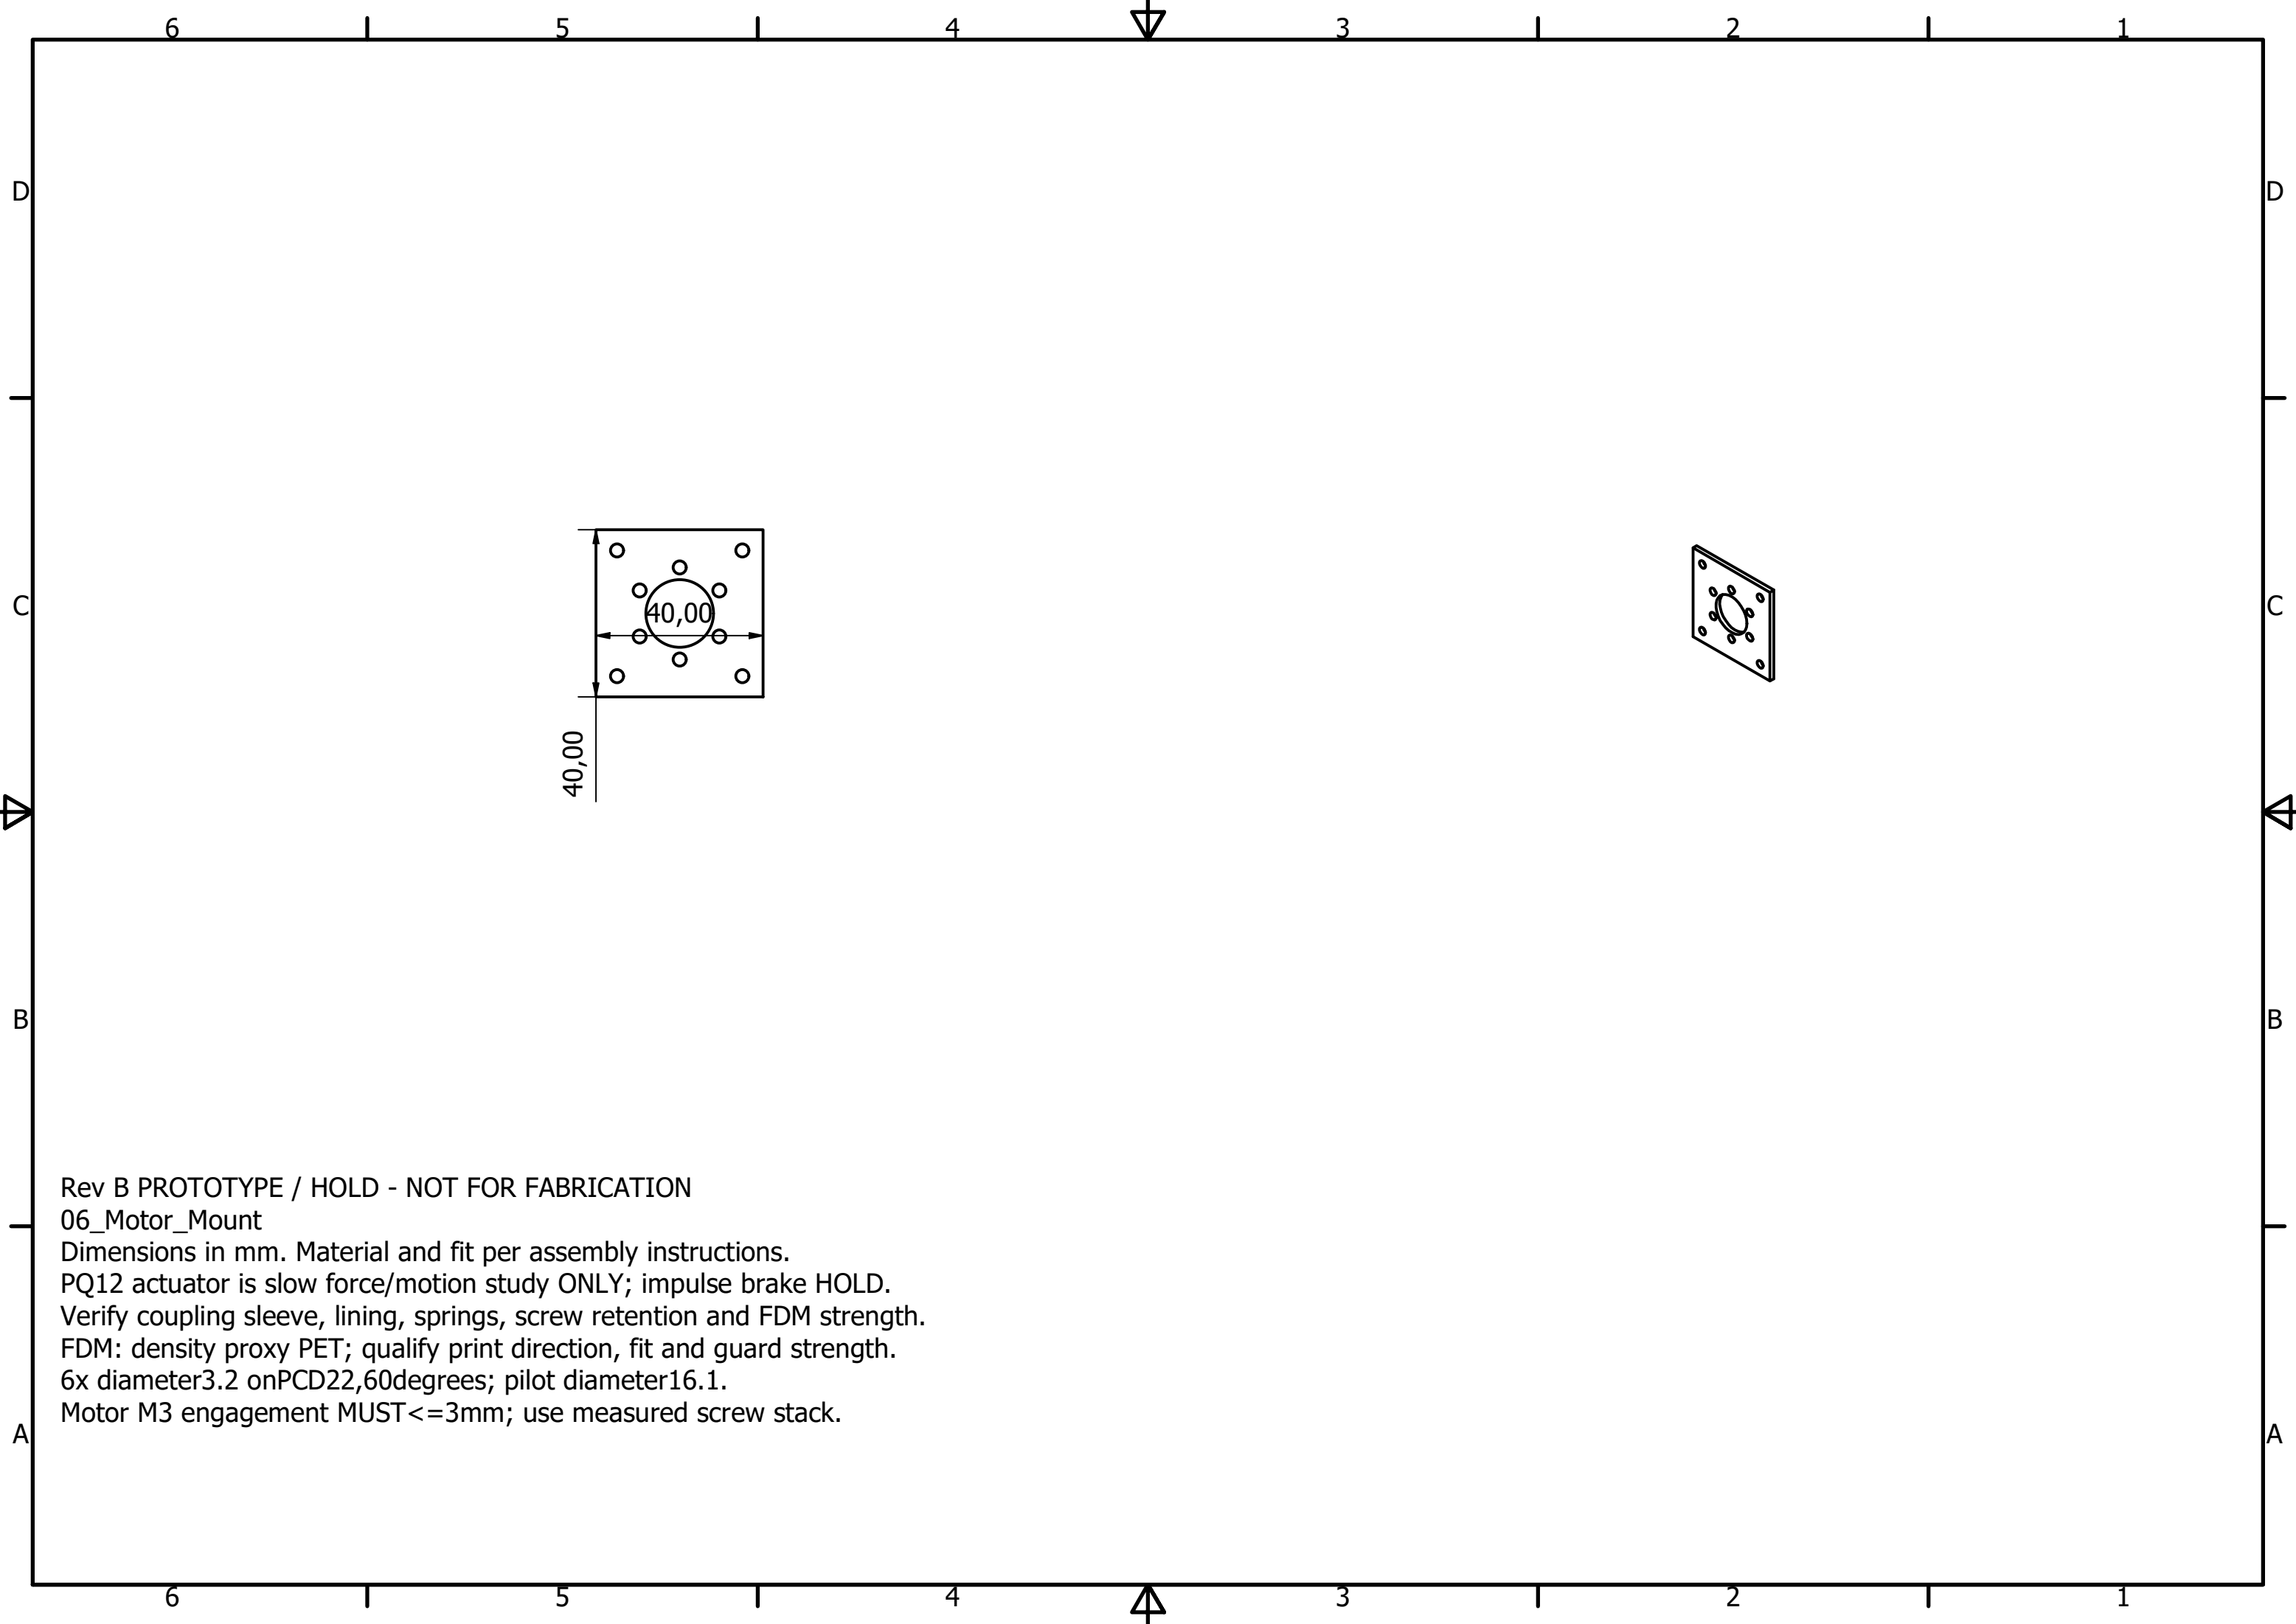

Rev B PROTOTYPE / HOLD - NOT FOR FABRICATION

06_Motor_Mount

Dimensions in mm. Material and fit per assembly instructions.

PQ12 actuator is slow force/motion study ONLY; impulse brake HOLD.

Verify coupling sleeve, lining, springs, screw retention and FDM strength.

FDM: density proxy PET; qualify print direction, fit and guard strength.

6x diameter3.2 onPCD22,60degrees; pilot diameter16.1.

Motor M3 engagement MUST<=3mm; use measured screw stack.