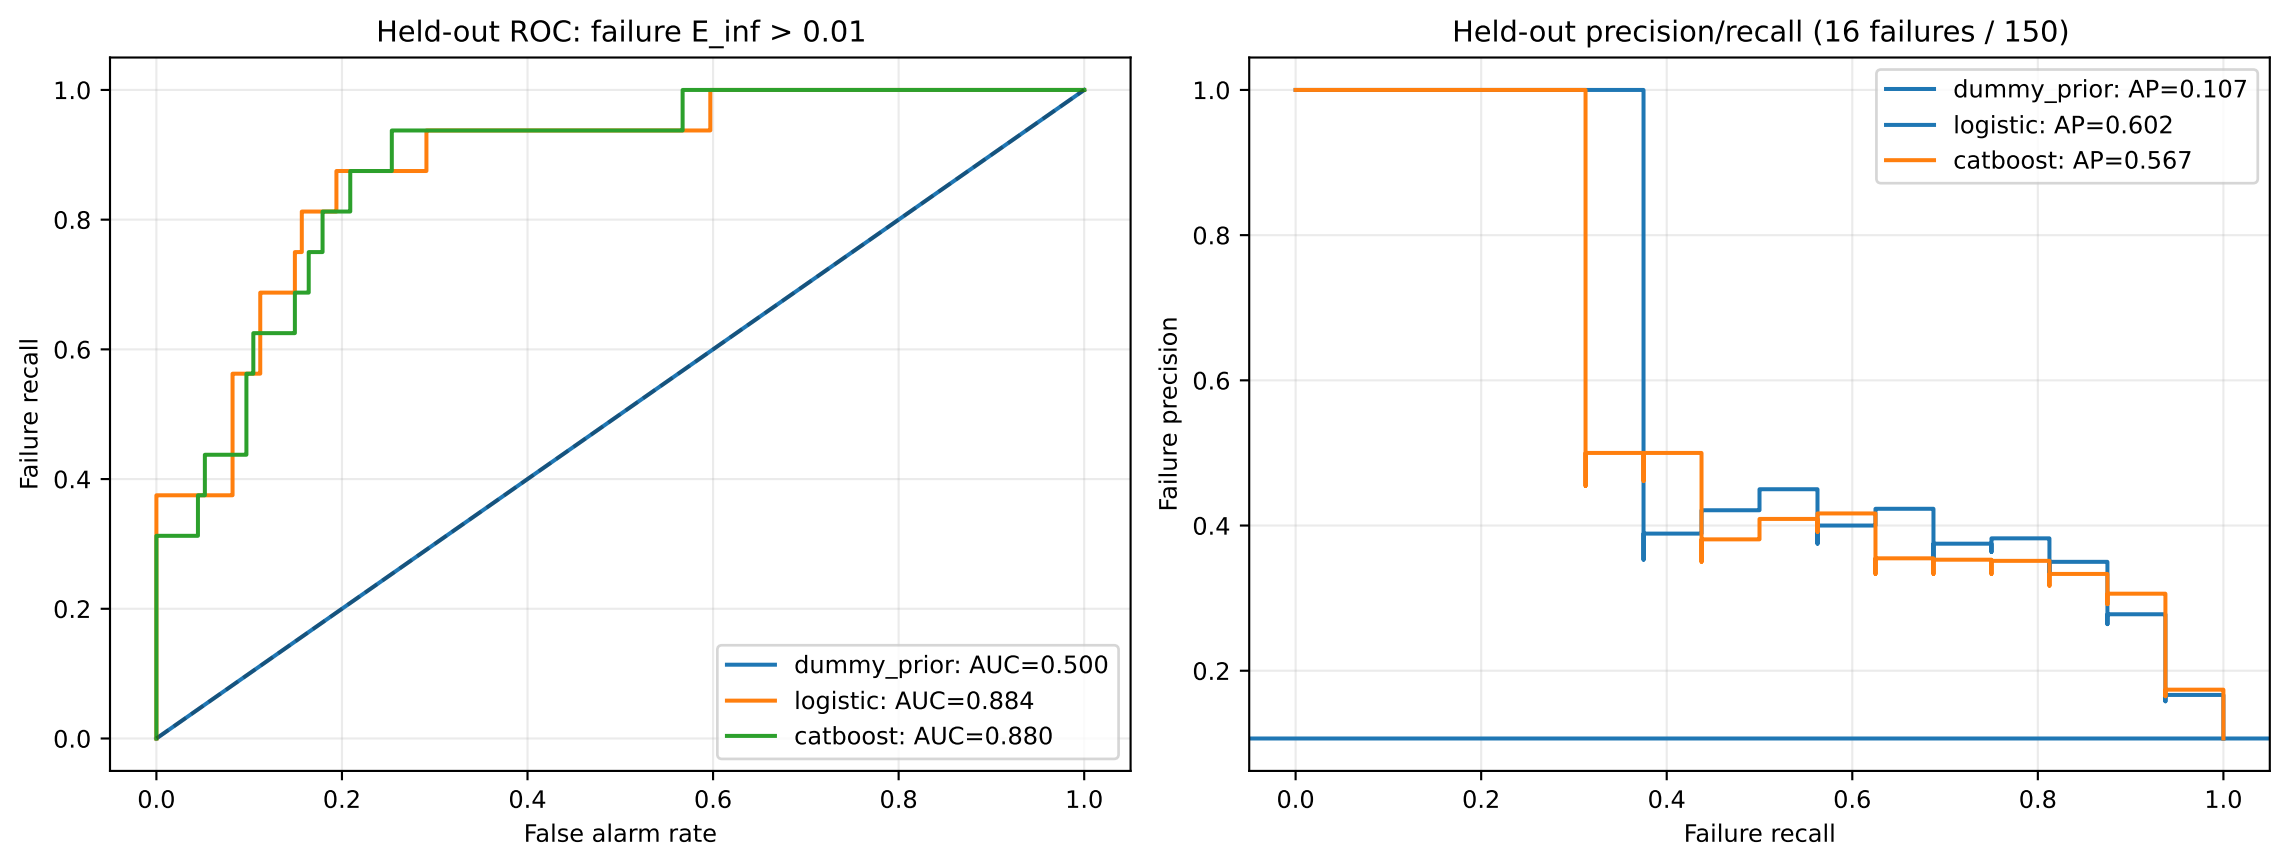
Held-out ROC: failure E_inf > 0.01
Failure recall
False alarm rate
dummy_prior: AUC=0.500
logistic: AUC=0.884
catboost: AUC=0.880
Held-out precision/recall (16 failures / 150)
Failure precision
Failure recall
dummy_prior: AP=0.107
logistic: AP=0.602
catboost: AP=0.567